

SPM WALL PROTECTIONS AND HANDRAILS

gerflor.com

2013 COLLECTION



Gerflor[®]
theflooringgroup

CONTENTS

- ▶ Responding to all your demands 5
- ▶ A range that respects the environment 6
- ▶ Gerflor continues to innovate for you 7
- ▶ A practicable guide: solutions for all your needs 8/9

Selection guide : Specific solutions per sector 10/21

- ▶ Specific solutions per sector 10/11
- ▶ Health - Hospital - Clinic 12/13
- ▶ Retirement home - Handicap 14/15
- ▶ Education 16/17
- ▶ Service sector 18/19
- ▶ Industry - Sport 20/21

Colour range 22/27

- ▶ A palette of 31 colours 22/23
- ▶ Two-colour combinations / Decors 24/25
- ▶ Decowood range 26/27



Wall protection 28/45

Gerflor has developed a range of three products that have been tested: wall protection rails, protection plates and the Decochoc panel.



Corner protection 46/53

Our corner protectors are adhesived or with aluminium core and can be applied to all corners, whether right angled or not. All have the same properties: they resist impact and the effects of cleaning products and have Bs2d0 fire resistance rating.



Door protection 54/63

Gerflor has developed a range of plates and panels to suit all types of door. The panels come in a variety of original and decorative shapes and can be folded into L and U bends to protect edges or can be thermo-formed to protect frames.



Handrails 64/75

They are ergonomic, and also provide wall protection. SPM handrails are made from a combination of PVC and aluminium and cater for all your needs: they ensure mobility and provide security, and can be adapted to fit any building (curved surfaces, corners at variable angles, service ducts, staircases).

Technical Solutions 76/79

Colour availability summary chart 80/83

Documents and sample cards available 84/85



RESPONDING TO ALL YOUR DEMANDS

► PRIORITY TO HYGIENE



100% of bacteria are killed 30 minutes after decontamination

Hygiene standards

SPM commissioned an independent laboratory's hospital hygiene department, the Institute Pasteur of Lille, to perform a cleaning/decontamination study on its products. The tests conclude that SPM products, when cleaned in accordance with methods, detergents and disinfectants used within hospitals, can achieve effective decontamination levels and maybe also used in infectious risk critical areas. (Test reports No. C/0510506M and 1100908M)



Bacteriostatic PVC

The entire Gerflor range is specially designed to prevent build-up of dust and germs. The non-porous surface and rounded design of every product are the result of in-depth engineering studies. (Nosoco. tech laboratories, test reports n°10053101 and 10053102)

Chemical resistance

Gerflor uses independent testing laboratories to demonstrate how well its PVC extruded sections stand up to standard cleaning, disinfection and antiseptic products used in the healthcare and public buildings. (ANIOS Laboratory, test report n°17242.04/219, BIOQUELL® test report n° TD 041-003-14).

► PRIORITY TO PROTECTION

Impact resistance

To guarantee impact resistance, Gerflor tests its products in real operating conditions.

The weights to which they are subjected correspond to those of trolleys and the impact speeds reflect those of people on the move (320 kg at a 3 km/h speed).

Wrenching strength SPM

Several SPM products have been subjected to extremely

severe tests and have demonstrated their ability to resist tear-off. (CSTB Test n°BP13-6-4042-2)

Fire rating

Whatever its colour, the formula for Gerflor PVC includes Bs2d0 fire rating according to EN 13501-1. To be eligible for this classification, our products (profiles and accessories) are submitted to full tests carried out by the licensed laboratories.

This body issues classification certificates based on the results obtained in its tests.



A RANGE THAT RESPECTS THE ENVIRONMENT

Gerflor manufactures its wall protection products and handrails from non-polluting and eco-friendly materials. All Gerflor's products exceed the requirements of current regulations.

Exemplary composition

• Non-polluting materials

Gerflor's PVC products contain no heavy metals such as lead, cadmium, arsenic, tin, etc

• Calcium-zinc thermal stabilisation


Gerflor has chosen to use calcium-zinc stabilisation, which is non-toxic and poses no environmental threat. Gerflor is therefore ahead of the game, emphasising yet again its commitment to sustainable development.

Air quality

Our products are tested according to the norms serie ISO 16000.

They have a rate of less than 100 µg/m³ over 3 days.

According to french regulations



* Information about the emission level of volatile substance in inside air, involving a toxic risk by inhalation, on a scale from A+ (very low emissions) to C (high emissions).


Recycling

Our materials are mainly PVC and aluminium and thus 100% recyclable. To this end, all the offcuts from the manufacturing process are also recycled.

Reduced environmental impact during installation and in use

• Adhesives

We recommend the use of Gerflor adhesives when installing our products, either a water-based acrylic adhesive or a universal mastic glue on a MS polymer base. These adhesives use no solvents and thus present no threat to either the users' health or the environment.



• Reduced levels of waste through custom-made lengths

Gerflor offers a pre-cutting service (standard lengths from the catalogue or made to measure) that eliminates wasteful offcuts and recycles the offcuts from the sizes cut to length.

• Cleaning and maintenance

The products are easy to clean and reduce the consumption of both water and cleaning products.

• Durability

Gerflor's solutions extend infrastructural life spans and also extend considerably the intervals between wall repair and renovation work.



Health, Quality and Environmental guidelines: Gerflor products are suitable for use in building projects adopting High Quality Environment (HQE) standards.

European REACH Regulations

European Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) regulations are intended to improve protection standards for human health and the environment. They require all manufacturers to declare any chemical substances listed as hazardous that may be used in the composition of their products. None of the substances used to manufacture Gerflor's products appears in the list drawn up under the REACH regulations.



GERFLOR CONTINUES TO INNOVATE FOR YOU IN A NUMBER OF OTHER DOMAINS.

Gerflor conforms to environmental regulations by offering products with no risk to human health and the environment, whilst also coming up with new ideas in several other fields.

A colour range extended to 31 shades, that are both versatile and varied, in order to offer greater choice whilst allowing for tonal matching or contrast.

A new Decochoc finish, that is less bright and less shiny, that is intended for easier incorporation into all sorts of colour schemes whilst retaining the usual levels of resistance to impact, scratches, wear and chemical agents.

Wood and trend decors:

The successful Decowood range is enriched with new wood effects whilst the Decotrend decors will provide you with new sources of inspiration.



Decokid and Decoprint panels:

Decokid: an innovative educational message for children that provides wall protection at the same time. Decoprint panels protect and personalise your walls and doors (reproduction of photos, drawings, messages).

Exciting and proven hygiene solutions:

• **Decontamination**

The Pasteur Institute in Lille has proven that our products meet high standards of decontamination when cleaned using the current practices found in hospital environments and those recommended for Level 3 and 4 infectious risk areas under the Pasteur classification scheme (Test reports n° NC/0510506M and 1100908M).

• **The bactericidal joints** used with our handrails help in the fight against the transmission of hand-borne contamination, which is responsible for the great majority of hospital acquired infections. (Nosoco. tech laboratories, test report n°08112803)

Accessibility: We have developed numerous solutions to meet accessibility requirements:

• **The option of high visual contrast** using a well thought-out range of colours that provide wall protection in neutral and natural shades against which our handrails, in their bright, vivid colours, stand out and are immediately visible to users with impaired vision.

• **Powerful visual identifiers** based on outline shapes and inlays that customise doors and walls and make it easier to recognise places and find one's way, especially for those with impaired cognition.

• **Tactile identifiers** are available for Escort handrails using their unique design of finishing strip that can be customised on request.

• **A double bracket** for the simple installation of Escort handrails at two heights, one standard, the other for children and those using wheelchairs.



Simplify the installation of our products with our assistance:



• **Before starting work:**

Gerflor can offer advice and guide you in the choice of materials during the project design phase, through design work, help with dimensions (especially for customised products) and site-specific advice.

• **Whilst work is in progress:**

Gerflor can be present at the start and help train the installation staff. We have also made all our expertise available in the form of our new Gerflor product Installation Guide. This clearly details the installation requirements and the steps to follow for an impeccable and fault-free installation.

• **When the work is complete:**

Most of our profile strips come with a peel-off protective film to protect them from any marks whilst work is in progress. When left on until the time of acceptance, this film prevents the need for complete cleaning of our products.

An engineering & applications sales team near to you

Our staff has been increased in order to provide you with a better service.

A PRACTICAL GUIDE

SOLUTIONS FOR ALL YOUR NEEDS

The solutions

Gerflor has worked closely with its customers, in order to understand their specific needs. This partnership has led to the development of a complete range of solutions that cater for your every need. Whether you need to protect walls from impact and wear, shield areas that are prone to damage, or install handrails that provide both protection and aid mobility – whatever you require, Gerflor has the total solution for you.



Assistance: for any advice please contact us

Toolbox



You can easily identify all the necessary installation equipment at a glance.

Specification

It provides you with the necessary information about specifications, such as technical information, a complete description and fitting instructions.

Applications


By detailing the practical applications of each product we can help you to make the right choice for your particular needs.

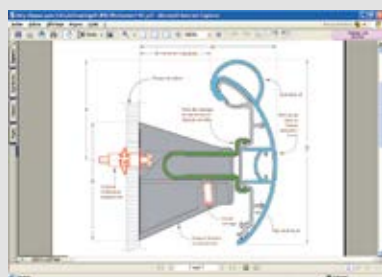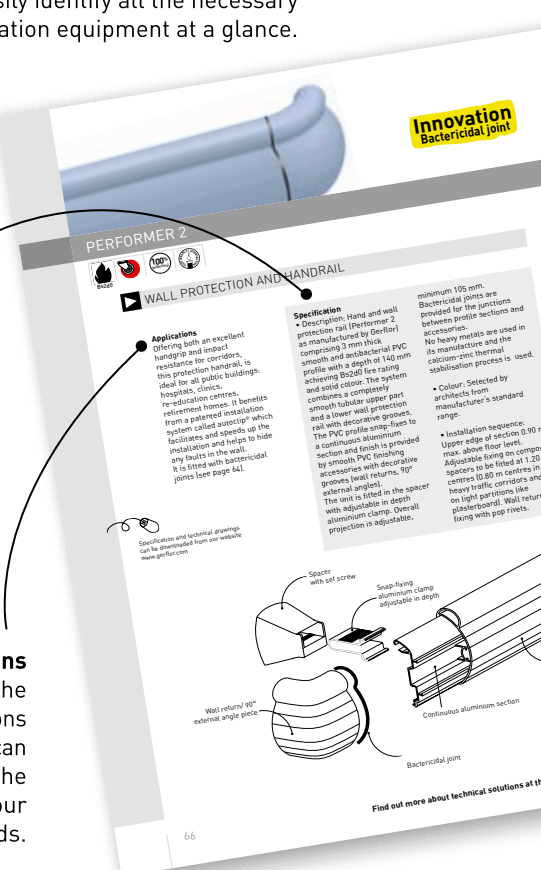

gerflor.com

PRACTICAL INTERNET

All our technical information-specifications, technical drawings (scale 1)- and installation advices can be downloaded from our website.

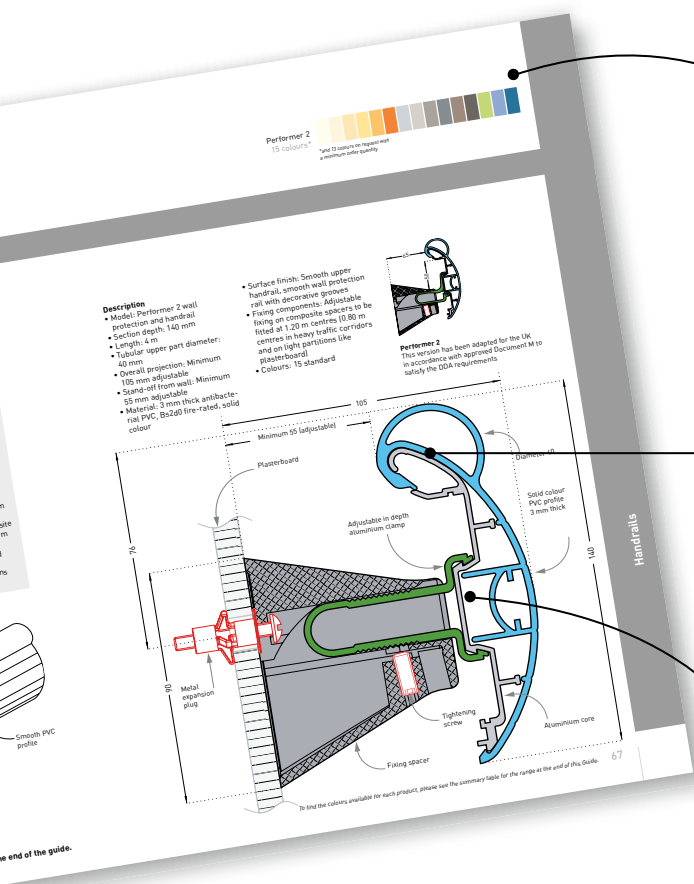

Range of colours
See all the colours available for the product at a glance

Technical drawings
This enables you to see everything clearly (scale 1): the strong points and particulars of each of our products, including the mounting systems.

Installation procedures
To help with the installation of our products, the installation procedures guide is available upon request.

A single colour code
The same colour code is used throughout: blue for the profiles, orange for contrast strips and finishing, grey for the aluminium mountings, green for interlocking parts, and red for screws and glues.

Product overview

This provides you with all the information concerning a particular product.

CLASSIFICATION FOR PROTECTION REQUIREMENTS

- Solutions for "protection" vary according to which areas of a building are subjected to impact, or intensive use by people and mobile equipment.
We have established a classification system for the various applications and have given them a colour code that can be used as a guide throughout our catalogue.



A COLOUR CODE FOR EVERY APPLICATION

Red > For heavy traffic areas

Intensively used areas that are subjected to hard impact



Green > For moderate traffic areas

Standard intensity areas that are repeatedly subjected to impact



Blue > For light traffic areas

Low intensity areas that are subjected to light impact and localised wear

SPECIFIC SOLUTIONS PER SECTOR



Health Hospitals, clinics

Priority for Hygiene

In operating theatres, clean-rooms, laboratories... hygiene has to be the number one priority more than anywhere else. We develop antibacterial and bacteriostatic PVC that do not collect germs and are resistant to disinfectants.

Impact resistance

Each corridor, each passage way has its own traffic. Our wall protection systems and handrails fit in with different impact intensities or wear, from occasional passage to heavy traffic.

Easy maintenance

Non-porous surfaces and curved shapes have been developed with hygienists to prevent germ incrustation. Our PVC is resistant to solvents, diluted acids and industrial detergents.

Simplified installation

Our products are designed to be easily installed and to limit noise and chemical pollution during the installation: easy and quick fitting together, odourless glues.

Retirement homes Handicap

Comfort

As the bedroom becomes the patient's main living room, the risks related to moving furniture is increased (beds, wheelchairs, service trolleys, chairs...). SPM wall protections protect against wear, whilst providing well-being and comfort.

Ergonomics

Our handrails are especially designed for a perfect handgrip and provide safe support for users.

Living environment

SPM wall protections and handrails enhance interiors whilst offering a warmer living environment, and contribute to well-being of the elderly. Pastel or bright, colours will fit perfectly into the existing décor and facilitate visual guidance.



Education

Heavy traffic

In public areas, the heavy and repeated flow of pupils or equipment creates premature and intensive wear and tear. So that these living and working areas are friendly and resistant, SPM has designed ranges of wall protections to meet these requirements.

Maintenance

SPM protection systems reduce wear and tear as well as impacts on walls and extend the lifetime of buildings. Easy to clean and maintain, they contribute towards reducing maintenance costs.

Aesthetic

SPM solutions help you to create and preserve pleasant settings, colourful and fun décors which encourages the well-being of toddlers. They enhance your premises whilst maintaining them in good condition.



Industry

Controlled environment

In the pharmaceutical sector, especially in clean rooms, the control of bacteriological contamination is essential. SPM develops solutions that meet these requirements.

High impact resistance

High-load trolleys pass through corridors, technical areas, logistical premises. SPM wall protections provide unmatched impact resistance and protect premises for a long time.

Quick installation

On-going activity must not be interrupted. SPM wall solutions are easy and quick to install, ensuring very short period of downtime of the premises.

Service sector

Enhance image

In areas where there are continuously lots of people such as hotels, restaurants, offices, a neat décor is welcoming and increase image. SPM solutions postpone wear and tear of walls and doors due to chairs, luggages, traces of dirt around door handles.... and give a decorative touch or can be subtle and and blend into the décor.



Sport

Large width protection

In gymnasiums, impacts (of balls, sticks, studs...) can appear anywhere. So it is important to protect the more exposed areas: lower parts of walls, doors, angles, in order to keep the premises in a good state. In other areas where physical activities are practiced (dancing, fitness and martial arts), the wall protection protects from wear and tear and makes maintenance easier.

Damp areas

The cloakrooms and notably the shower areas have to be protected against the damaging effects of dampness: corrosion, moulds. SPM solutions contribute to making these areas more waterproof : welded panels and doors protected with bends and cut-outs.

All SPM products have been designed and tested to be installed indoors.

SPM SPECIFICATIONS

HEALTH - HOSPITAL - CLINIC

	WALL PROTECTION										
	Impact / Alinea 200	Impact / Alinea 120	Impact 60	Contact 350	Contact 200	Contact 120	Decochoc (edge to edge, silicone joint)	Decochoc (hot welded)	Decoclean	Bedkit	Decowood panels
ACCOMMODATION: Corridors											
Patient rooms, Common areas	*				*		*				*
Hospital room (including bathrooms) Patient bedroom	*			*			*			*	*
Other											
Examination room Patient Preparation room, nursery, staff room	*					*	*				
Patients' lounge, relaxation room	*				*		*				*
Services area (laundry and equipment store)	*						*				
TECHNICAL MEDICAL PLATFORM: Emergencies											
Corridors	*						*				
Reception, waiting room	*				*		*				*
Examination and treatment room	*			*			*	*			*
Surgery or obstetric examination unit											
Corridors	*	*					*				
Operating theatre								*	*		
Recovery room								*	*		
Laboratories-Sterilisation											
Laboratories	*			*			*		*		
Central sterilisation and conditioning	*			*				*	*		
DAY-TIME HOSPITAL, CONSULTATION, FUNCTIONAL REHABILITATION, CENTRAL PHARMACY, MORGUE											
Waiting room and corridors		*									*
Consultation and external examination room					*		*				
Laundry and clean equipment store, pharmacy store	*						*				
Physiotherapy and occupational therapy room							*				
ADMINISTRATION, GENERAL SERVICES AND FACILITIES											
Staff restaurant, cafeteria				*			*				*
Laundry, laundry store	*						*				
Toilets, cloakrooms							*				
Central laundry, central kitchens and annexes	*	*					*				
Reception and corridors											
Hall and elevator area											
Stairs											

* SPM recommendation ■ Other possible solutions

SPM SPECIFICATIONS

RETIREMENT HOME - HANDICAP

	WALL PROTECTION										
	Impact / Alinea 200	Impact / Alinea 120	Impact 60	Contact 350	Contact 200	Contact 120	Decochoc	Decoclean	Bedkit	Decowood panels	Decotrend panels
CORRIDORS											
Moderate traffic corridors	*			*	*		*			*	*
Elevator	*	*					*				
Elevator landing	*	*					*				
ACCOMMODATION AND ROOM SERVICE											
Patient room	*			*	*		*		*	*	*
Wash room							*				
Sanitary arrangements							*				
PUBLIC PREMISES											
Residents' dining room, entertainment rooms	*	*		*			*			*	*
Relaxation, leisure room				*			*			*	*
CONSULTATION AND TREATMENT UNITS											
Nursing station		*			*		*				
Consultation room					*		*				
Physiotherapy, occupational therapy and functional rehabilitation room							*				
TECHNICAL PREMISES											
Product and equipment storage (treatments, nappies)	*						*				
Laundry room, laundry storage	*						*				
Central kitchen and annexes	*	*					*				



	CORNER PROTECTORS													HANDRAILS						
Decofresc Decorative frescoes	Capcorn	Cornea	Corneaflex	Decowood corner protector L-bent (in line with walls)	Protecta 2, Profila	Profil'inox	1/2 height door plate	Foot-height door	1/2 height decorative door	Handplates	1/2 height door plate Inlayed signage	Bendings Edges and frames	Plac'inox	Performer 2	Starline with PVC sheath	Anodised Starline	Decowood Starline	Escort with PVC sheath	Decowood Escort	Anodised Escort
	*	*	*	*	*		*		*		*	*			*			*	*	
	*	*	*												*			*	*	
	*			*	*							*	*							
					*	*	*	*	*	*		*	*							
					*	*			*		*	*	*							
	*	*		*	*				*		*		*							
	*			*	*				*		*									
					*			*		*										
					*			*		*										
					*		*		*		*							*	*	
		*	*				*			*	*	*								
		*	*				*			*	*	*	*							
		*	*				*			*	*	*	*							

* SPM recommendation Other possible solutions

SPM SPECIFICATIONS

EDUCATION

	WALL PROTECTION										
	Impact / Alinea 200	Impact / Alinea 120	Impact 60	Contact 350	Contact 200	Contact 120	Decochoc	Decowood panels	Decotrend panels	Decofresc Decorative frescoes	Decokid Educational panels
KINDERGARTENS AND NURSERIES											
Corridors					*	*	*			*	*
Entry hall, reception and relaxation areas					*	*	*			*	*
Classrooms					*		*				*
Stairs											
Play and exercise room				*			*				*
PRIMARY SCHOOLS											
Corridors					*	*	*			*	*
Entry hall, reception and relaxation areas					*	*	*			*	*
Classrooms					*		*				*
Stairs											
Play and exercise room							*				*
ELEMENTARY AND MIDDLE SCHOOLS											
Corridors				*	*		*				
Entry hall, reception and relaxation areas					*	*	*	*	*		
Stairs											
Classrooms				*	*		*				
Physical education areas							*				
Science and IT rooms, laboratories		*		*	*		*				
HIGHER EDUCATION											
Corridors				*	*		*				
Stairs											
Teaching rooms				*	*			*	*		
IT rooms											
Laboratories				*	*		*				
Accommodation (including student residences)					*		*				
ANNEX TEACHING AREAS											
Cafeterias, dining room, multi-purpose room				*	*		*	*	*		*
Sanitary arrangements					*		*				
Kitchens and annexes	*	*					*				
Corridors in a technical premises area	*	*					*				
Nursing station, medical area					*		*	*	*		
Archives, filing rooms	*	*		*	*						

* *SPM recommendation* *Other possible solutions*

SPM SPECIFICATIONS

SERVICE SECTOR

	WALL PROTECTION											
	Impact / Alinea 200	Impact / Alinea 120	Impact 60	Contact 350	Contact 200	Contact 120	Decochoc	Bedkit	Decowood panels	Decotrend panels	Decofresc Decorative frescoes	Decokid Educational panels
BUSINESS PREMISES												
Offices									*	*		*
Meeting rooms and waiting rooms									*	*		
ANNEXES AND TECHNICAL PREMISES												
Archives, filing rooms				*	*							
Toilets							*					
Company restaurant, cafeteria						*			*	*		
Central kitchen and annexes	*	*					*					
Corridors in a technical premises area	*			*	*		*					
HOTEL SECTOR: Accommodation												
Corridors in public areas				*					*	*		
Corridors in technical areas	*		*	*			*					
Entry hall, reception									*	*		
Stairs												
Waiting and meeting rooms									*	*		
Restaurant							*		*	*		
Bedrooms							*		*	*		
Sanitary arrangements					*		*					
Central kitchen and annexes	*	*					*					



CORNER PROTECTORS						DOOR PROTECTION								HANDRAILS							
Capcorn	Cornea	Corneaflex	Decowood corner protector L-bent (in line with walls)	Protecta 2, Profila	Profil'inox	Complete doors (2 sides)	1/2 height door plate	Foot-height door	1/2 height decorative door	Handplates	1/2 height door plate Inlayed signage	Bendings Edges and frames	Plac'inox	Performer 2	Starline with PVC sheath	Anodised Starline	Decowood Starline	Escort with PVC sheath	Decowood Escort	Anodised Escort	
			*																		
			*	*				*													
*				*			*	*	*	*	*										
				*				*		*	*										
*	*	*				*	*	*			*										
			*	*					*	*	*										
						*	*	*			*										
*	*	*				*	*	*		*		*									
			*	*					*	*	*										
				*					*	*	*							*	*	*	
			*	*				*													
			*	*						*	*										
*				*		*	*	*		*	*										

* SPM recommendation Other possible solutions

SPM SPECIFICATIONS

INDUSTRY - SPORT

	WALL PROTECTION											
	Impact / Alinea 200	Impact / Alinea 120	Impact 60	Contact 350	Contact 200	Contact 120	Decochoc	Decoclean	Decowood panels	Decotrend panels	Decofresc Decorative frescoes	Decokid Educational panels
LIFE SCIENCES												
Laboratory, clean rooms, airlocks							*	*				
Storage, laundry	*						*					
HEAVY INDUSTRIAL TRAFFIC (for areas with non-motorised trolleys)												
Corridors	*			*	*		*					
Conditioning							*					
Production							*					
Storage	*			*	*		*					

	WALL PROTECTION											
	Impact / Alinea 200	Impact / Alinea 120	Impact 60	Contact 350	Contact 200	Contact 120	Decochoc	Decoclean	Decowood panels	Decotrend panels	Decofresc Decorative frescoes	Decokid Educational panels
HEAVY TRAFFIC AREAS												
Circulations				*	*		*		*	*		
Stairs												
SPORTS AREAS												
Gymnasium							*				*	*
Fitness and body building room							*		*	*	*	*
PUBLIC AREAS												
Cafeteria, bar					*	*	*		*	*		
ADMINISTRATION / ADMINISTRATIVE OFFICES												
Cloakrooms							*		*	*	*	*
WET ROOMS												
Showers / Sanitary arrangements					*		*					



CORNER PROTECTORS						DOOR PROTECTION								HANDRAILS						
Capcorn	Cornea	Corneaflex	Decowood corner protector L-bent (in line with walls)	Protecta 2, Profila	Profil'inox	Complete doors (2 sides)	1/2 height door	Foot-height door	1/2 height decorative door	Handplates	1/2 height door plate Inlaid signage	Bendings Edges and frames	Plac'inox	Performer 2	Starline with PVC sheath	Anodised Starline	Decowood Starline	Escort with PVC sheath	Decowood Escort	Anodised Escort
	*	*				*	*				*	*								
						*						*								
	*	*			*	*				*	*	*	*							
	*	*			*	*	*			*	*	*	*							
	*	*			*	*	*			*	*	*	*							

CORNER PROTECTORS						DOOR PROTECTION								HANDRAILS							
Capcorn	Cornea	Corneaflex	Decowood corner protector L-bent (in line with walls)	Protecta 2, Profila	Profil'inox	Complete doors [2 sides]	1/2 height door	Foot-height door	1/2 height decorative door	Handplates	1/2 height door plate Inlaid signage	Bendings Edges and frames	Plac'inox	Performer 2	Starline with PVC sheath	Anodised Starline	Decowood Starline	Escort with PVC sheath	Decowood Escort	Anodised Escort	
*				*				*	*	*	*								*	*	*
*				*			*	*	*	*	*										
*			*	*				*	*		*										
			*					*		*											
				*	*			*	*	*	*	*									
			*	*				*	*	*	*	*									
				*			*	*	*	*	*	*									
				*			*	*	*	*	*	*									

* SPM recommendation ■ Other possible solutions

SPM WALL PROTECTION AND HANDRAILS

A PALETTE OF 31 COLOURS

Let wall protection play a dynamic role in decoration

Gerflor offers a range of colours, totally redesigned with the help of architects, interior designers, users, etc.

The colour chart extended to 30 colours, from the most sober to the most daring, gives a new identity to interior designs whilst blending perfectly with other decorative elements such as floors, walls, doors, etc.

The range brings together neutral, sober, mineral shades that blend naturally with architectural design and vivid, refreshing, full-bodied and youthful colours.

Tinted greys now appear in the palette to provide subtle, muted ambiances.

NEW

3 exclusive coloured greys for the protection and covering panel Decochoc.

Let Gerflor's wall protection play a dynamic role in the aesthetic appearance of your facility.

Please note

LRV (Light Reflectance Value) measures based on Decochoc panels.

In order to speed up delivery of your orders, we have adapted our colour range in line with our products:

- Most of our products are available in all 31 colours in the range.
- Certain products, however, are only immediately available in 15 colours, with the other 13 colours available on request*.
- The remaining products come in 5 colours with the other 23 colours available on request*.

Each product display page shows the number of colours available and there is a summary table p.80 to 83 of the guide for all the products.

* with a minimum order quantity



0022 Apricot - LRV 56.7




0021 Straw - LRV 65.5



0016 Glacier - LRV 64.2



0027 Melon - LRV 35.9



0024 Bamboo - LRV 52.4



0018 Azure - LRV 44.5



0028 Poppy - LRV 16.7




0023 Meadow - LRV 53.6



0017 Bluebell - LRV 36.9



0029 Garnet - LRV 11.4



0025 Emerald - LRV 29.3



0015 Lavender grey - LRV 34.7



0030 Iris - LRV 17.4




0019 Ultramarine - LRV 28.4




0020 Denim - LRV 16.8



0006 Ivory - LRV 82.5



0014 Cinnamon - LRV 40.1




0011 Pebble - LRV 56.2




0001 Chalk - LRV 85.8




0007 Wicker - LRV 70.9



0009 Sienna - LRV 27.2




0002 Gravel - LRV 53.4




0031 Alum - LRV 72.6




0008 Sand - LRV 52.5




0010 Bark - LRV 16.3




0003 Clay - LRV 33.3




0032 Flint - LRV 43.0



0013 Greige - LRV 40.7



0005 Schist - LRV 16.3



0004 Granite - LRV 25.1



0033 Slate - LRV 6.5

NEW

+ 3 GREYS
EXCLUSIVE FOR DECOCHOC

Colours are not contractually binding.

SPM WALL PROTECTION AND HANDRAILS

TWO-COLOUR COMBINATIONS

For **Alinea** wall protection rails
For **Cornea and Protecta** corner protectors



0124 - CHALK + bamboo



0102 - CHALK + gravel



0107 - CHALK + wicker



0121 - CHALK + straw



0109 - CHALK + sienna



1101 - PEBBLE + chalk



1120 - PEBBLE + denim



1127 - PEBBLE + melon



1105 - PEBBLE + schiste



1121 - PEBBLE + straw

For **Starline** handrails
3 profile finishes



Chalk PVC sheathed

6 two-colour protection band




Gravel PVC sheathed




Anodised aluminium



0224 - Gravel + Bamboo band



0201 - Gravel + Chalk band



0220 - Gravel + Denim band



0227 - Gravel + Melon band



0221 - Gravel + Straw band



0209 - Gravel + Sienna band

DECORS

For **Decotrend** panels that combine decoration and protection



0050 Brushed aluminium



0051 Composite

Gerflor has designed some new finishes to inspire the creation of individual, distinctive and damage resistant spaces. These new finishes lend themselves to some astonishing visual effects: a shaped perspective view with 'Composite' and the striking appearance of 'Brushed Aluminium'.

For **Decofresc** decorative frescoes

Savannah theme



Picture 0



Picture 1



Picture 2



Picture 3

Maritime theme



Picture 0



Picture 1



Picture 2



Picture 3

Mountain theme



Picture 0



Picture 1



Picture 2



Picture 3

For **Decokid** educational panels



1. I cross the road at a pedestrian crossing.



2. Early to bed, early to rise.



3. 30 mph, that's the urban speed limit.



4. I always say, 'Hello'.



5. I always put my rubbish in the bins provided.



6. I always wash my hands before eating.



7. I always wear my seat belt in the car.




8. I take breaks from my video games.



9. I always wash my hands after using the toilets.



10. No pushing.



11. I never leave the tap running.

Colours are not contractually binding.

SPM WALL PROTECTION AND HANDRAILS

DECOWOOD RANGE

8 WOOD EFFECT FINISHES

A coordinated range

Gerflor offers a full range of decorative wood finishes for use in those establishments that wish to combine wall protection and handrails with the warmth of wood. This range consists of products matched to various requirements, providing safety for all with the Escort and Starline handrails, wall and door protection with Decowood protective panels and corner protection with the bent panel Decowood

A wide choice of wood finishes

The range has been expanded with new wood finishes, chosen to suit all interiors. To the six existing lines Cerused Grey and Wenge we have added. The Escort and Starline handrails are also available in Cherry.

For **Decowood Escort** Handrail



0060 Maple



0061 Beech



For **Decowood Starline** Handrail



0060 Maple



0061 Beech



For adhesive corner protector in bent **Decowood**




For **Decowood** protection panels



0060 Maple



0061 Beech

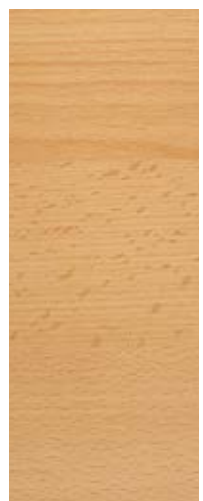

New Wood Finishes

0062 Light Oak



0063 Cherry



0064 Mature Oak



0065 Stripped Pine



0066 Cerused grey



0067 Wenge



0062 Light Oak



0063 Cherry



0064 Mature Oak



0065 Stripped Pine



0066 Cerused grey




0067 Wenge



0062 Light Oak



0064 Mature Oak

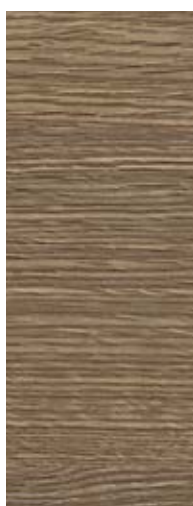

0065 Stripped Pine



0066 Cerused grey




0067 Wenge



Colours are not contractually binding.



SPM WALL PROTECTION



Clinique Sarrus Teinturiers - Coloriste N. Bernat



All public buildings have similar difficulties: premature deterioration together with wear and tear of their premises. Corridor walls, corners and doors are constantly knocked by trolleys and are damaged by continuous pedestrian traffic. In addition to preserving the interior, asepsis is absolutely imperative in operating theatres and clean rooms. Gerflor has developed three ranges of products that have been tested in order to offer you the most appropriate solutions – wall protection rails, protection plates, and the Decochoc panel. All are resistant to impact, germs and cleaning products. They are made from solid-colour and antibacterial PVC therefore the colour will not alter with cleaning or time.

	Code	Description	Material	Colour range
IMPACT		Wall protection rails	PVC	28 colours
ALINEA		Wall protection rails with contrast strip	PVC	10 two-colour options
CONTACT		Protection plate	PVC	28 colours
DECOCHOC		Protection and covering panel	PVC	31 colours
DECOFRESC		Protection and decorative fresco	PVC	3 themes with 4 pictures each 1 theme with 2 patterns
DECOPRINT		Customized protection panel	PVC	-
DECOCARE		Hand-hygiene protection panel	PVC	2 models
DEKOKID		Protection and educational panel	PVC	11 models
DECOCLEAN		Smooth protection panel	PVC	5 colours
DECOWOOD		Decorative protection panel	PVC	7 wood effect colours
DECOTREND		Decorative protection panel	PVC	2 trend decors
PLAC'INOX		Protection plate	Stainless steel	Brushed
BEDKIT		Bed head protection	PVC + aluminium	28 colours



IMPACT 200 p.30-31

Wall protection rail
height 200 mm



IMPACT 120 p.30-31

Wall protection rail,
height 120 mm




IMPACT 60 p.30-31

Wall protection rail,
height 60 mm




CONTACT 350 p.34-35

Protection plate,
height 350 mm



CONTACT 200 p.34-35

Protection plate,
height 200 mm



CONTACT 120 p.34-35

Protection plate,
height 120 mm



DECOCHOC p.36

Protection panel



DECOFRESC p.37

Protection and
decorative frescoe



DECOPRINT p.38-39

Customized
protection panel



ALINEA 200 p.32-33

Wall protection rail
with contrast strip
height 200 mm



ALINEA 120 p.32-33

Wall protection rail
with contrast strip
height 120 mm



DECOCARE p.40

Hand hygiene
protection panel



DECOKID p.41

Protection and
educational panel



THERMO-WELDING p.42

Welded joints



DECOCLEAN p.43

Smooth
protection panel



DECOTREND p.44

Decorative
protection panel



DECOWOOD p.44

Decorative
protection panel



PLAC'INOX p.45

Brushed stainless steel
protection plate



BEDKIT p.45

Vertical bed
head protection





Impact 200



Impact 120



Impact 60



IMPACT



200/120/60 HEIGHT WALL PROTECTION RAILS

Applications

This horizontal protection system features contoured design to bring you the perfect combination of impact resistance and sheer good looks. Fitted at one or two levels, it protects walls exposed to intensive wheeled traffic in corridors, entrances and storage areas (hospitals, clinics, retirement homes, laboratories, hotels, restaurants, schools, department stores).


Specification

- Description: curved wall protection system made of smooth and antibacterial PVC (Impact 200/120 or 60 as manufactured by Gerflor). PVC rails project 30 mm, are 200/120 or 60 mm deep and snap-fix to aluminium brackets or continuous aluminium core (optional). 3 mm thick, Bs2d0 fire-rated and solid colour, the PVC rails provide a smooth surface finish with decorative grooves. Finish is provided by end pieces, external and internal 90° smooth PVC angle pieces and aluminium joint blocks. No heavy metals are used in its manufacture and

the calcium-zinc thermal stabilisation process is used.


- Colour: selected by architects from manufacturer's standard range.

- Installation method: recommended height of protection rail centreline 0.80 m above floor level for mid-level wall protection or above plinth for low level wall protection. Snap-fixes to aluminium brackets spaced at 0.75 m centres or continuous aluminium core (optional).



Specification and technical drawings can be downloaded from our website www.gerflor.com

NB: The end piece serves as the first clip.

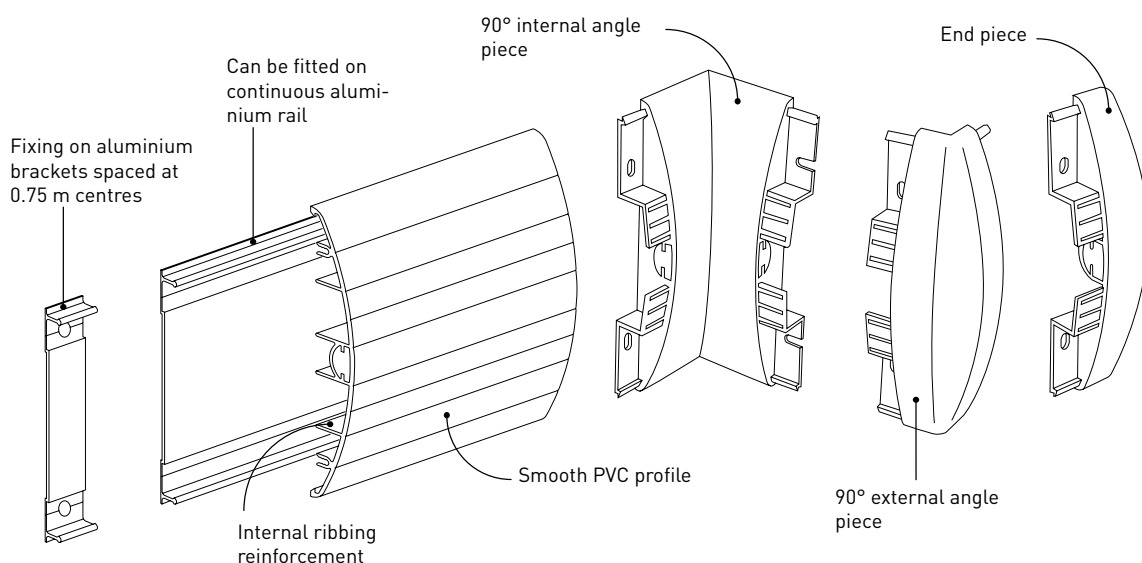


Impact 200/120
28 colours



Impact 60
5 colours*



*and 23 colours on request with a minimum order quantity

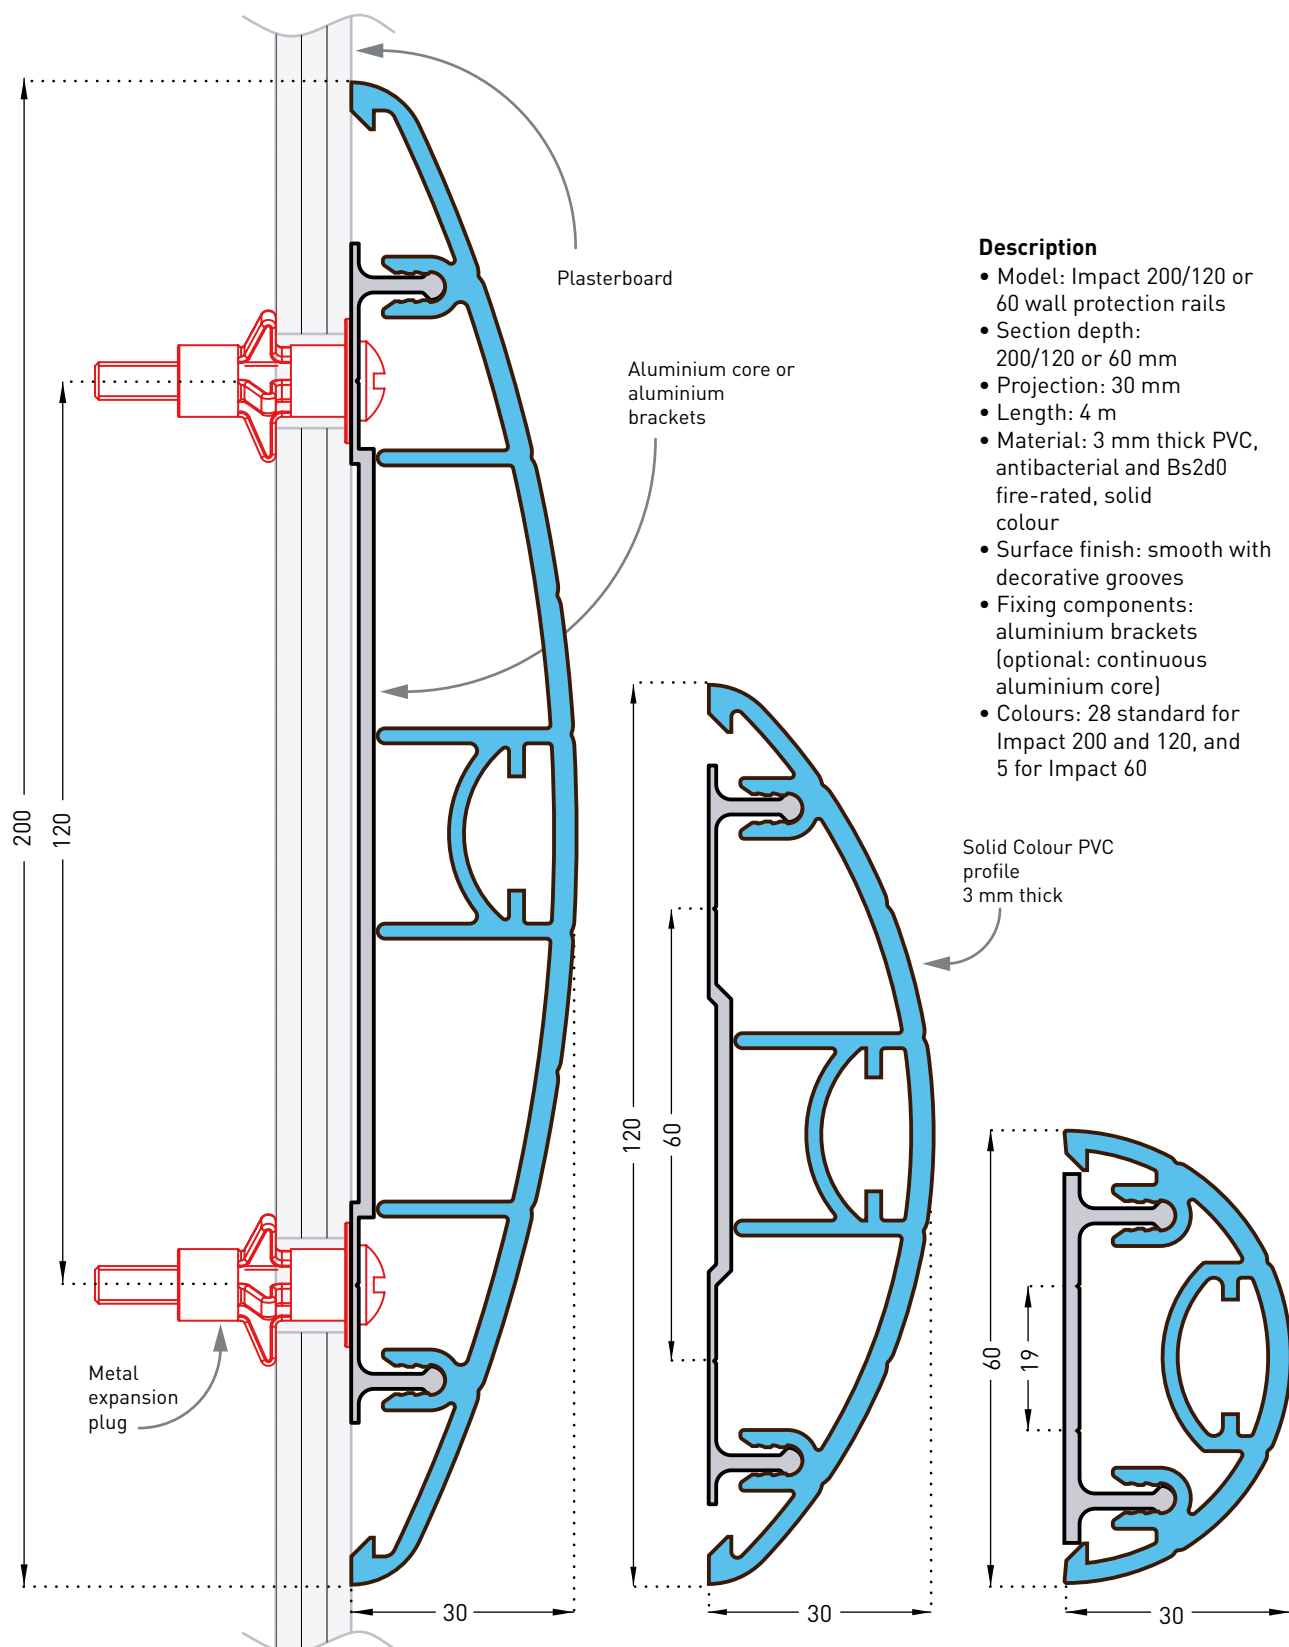

Description

- Model: Impact 200/120 or 60 wall protection rails
- Section depth: 200/120 or 60 mm
- Projection: 30 mm
- Length: 4 m
- Material: 3 mm thick PVC, antibacterial and Bs2d0 fire-rated, solid colour
- Surface finish: smooth with decorative grooves
- Fixing components: aluminium brackets (optional: continuous aluminium core)
- Colours: 28 standard for Impact 200 and 120, and 5 for Impact 60



Alinea 200



Alinea 120

ALINEA



200/120 HEIGHT WALL PROTECTION RAILS WITH CONTRAST STRIP

Applications

Thanks to its uniquely designed contrast strip, this two-colour wall protection rail is particularly suitable for decoration and colour coding. Ideally suited for use in corridors and access areas in hotels, restaurants, education premises, offices, hospitals and clinics.


Specification

- Description: curved wall protection system with a snap-fix contrast strip made of smooth and antibacterial PVC (Alinea 200/120 as manufactured by Gerflor). PVC rails project 33 mm, are 200/120 mm deep and snap-fix to aluminium brackets or continuous aluminium core (optional). 3 mm thick, Bs2d0 fire-rated and solid colour, the PVC rails feature a smooth surface finish with decorative grooves. Finish is provided by end pieces, external and internal 90° smooth PVC angle pieces and aluminium joint blocks. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: recommended height of protection rail centreline 0.80 m above floor level for mid-level wall protection or above plinth for low level wall protection. Snap-fixes to aluminium brackets spaced at 0.75 m centres or continuous aluminium core (optional).





Specification and technical drawings can be downloaded from our website www.gerflor.com

NB: The end piece serves as the first clip.

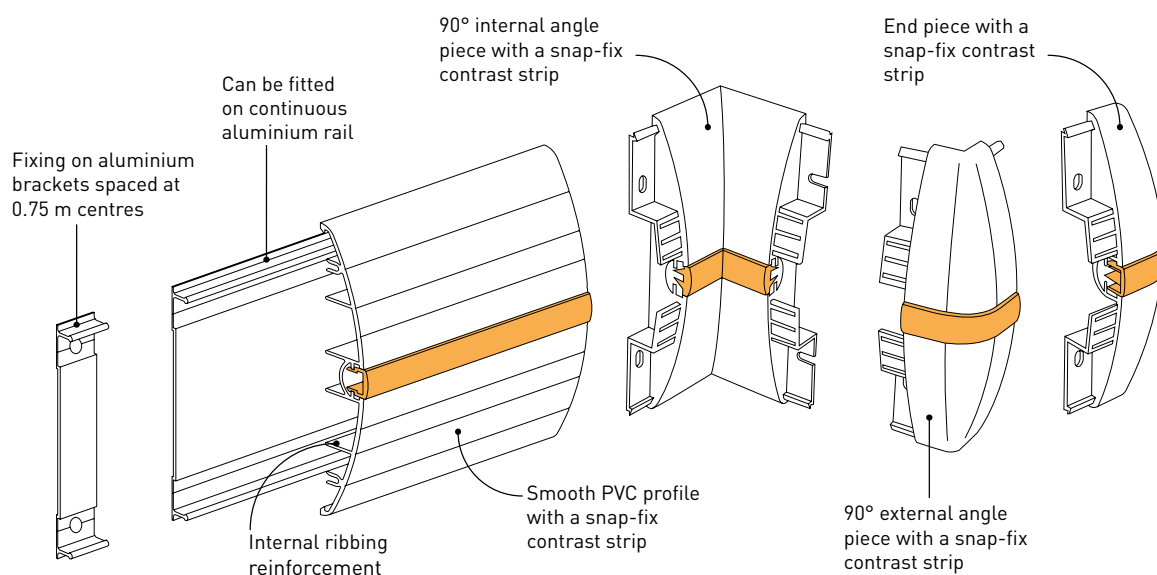

Alinea 200/120
10 two-colour combinations

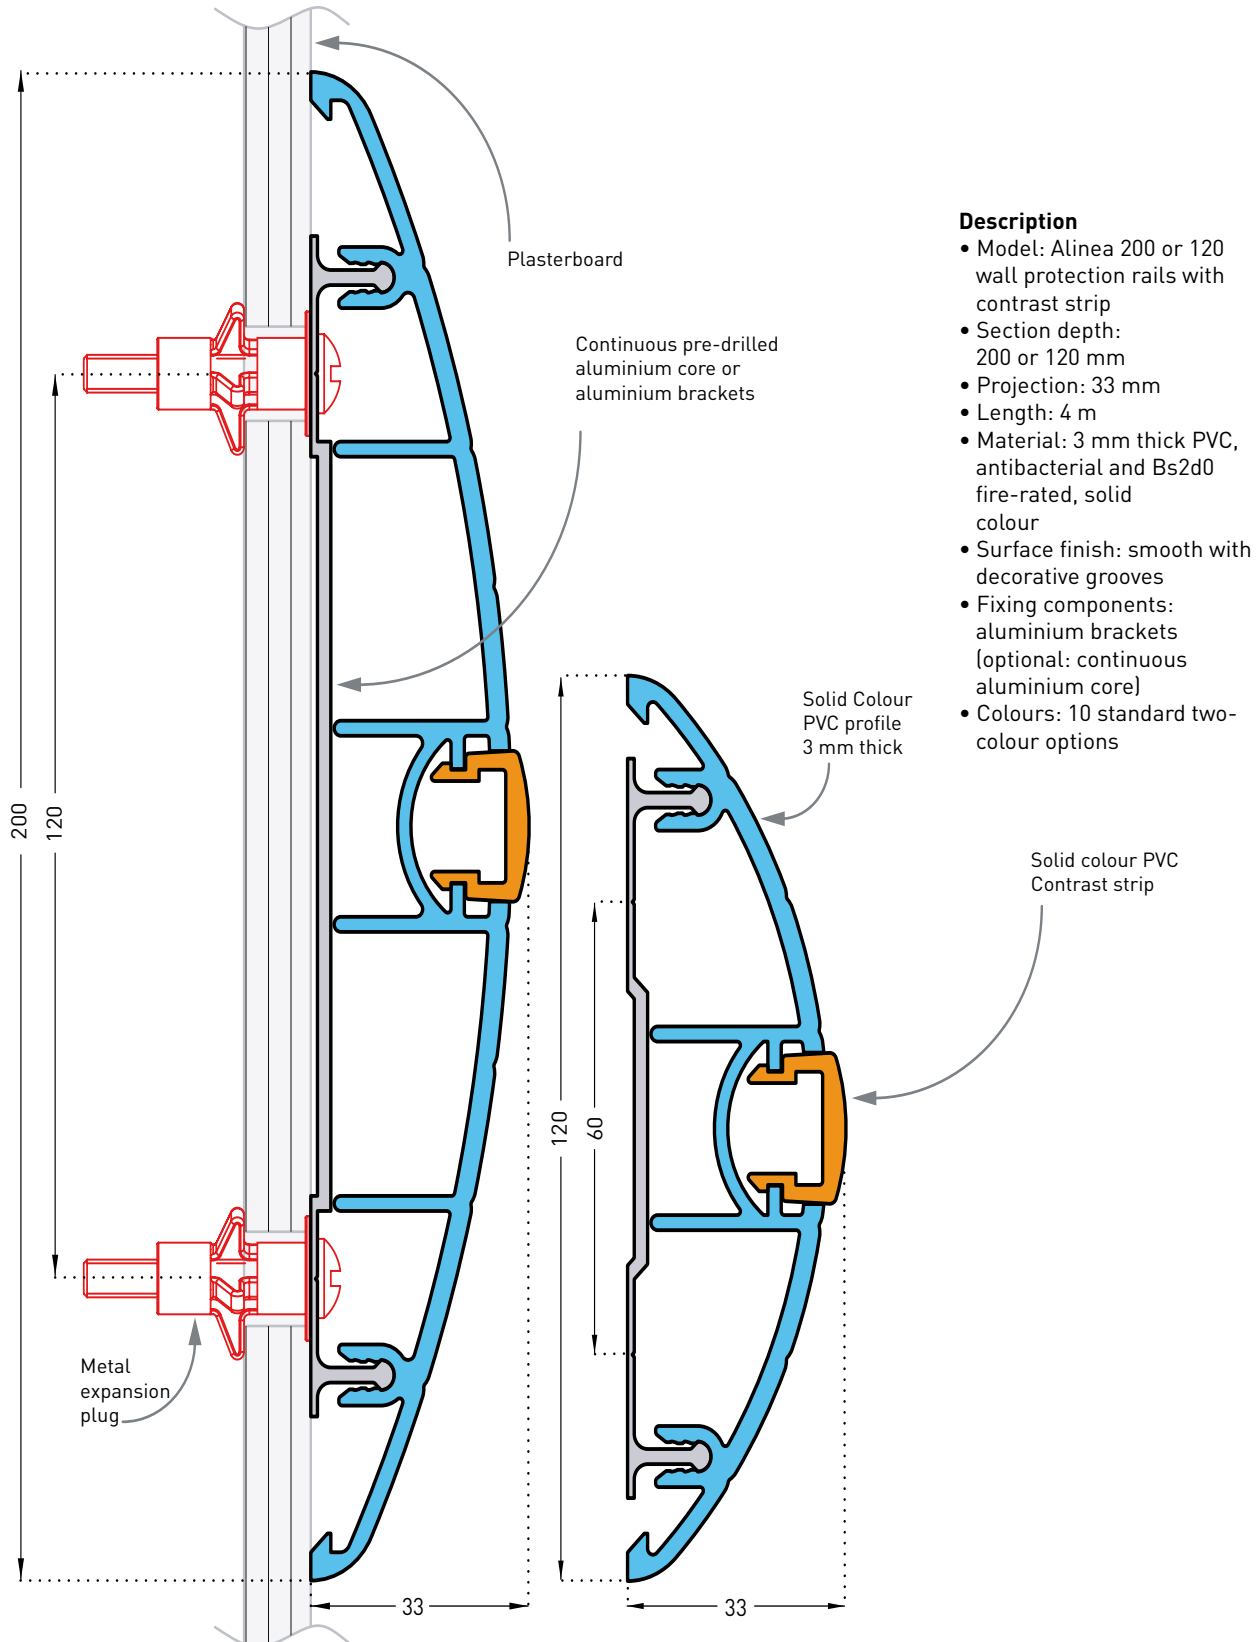

Description

- Model: Alinea 200 or 120 wall protection rails with contrast strip
- Section depth: 200 or 120 mm
- Projection: 33 mm
- Length: 4 m
- Material: 3 mm thick PVC, antibacterial and Bs2d0 fire-rated, solid colour
- Surface finish: smooth with decorative grooves
- Fixing components: aluminium brackets (optional: continuous aluminium core)
- Colours: 10 standard two-colour options

To find the colours available for each product, please see the summary table for the range at the end of this Guide.



Contact 350



Contact 200



Contact 120



CONTACT



350 / 200 / 120 PROTECTION PLATES

Applications

Both resistant and decorative, the Contact protection plates prevent damage to doors and walls exposed to abrasion by furniture, chairs and repeated impact from trolleys in corridors, bedrooms and waiting rooms in clinics and hospitals, schools, universities, hotels, restaurants and offices. It also matches the Impact 200 and 120 protection rails.


Specification

• Description: adhesive protection plates (Contact 350/200 or 120 as manufactured by Gerflor) comprising smooth and antibacterial PVC profiles with a depth of 350, 200 or 120 mm, 2.5 mm thick for Contact 350 and 200, and 3.5 mm thick midsection and 2 mm thick edges for Contact 120. PVC profiles achieve Bs2d0 fire rating, feature solid colour and a smooth surface finish with decorative grooves. Sections are delivered with 2 or 3 strips of adhesive foam for fixing. No heavy metals are


used in its manufacture and the calcium-zinc thermal stabilisation process is used.

• Colour: selected by architects from manufacturer's standard range.

• Installation method: adhesive. Gerflor universal mastic-glue is recommended for stronger fixing.



Specification and technical drawings can be downloaded from our website www.gerflor.com

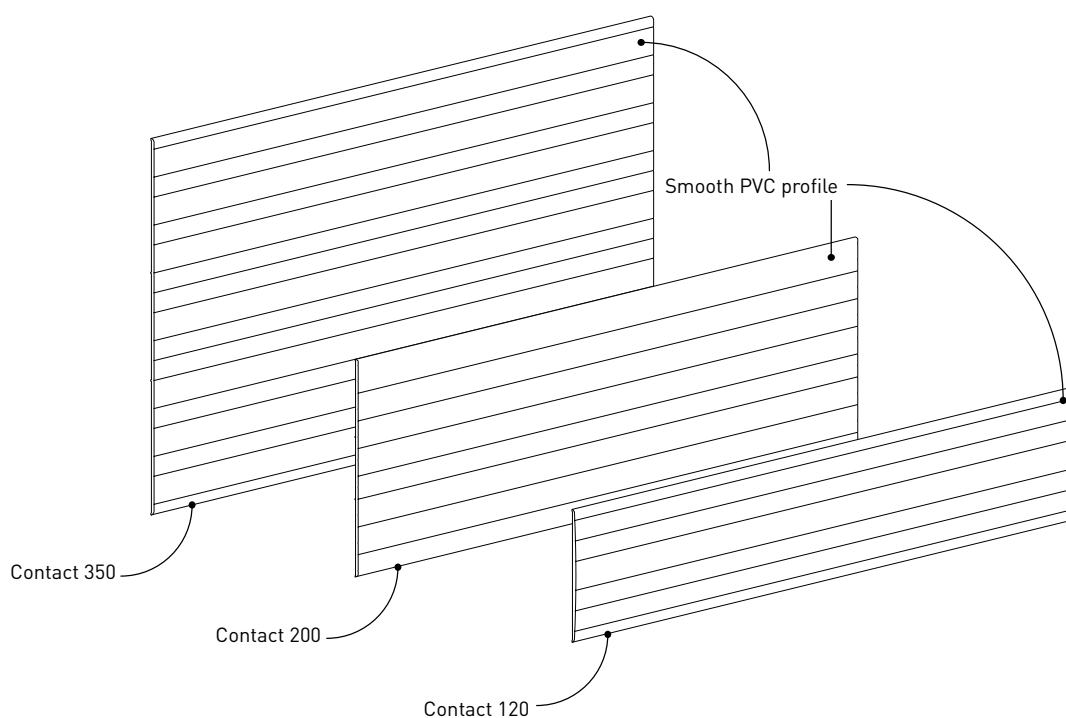


Contact 350
15 colours*

*and 13 colours on request with a minimum order quantity

Contact 200
28 colours

Contact 120
5 colours**

**and 23 colours on request with a minimum order quantity

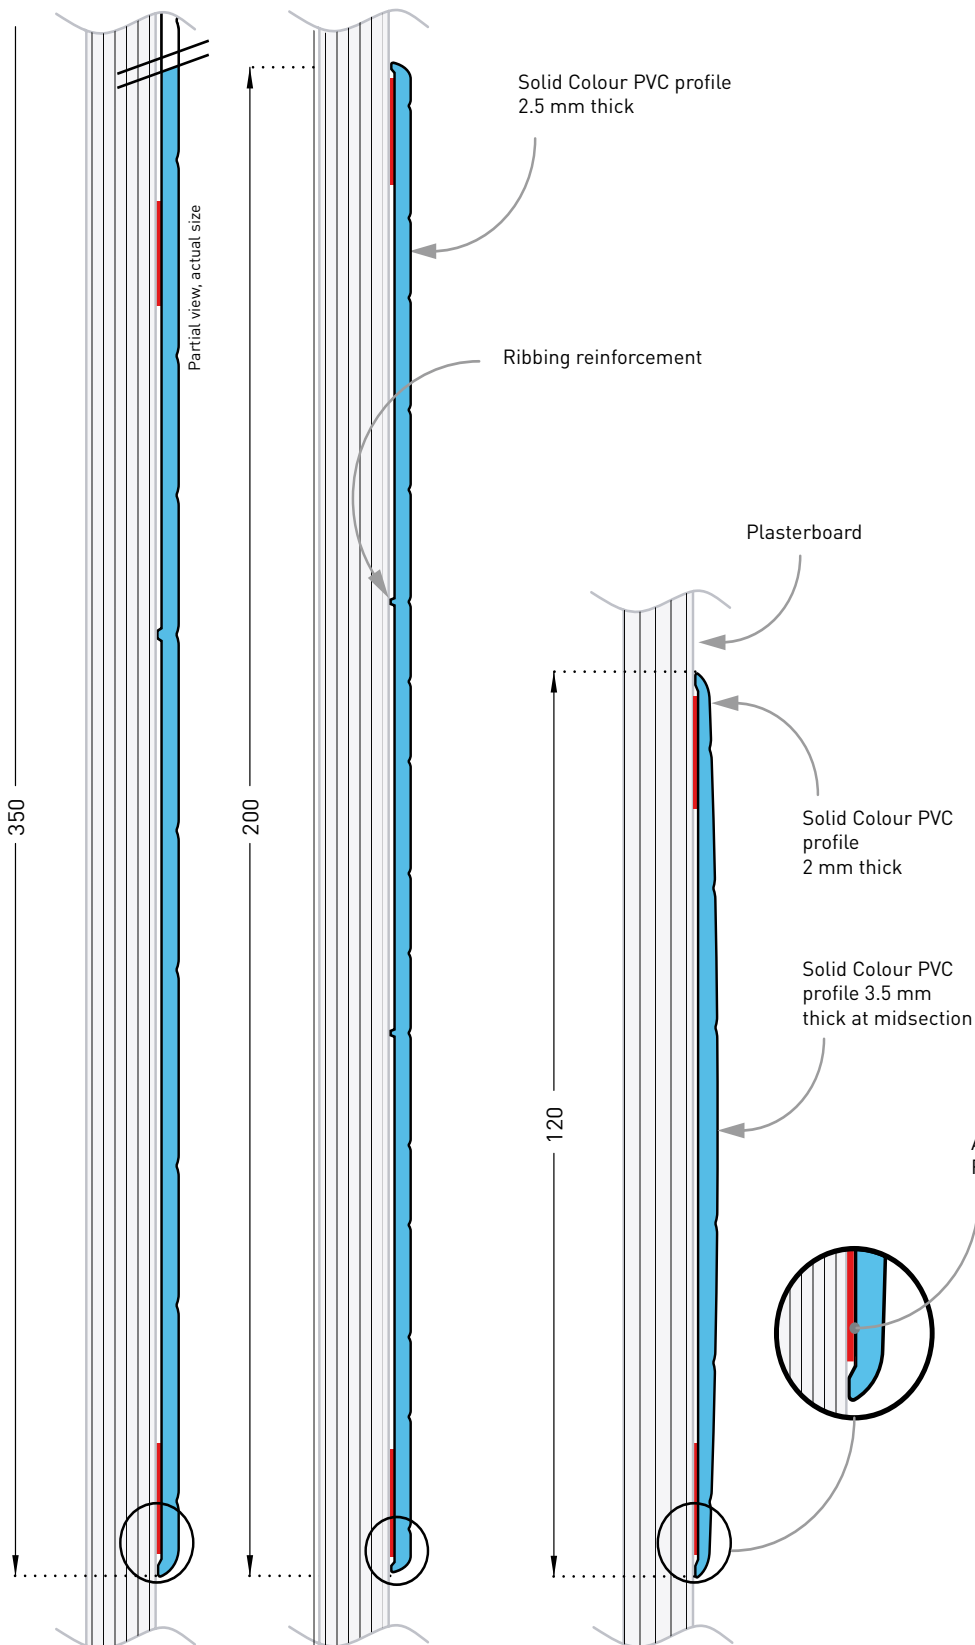

Description

- Model: Contact 350, 200 and 120 protection plates with adhesive tape
- Section depth: 350, 200 or 120 mm
- Thickness: contact 350 and 200: 2.5 mm contact 120: 3.5 mm midsection, 2 mm at edges
- Length: 4 m
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: smooth with decorative grooves
- Fixing: adhesive foam strips reinforced with Gerflor universal mastic glue
- Colours: 28 standard for Contact 200, 15 for Contact 350 and 5 for Contact 120.

DECOCHOC



PROTECTION AND COVERING PANEL

Applications

Wall protection for large surfaces in order to cover all parts exposed to impact. This panel can be used in rooms and some corridors (healthcare institutions, schools, etc) and both in operating theatres or clean rooms.

Its new finish is subtle and matt for a muted, sober appearance with all the usual levels of resistance to impact, scratches, wear and chemical agents.



Description

- Model: Decochoc protection and covering panel
- Standard panel dimensions: 3 m x 1.30 m
- Custom options: cutting to size, bends into L/U thermoformings, chamfers
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue. Joints between panels are made using silicone joints or PVC weld joints. Colour matched to the range
- Colours: 31 standard

Specification

- Description: protection and covering panel (Decochoc as manufactured by Gerflor) from rigid and antibacterial PVC achieving Bs2d0 fire rating with solid colour and textured surface. 3 m long, 1.30 m wide, 2 mm thick. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions.

Specification and technical drawings can be downloaded from our website www.gerflor.com

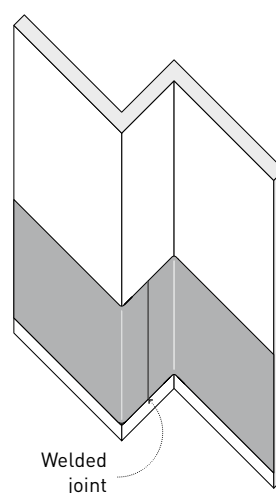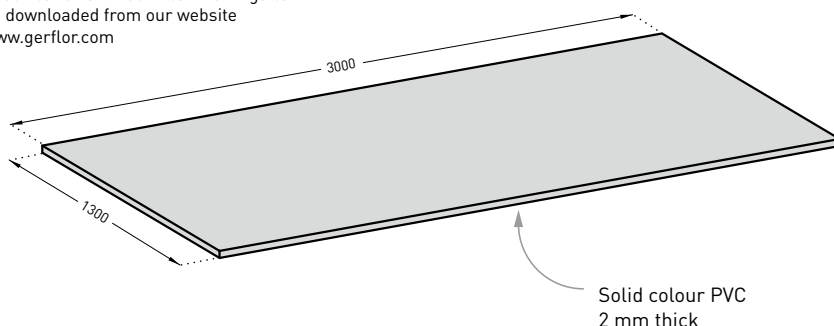

New accessories for an impeccable finish:

- Fin'alu: finishing or jointing profiles in satin silver anodised aluminium
- Silicone joints
- Welding joints

NEW

Find out more about technical solutions at the end of the guide.

To find the colours available for each product, please see the summary table for the range at the end of this Guide.



DECOFRES - PROTECTION AND DECORATIVE FRESCOES



▶ ALL PUBLIC CONTEMPORARY

Applications


The contemporary Decofresc decorative frescoes provides an attractive setting in public buildings. They bring a touch of elegance and customization while protecting walls and they meet hygiene and impact resistance requirements.



Wave



Cloud

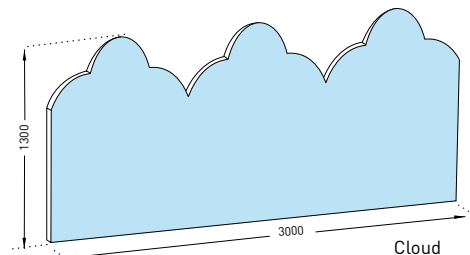

▶ EARLY CHILDHOOD

Applications

The early childhood Decofresc decorative frescoes are especially designed to brighten up and durably protect walls in establishments who hope to create an attractive, welcoming atmosphere that stimulates children's imagination. They meet the constraints linked to the early childhood: hygiene and impact resistance.




Altitude theme (4 pictures)



Savannah theme (4 pictures)



Maritime theme (4 pictures)

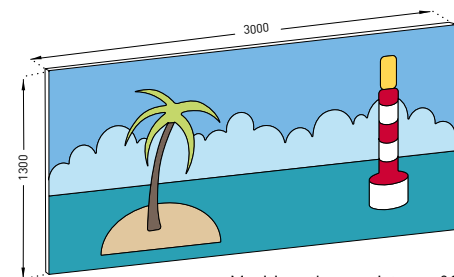

Maritime theme picture n°1

Description

- Model: All public contemporary or Early childhood Decofresc decorative fresco
- Standard panel dimensions: 3 m x 1.30 m indivisible
- Thickness : 2 mm
- Material : Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue. Joints between panels are made using silicone joints or PVC weld joints. Colour matched to the range
- Colours: 31 standard for all public contemporary and 3 themes each with 4 pictures (fixed colours) for Early childhood decorative frescoes

Specification

- Description: Wall protection and decoration panel (Cloud or Wave Decofresc - All public contemporary - or Savannah, Maritime, Altitude Decofresc - Early childhood - as manufactured by Gerflor) from rigid and antibacterial PVC achieving Bs2d0 fire rating with solid colour and textured surface.

3 m long, 1.30 m wide (indivisible), 2 mm thick.

No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: selected by architects from manufacturer's standard range
- Installation method: glue as per manufacturer's instructions.

Specification and technical drawings can be downloaded from our website www.gerflor.com

Find out more about technical solutions at the end of the guide.

To find the colours available for each product, please see the summary table for the range at the end of this Guide.

DECOPRINT



PROTECTION PANEL WITH CUSTOMISED DIGITAL PRINTING

Applications

The Decoprint printed panel is SPM's original solution combining wall protection and customised decoration.

We custom-build your protection panel, using digital printing to place your image (photograph, drawing, logo, text, etc.) on the back of the panel, in the requested size. It is also possible to link images to provide a continuous image. This is the ideal protection to enhance a touch of elegance and originality in buildings looking for aesthetic or signage solutions to cover walls in form.

The Decoprint panel creates a welcoming environment while guaranteeing durable and optimal protection and meets the hygiene and impact resistance requirements necessary in buildings that are open to the public.

Description


- Model: Decoprint protection panel with digital printing
- Height: made-to-measure (maximum 1.20 m)
- Width: made-to-measure (maximum 2.90 m)
- Thickness: 2 mm
- Material: Translucent antibacterial and Bs2d0 fire-rated PVC with image printed on the back
- Surface: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue. Joints between panels are made using silicone joints or PVC weld joints. Colour matched to the range
- Colours: translucent for customisation

Specification


- Description: protection panel with customised digital printing (Decoprint as manufactured by Gerflor) from translucent antibacterial PVC achieving Bs2d0 fire rating with images printed on the back. The surface is lightly textured. Its maximum height is 1.20 m and its maximum length is 2.90 m and 2 mm thick.

No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.




- Colours: customised and selected by architect's
- Installation: glue as per manufacturer's instructions.



Specification and technical drawings can be downloaded from our website www.gerflor.com

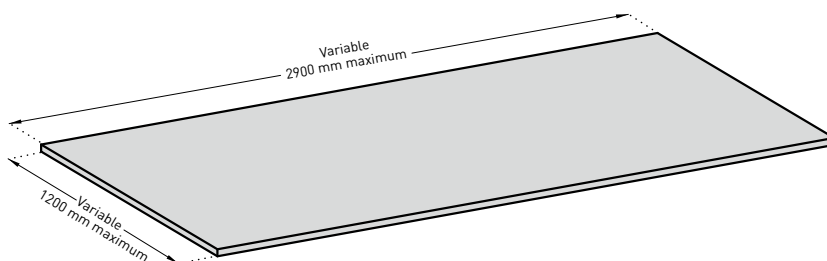

▶ SPM CAN CUSTOMISE YOUR PROTECTION PANELS

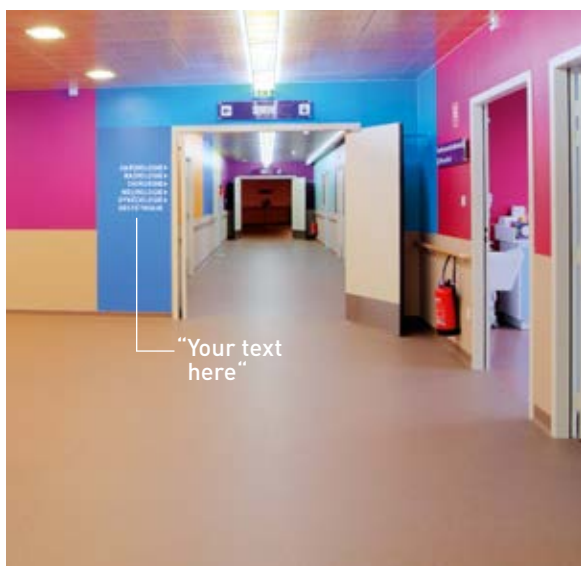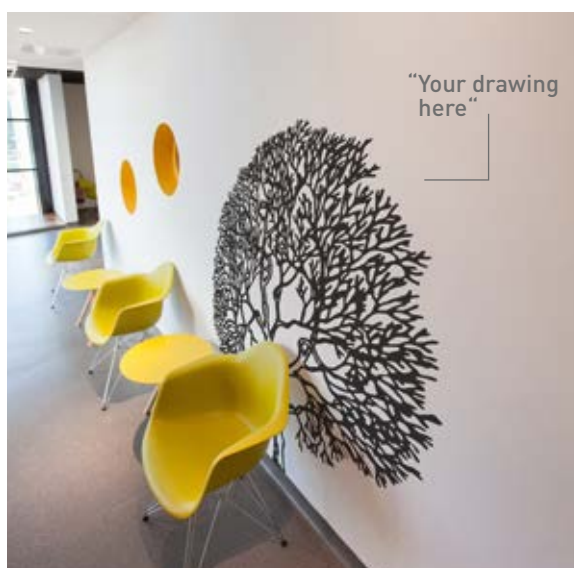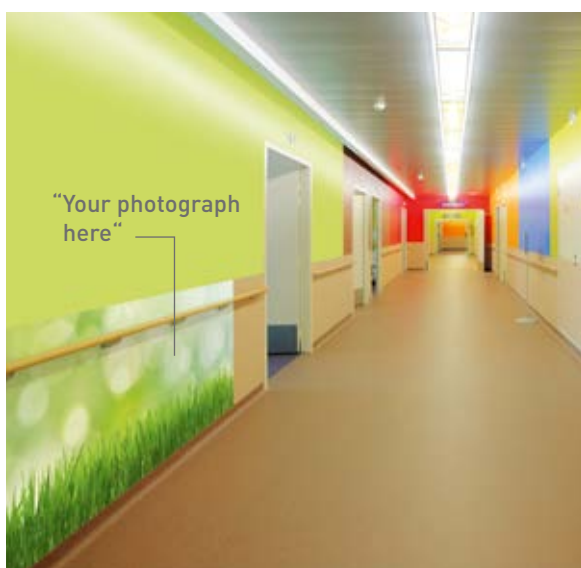

Call your local service for answers to all your questions and to create a customised panel.

The reproduced images or photos must be free of copyright – if they are not, the reproduction rights are payable by the user, who has full responsibility.

Find out more about technical solutions at the end of the guide.



DECOCARE



HAND HYGIENE PROTECTION PANEL

Applications

Decocare hand hygiene panels combine a public health message with effective protection of the walls above sinks.

The educational pictograms are easy to understand and encourage good hand hygiene in order to limit the spread of hand-borne germs.

The panels provide solid and decorative wall protection and can be installed in all wet rooms to spell out the hand washing routine. They can also be customised with your logo or other text.

Description


- Model: Decocare hand hygiene protection panel
- Dimensions:
Classic: 600 x 400 mm
Fountain: 600 x 600 mm
Made-to-measure
- Thickness: 2 mm
- Material: Translucent antibacterial Bs2d0 fire-rated PVC with image printed on the back
- Surface: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue. Joints are made using silicone joints or PVC weld joints. Colour matched to the range
- Colours:
2 standard models
Option: customisation

Specification


- Description: Hand hygiene protection panel, classic or fountain shape (Decocare as manufactured by Gerflor) from translucent antibacterial PVC achieving Bs2d0 fire rating with image printed on the back. Its surface is lightly textured. Its length is 600 mm, its height is 400 mm (classic) or 600 mm (fountain) and its thickness is 2 mm.

No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.


- Colour: selected by architects from manufacturer's standard range. Customized on request.
- Installation method: Universal mastic-glue, as per manufacturer's instructions.



Specification and technical drawings can be downloaded from our website www.gerflor.com

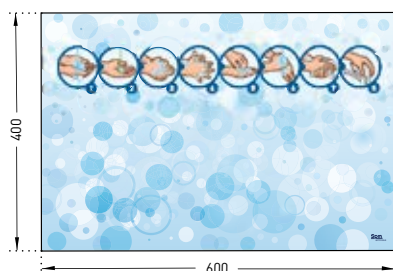

Decocare Classic

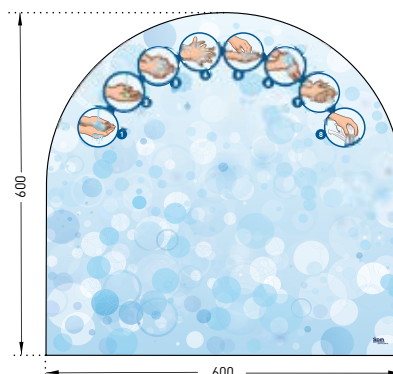

Decocare Fountain




DECOKID



PROTECTION AND EDUCATIONAL PANEL

Applications

Gerflor's educational panels Decokid bring to life a number of messages in bright colours, aimed at children, whilst still providing robust wall protection. Putting across educational principles to small children by means of immediately understandable images within their school environment is an effective educational aid. Hygiene, the environment, safety, etc, Gerflor's educational panels illustrate real situations that relate to children's daily lives.

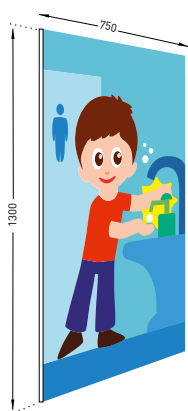

Description

- Model: Decokid protection and Educational panel
- Standard panel dimensions: 0.75 m x 1.30 m
- Thickness: 2 mm
- Material: Translucent antibacterial and Bs2d0 fire-rated PVC, with a visual printed on the back.
- Surface finish: Lightly textured
- Fixing: Adhesive bonding with Gerflor universal mastic-glue
- Colours: 11 designs available (in predefined colours)

Specification

- Description: Wall protection and educational panel (Decokid educational panel as manufactured by Gerflor) from rigid, antibacterial and translucent PVC achieving Bs2d0 fire rating with a visual printed on the back. The surface is lightly textured. Its width is 0.75 m, height 1.3 m and thickness 2 mm. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range
- Installation method: Universal mastic-glue, as per manufacturer's instructions

Specification and technical drawings can be downloaded from our website www.gerflor.com



1. I cross the road at a pedestrian crossing.



2. Early to bed, early to rise.



3. 30 mph, that's the urban speed limit.



4. I always say, 'Hello'.



5. I always put my rubbish in the bins provided.



6. I always wash my hands before eating.



7. I always wear my seat belt in the car.



8. I take breaks from my video games.



9. I always wash my hands after using the toilets.



10. No pushing.



11. I never leave the tap running.


Educational panels: a unique and original concept

- Matched to all existing colour schemes
- Extends a building's working life
- Resists damage from even the harshest cleaning materials
- Easy to install
- These panels match the Decochoc protection and covering panels (available in 31 colours) for optimal protection

Find out more about technical solutions at the end of the guide.



Welding joints
31 colours



THERMO-WELDING

▶ HOT WELDED JOINTS

Applications

SPM Decochoc and Decoclean panels are made of antibacterial PVC. They are easy to clean and can be installed:

- from floor to ceiling with welded joints
- in right or curved corners, whatever the degrees or the radius
- above the skirting of PVC floor coverings.

For a reliable waterproof seal, SPM has a range of welding joints matched to the colours of SPM profiles, allowing you to hot weld one panel to another.

SPM and GERFLOR also provide a global solution for absolute water tightness and reliable junction:


hot welded joints between the skirting of the floor covering and the wall panel.

This system is optimised to work with the exclusive GERFLOR Corner systems, and is particularly recommended for operating rooms and other rooms requiring a high level of hygiene.

Description

- Model: Gerflor welding joint
- Diameter: 4 mm
- Length: 100 m roll
- Material: Flexible PVC
- Fixing: hot welded with welding machine
- Colours: 31 standard





Decoclean
5 colours



DECOCLEAN



▶ SMOOTH PROTECTION PANEL

Applications

This wall protection has been especially developed for areas exposed to a high risk of infection in order to help in the fight against in-hospital illnesses and to reduce bacterial proliferation. It is recommended for:

- Operating theatres
- Intensive care, transplant and serious burns wards
- Neonatology
- Central sterilisation
- All high infection risk areas, including those at Level 4 on the Pasteur scale.

Description


- Model: Decoclean smooth protection panel
- Standard panel dimensions: 3 m x 1.30 m
- Custom options: cutting to size, bendings, chamfers
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: smooth
- Fixing: Adhesive bonding with Gerflor acrylic glue. Joints between panels are made using silicone joints or PVC weld joints, colour matched to the range
- Colours: 5 standard

Specification

- Description: Smooth protection panel (such as Gerflor's Decoclean) in rigid and antibacterial PVC, Bs2d0 fire-rated and solid-coloured. Its surface is smooth. Its length is 3 m, width 1.3 m and thickness 2 mm.
- No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range
- Installation method: Glue as per manufacturer's instructions.



Specification and technical drawings can be downloaded from our website www.gerflor.com

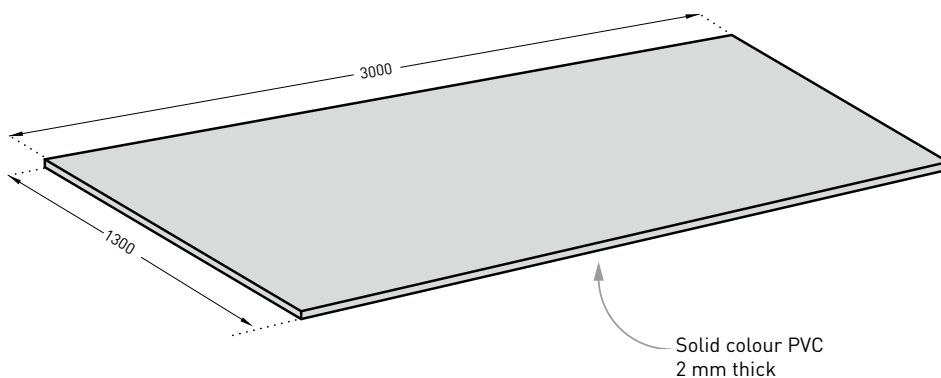


For an impeccable finish:

- Silicone joints colour coordinated with the panels
- Welding joints

Find out more about technical solutions at the end of the guide.

To find the colours available for each product, please see the summary table for the range at the end of this Guide.

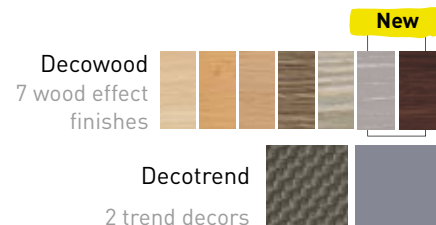

DECOWOOD AND DECOTREND



▶ WOOD EFFECT DECORATIVE PROTECTION PANEL

Applications

This panel has been designed to protect from impact and abrasion whilst offering the warmth and style of a wood effect finish.

It is particularly adapted to retirements homes, clinics, schools, hotels...

Description


- Model: Decowood decorative protection panel
- Standard panel dimensions: 3 m x 1.30 m
- Thickness: 2 mm
- Material: wood effect Bs2d0 fire-rated PVC
- Surface finishing: wood effect
- Fixing: Adhesive bonding with Gerflor acrylic glue. Joints between panels are made using silicone joints or PVC weld joints colour matched to the range.
- Colours: 7 standard wood effect finishes

Specification

- Description: wood effect decorative protection panel (Decowood as manufactured by Gerflor). Impact and scratch resistant from rigid wood effect PVC Bs2d0 fire-rated. Its length is 3 m, width 1.30 m and thickness 2 mm. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colours: selected by architects from manufacturer's standard range.

- Installation method: Glue as per manufacturer's instructions.

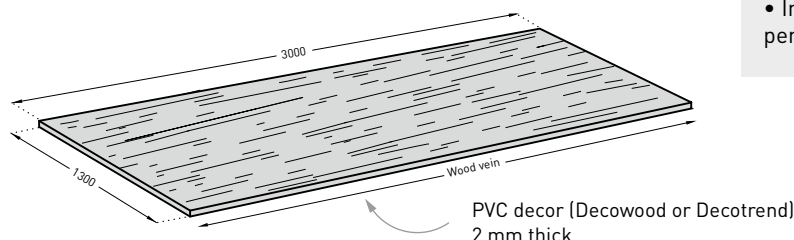

▶ TREND EFFECT DECORATIVE PROTECTION PANEL

Applications

This range of panels uplifts and highlights interiors in an original manner. Their high degree of strength is useful for covering walls of bedrooms, reception areas and dining areas in hotels, retirement homes, schools or any form of establishment open to the public.

Description


- Model: Decotrend decorative protection panel (Composite or Brushed Aluminium)
- Standard panel dimensions: 3 m x 1.30 m
- Thickness: 2 mm
- Material: trend decor Bs2d0 fire-rated PVC
- Surface finish: metalized effect
- Fixing: Adhesive bonding with Gerflor acrylic glue. Joints between panels are made using silicone joints or PVC weld joints colour matched to the range.
- Colours: 2 standard decors

Specification

- Description: trend effect decorative protection panel (Decotrend as manufactured by Gerflor - Composite or Brushed Aluminium). Impact and scratch resistant from rigid metalized effect PVC Bs2d0 fire-rated. Its length is 3 m, width 1.3 m and thickness 2 mm. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: selected by architects from manufacturer's standard range.


- Installation method: Glue as per manufacturer's instructions.




Specification can be downloaded from our website www.gerflor.com

Find out more about technical solutions at the end of the guide.

To find the colours available for each product, please see the summary table for the range at the end of this Guide.

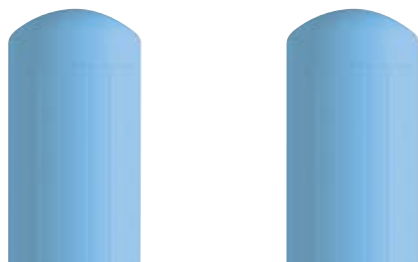

Bedkit
28 colours

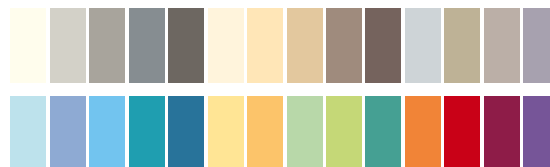

Plac'Inox



BEDKIT



VERTICAL BED HEAD PROTECTION

Applications


This protection has been especially designed to protect walls from bed-heads impacts in all health buildings.

Description

- Model: Bedkit vertical bed-head protection
- Height: 600 mm
- Thickness: 30 mm
- Projection: variable from 146 to 336 mm
- Material: 3 mm antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: smooth with decorative grooves
- Fixing: of the aluminium plate with 8 metal expansion plugs
- Colours: 28 standard

Specification

- Description: bed head protection comprising 2 vertical wall protection rails, on aluminium plate and 2 aluminium tubes (Bedkit as manufactured by Gerflor). Bs2d0 fire-rated, antibacterial and solid colour, the PVC rails provide a smooth surface with decorative grooves and are fixed on a 3 mm thick and 600 mm high aluminium plate. These parts fit together on 2 coated aluminium tubes adjustable from 110 to 300 mm, fixed by a tightening screw and fitted to the wall with a 3 mm thick aluminium plate. Overall projection is adjustable from 146 mm to 336 mm. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: fixing the aluminium plate with 8 metal expansion plugs.

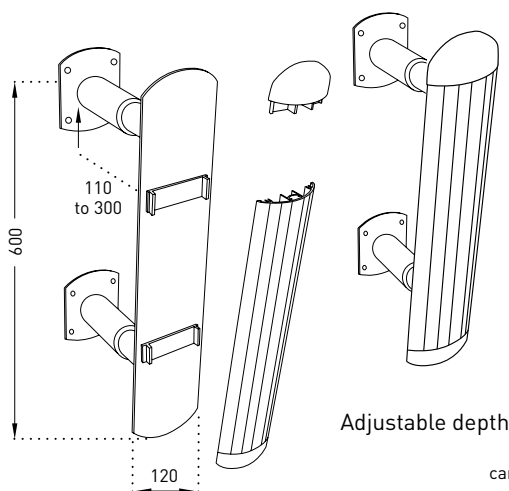

Adjustable depth

Specification and drawings can be downloaded from our website www.gerflor.com



PLAC'INOX



BRUSHED STAINLESS STEEL PROTECTION PLATE

Applications


Plac'Inox protection plates reinforce those areas subject to impacts and are approved for food-handling areas. Suitable for use in areas of heavy use or damp places, they are particularly useful in the food and pharmaceutical industries as well as in healthcare establishments, main kitchens, etc.

Description

- Model: Plac'Inox protection plate
- Height: as required (1.25 m maximum)
- Length: as required (2.50 m maximum)
- Thickness: 10/10th mm
- Material: Stainless steel (approved for food handling areas)
- Fixing: Adhesive bonding with Gerflor mastic-glue
- Finish: Brushed metal.

Specification


- Description: Protection plate (Plac'Inox as manufactured by Gerflor) in 10/10th mm brushed stainless steel approved for food handling areas. Its maximum length is 2.50 m and its maximum height 1.25 m.
- Finish: Brushed metal
- Installation method: glue as per manufacturer's instructions.

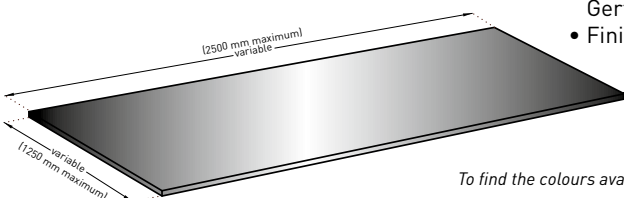





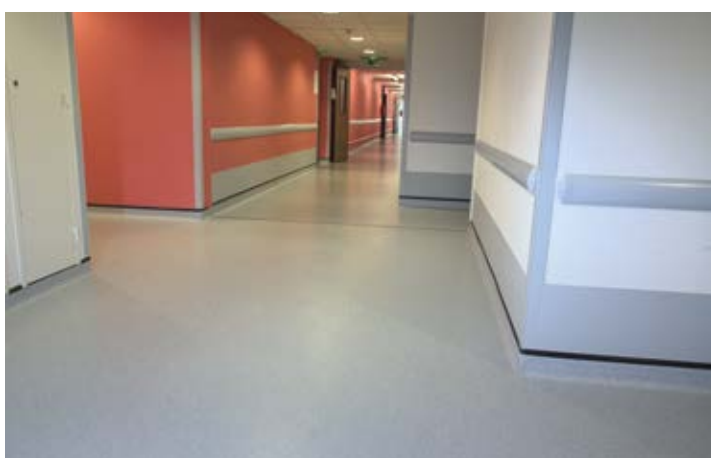

To find the colours available for each product, please see the summary table for the range at the end of this Guide.



SPM CORNER PROTECTORS



Corners are particularly prone to damage so they need to be well protected. Gerflor has developed a complete range of carefully designed corner protectors which combat wear and provide effective, safe protection. The corner protectors are either adhesive, for corners exposed to light impact, or on aluminium core, for corners in areas with intense activity, whether 90° or not. All have the same properties: they resist impact and the effects of cleaning and disinfectant products, and have a Bs2d0 fire rating.

	Code	Description	Material	Colour range
CAPCORN		90° round corner protector on aluminium core	PVC + aluminium	5 colours
CORNEA		90° corner protector with contrast strip on aluminium core	PVC + aluminium	28 colours + 10 Two-colour combinations
CORNEAFLEX		135° and variable angle corner protectors on aluminium core	PVC + aluminium	5 colours
PROTECTA 2		70 to 135° adhesive corner protector with contrast strip	PVC	28 colours + 10 Two-colour combinations
PROFILA		90° adhesive finishing corner protector	PVC	28 colours
PROFIL'INOX		90° adhesive corner protector	Stainless steel	Brushed finish




CAPCORN p.48
90° round corner protector
on aluminium core



PROFIL'INOX p.51
Adhesive 90° corner protectors
in brushed stainless steel



CORNEA p.49
90° corner protector with contrast strip
on aluminium core



CORNEAFLEX p.50
135° and variable angle corner
protectors on aluminium core



**PROTECTA 2,
PROFILA
p.52-53**
90° and variable angle
adhesive corner protectors





Capcorn
5 colours*



*and 23 colours on request with
a minimum order quantity

CAPCORN



▶ 90° ROUND CORNER PROTECTOR ON ALUMINIUM CORE

Applications

Combining elegance and strength, this round corner protector is ideally suited for protecting and decorating 90° corners. Recommended for use in corridors and areas exposed to heavy, frequent impact in hotels, restaurants, schools, offices, shops, hospitals, clinics, retirement homes.

Description


- Model: Capcorn round corner protector on aluminium core
- Angle: 90°
- Wing width: 45 mm (internal measurement)
- Thickness: 2.5 mm
- Length: 1.30 m, 2.00 m or 4.00 m
- Material: antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: smooth
- Fixing system: continuous pre-drilled aluminium core
- Colours: 5 standard

Specification


• Description: 90° round corner protector mounted on aluminium core (Capcorn as manufactured by Gerflor) comprising 2.5 mm thick smooth and antibacterial PVC profile achieving Bs2d0 fire rating with solid colour. Wings are 45 mm wide (internal measurement) and snap-fix to a continuous pre-drilled aluminium core. The corner protector is finished with a smooth PVC endcap. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

• Colour: selected by architects from manufacturer's standard range.


• Installation method: snap-fixes to continuous pre-drilled aluminium core screwed to wall.

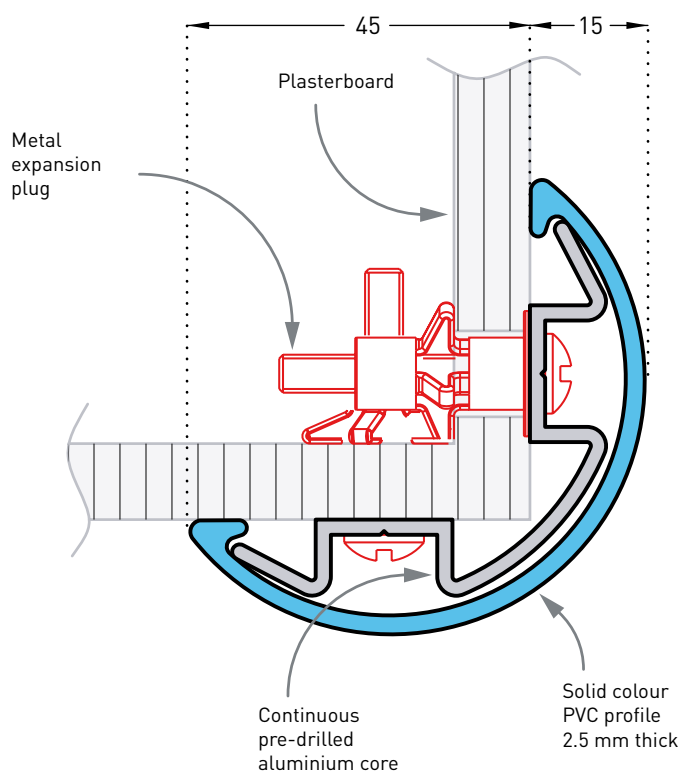

Specification and technical drawings can be downloaded from our website www.gerflor.com




Solid colour smooth PVC endcap




Continuous pre-drilled aluminium core

Solid colour PVC profile 2.5 mm thick

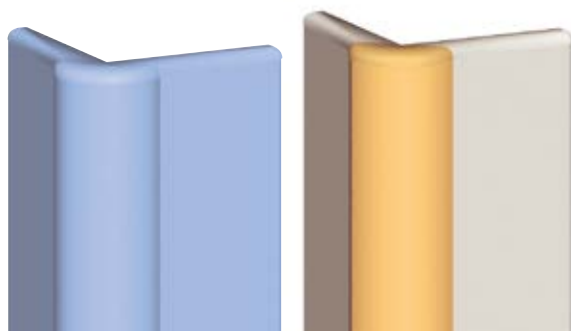

Cornea
28 colours



Cornea
10 two-colour combinations



CORNEA



▶ 90° CORNER PROTECTOR ON ALUMINIUM CORE

Applications

Efficient protection for 90° angles exposed to heavy impact from trolleys and carts. A unique rounded spine makes corners harmless. Recommended for corridors and entrances to hospitals, clinics, laboratories, kitchens, schools, supermarkets.

Description

- Model: Cornea corner protector with contrast strip on aluminium core
- Angle: 90°
- Wing width: 60 mm (internal measurement)
- Thickness: 2.5 mm
- Length: 1.30 m, 2.00 m or 4.00 m
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: smooth
- Fixing system: continuous pre-drilled aluminium core
- Colours:
 - one-colour: 28 standard
 - two-colour: 10 standard

Specification


• Description: 90° corner protector with contrast strip on aluminium core (Cornea as manufactured by Gerflor) comprising smooth and antibacterial 2.5 mm thick PVC profile achieving Bs2d0 fire rating with solid colour. Wings are 60 mm wide (internal measurement) and snap-fix to continuous pre-drilled aluminium core. The central rounded bead forms a decorative and harmless contrast strip. Smooth PVC endcaps are provided for ends. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

• Colour: selected by architects from manufacturer's standard range.


• Installation method: snap-fixes to continuous pre-drilled aluminium core screwed to wall.



Specification and technical drawings can be downloaded from our website www.gerflor.com

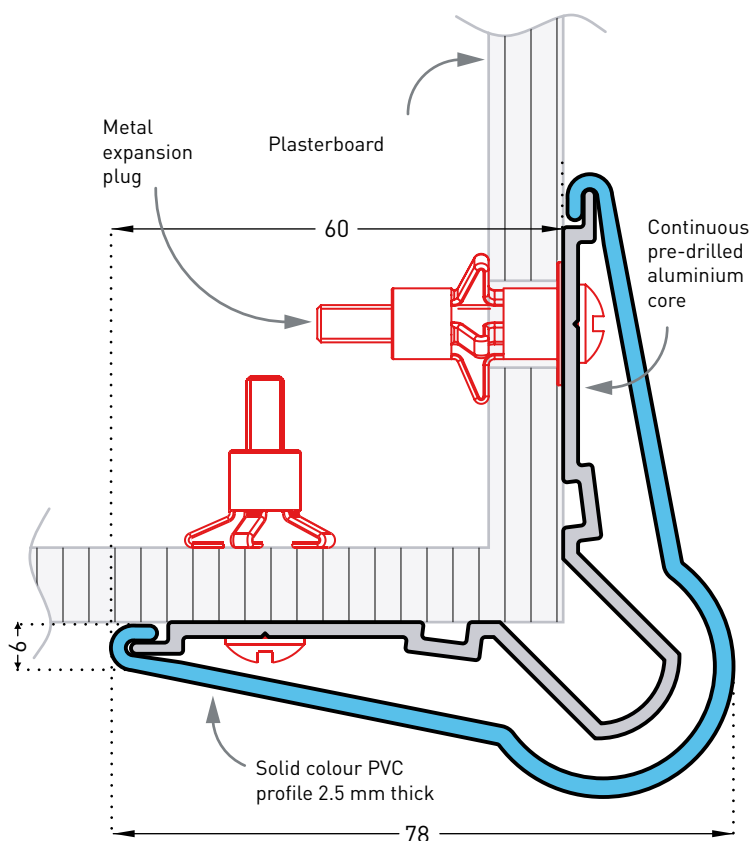


Solid colour smooth PVC endcap



Continuous pre-drilled aluminium core

Solid colour PVC profile 2.5 mm thick

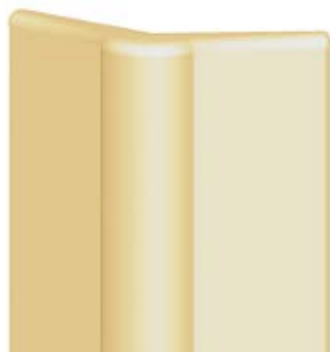

Corneaflex
5 colours*



*and 23 colours on request with
a minimum order quantity

CORNEAFLEX



▶ 135° AND VARIABLE ANGLE CORNER PROTECTOR ON ALUMINIUM CORE

Applications


High-performance protection for corners: 135° or variable angles. Designed with an impact-resistant flexible spine and supple PVC reinforcement beads, this product makes corners safe and protects them against heavy traffic. For use in corridors and entrances to kitchens, laboratories, hospitals, clinics and schools.

Description


- Model: Corneaflex corner protector with flexible contrast strip on aluminium core
- Angle: 135° or variable angles
- Wing width: 65 mm (internal measurement)
- Length: 1.30 m, 2.00 m or 4.00 m (135°), 4.00 m (variable angle)
- Material: Antibacterial and solid colour, 2.5 mm thick rigid PVC wings achieving Bs2d0 fire rating and a 3.5 mm thick flexible contrast strip
- Surface finish: smooth
- Fixing system: continuous pre-drilled aluminium core for 135° angle. The core is in two parts for variable angles
- Colours: 5 standard

Specification

- Description: corner protector with flexible contrast strip on aluminium core (Corneaflex as manufactured by Gerflor) comprising smooth and antibacterial PVC profile achieving Bs2d0 fire rating with solid colour. PVC profile snap-fixes to a continuous pre-drilled aluminium core. Wings are 2.5 mm to 3.5 mm thick, 65 mm wide (internal measurement) and open at 135° angle, or variable angles. Rounded flexible central contrast strip forms a decorative, highly effective cushion thanks to two internal flexible PVC reinforcement beads. Smooth PVC end caps are provided for 135° model. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: snap-fixes to aluminium core screwed to wall.




Specification can be downloaded
from our website
www.gerflor.com

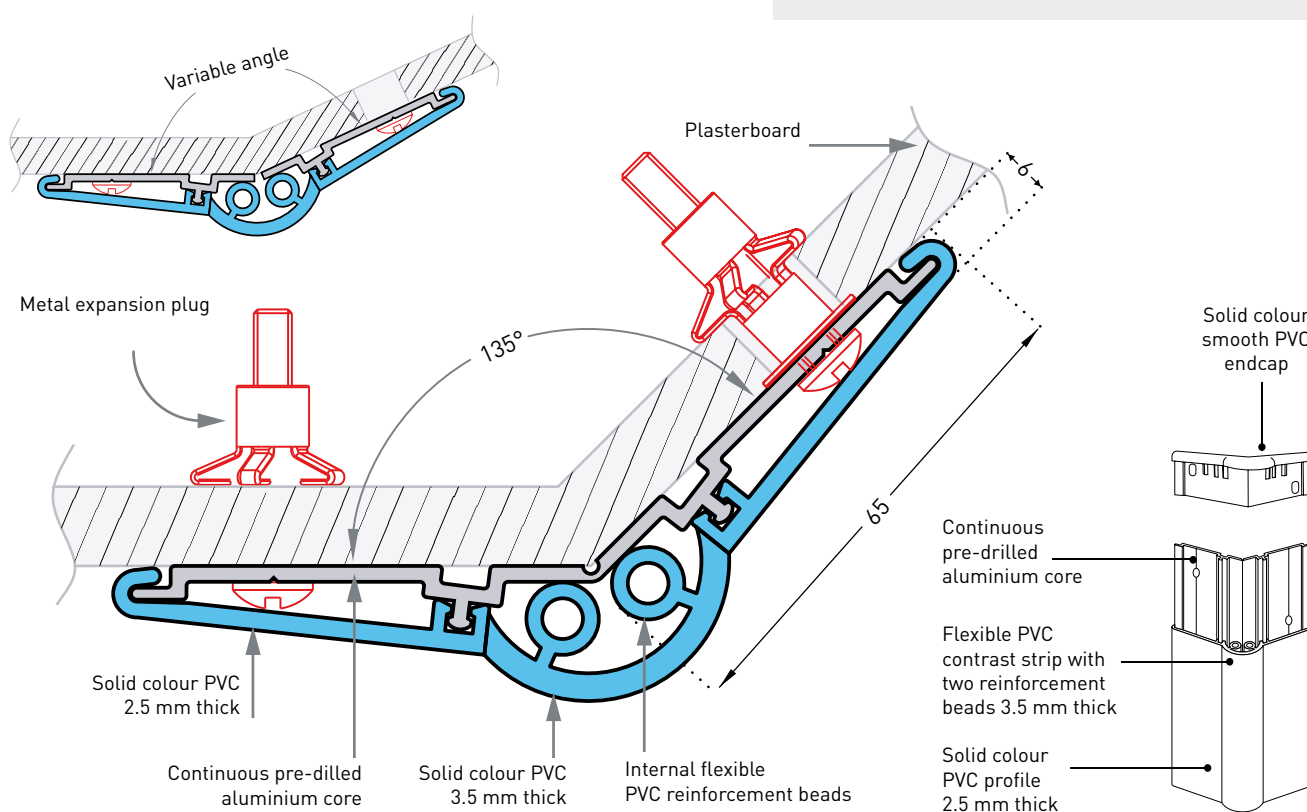



Profil'Inox
Brushed finish



PROFIL'INOX 50 AND 30



▶ 90° ADHESIVE CORNER PROTECTORS IN BRUSHED STAINLESS STEEL

Applications


Profil'Inox protect 90° corners exposed to impacts. They are instantly recognisable by their rounded spine and lightly chamfered sides. They are approved for use in food-handling areas. Ideally suited for heavily used or damp areas, they are particularly useful in the food and pharmaceutical industries as well as in healthcare establishments, main kitchens, etc.

Description



- Model: Profil'Inox 50 or 30
- Adhesive corner protector
- Angle: 90°
- Wing width: 50 or 30 mm
- Thickness: 10/10th mm
- Length: 2.50 m
- Material: Stainless steel (approved for food-handling areas)
- Fixing: Adhesive foam strips reinforced with Gerflor universal mastic glue
- Finish: Brushed metal


Specification

- Description: 90° adhesive corner protector with 50 mm wings (such as Gerflor's Profil'Inox 50), or with 30 mm wings (such as Gerflor's Profil'Inox 30), in 10/10th brushed stainless steel approved for food handling areas and provided with two adhesive foam tapes. Wings are lightly beveled.
- Finish: Brushed metal
- Installation method: Adhesive. Gerflor universal mastic glue is recommended for stronger fixing.

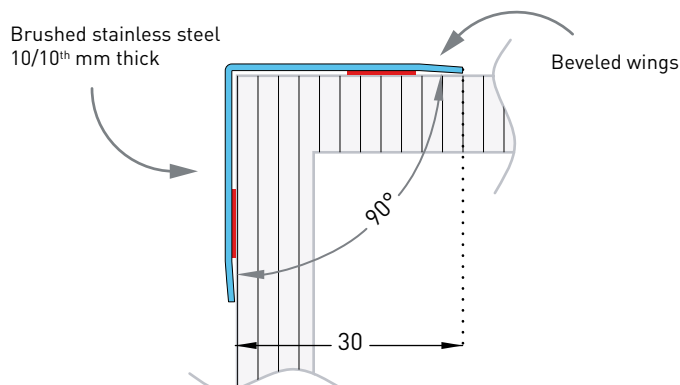


Specification can be downloaded from our website www.gerflor.com

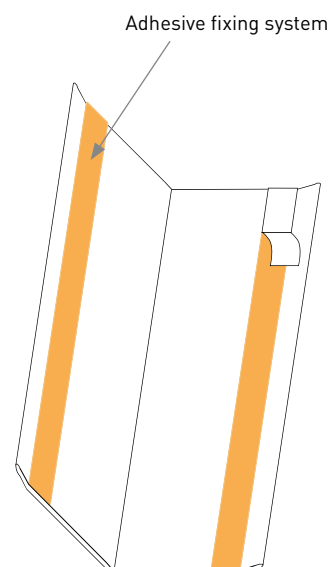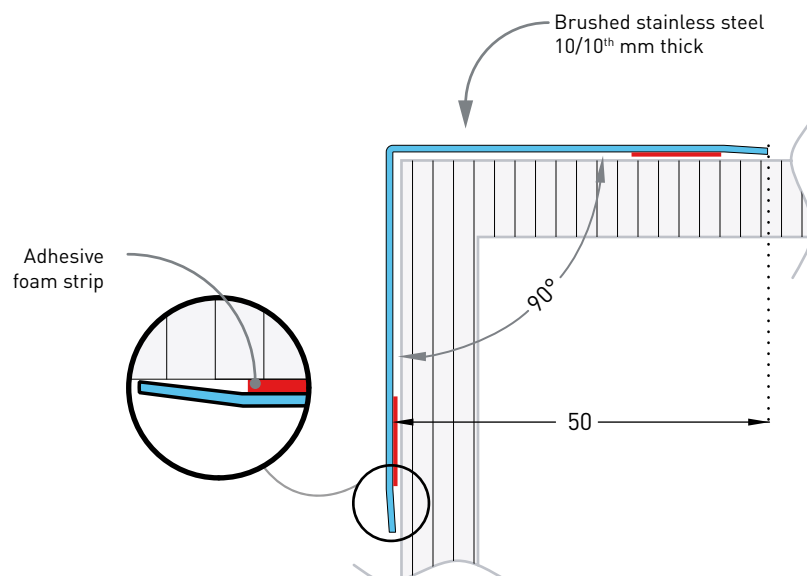



Protecta 2
28 colours



Protecta 2
10 two-colour combinations



PROTECTA 2



▶ VARIABLE ANGLE ADHESIVE CORNER PROTECTOR

Applications

Thanks to its rounded, reinforced spine, this product provides efficient, decorative and economical protection for all corners exposed to frequent impact. Available in 28 standard colours and 10 two-colour options, this model blends in with all interior decoration styles in public buildings.

Description


- Model: Protecta 2 adhesive corner protector with adhesive tapes
- Angle: from 70 to 135°
- Wing width: 60 mm
- Thickness: 2 mm
- Length: 1.30 m, 2.00 m or 4.00 m
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: Smooth
- Fixing: Adhesive foam strips reinforced with Gerflor universal mastic glue
- Colours: 28 standard and 10 two-colour combinations.


Specification

- Description: 60 mm wide wing (internal measurement), variable angle corner protector (from 70° to 135°) with flexible contrast strip (Protecta 2 as manufactured by Gerflor) comprising smooth and antibacterial PVC profile achieving Bs2d0 fire rating with solid colour. 2 mm thick wing. Central rounded bead forms a decorative and harmless contrast strip. It is provided with 2 strips of foam adhesive tape for fixing. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: Adhesive. Gerflor universal mastic-glue is recommended for stronger fixing.




Specification and technical drawings can be downloaded from our website www.gerflor.com

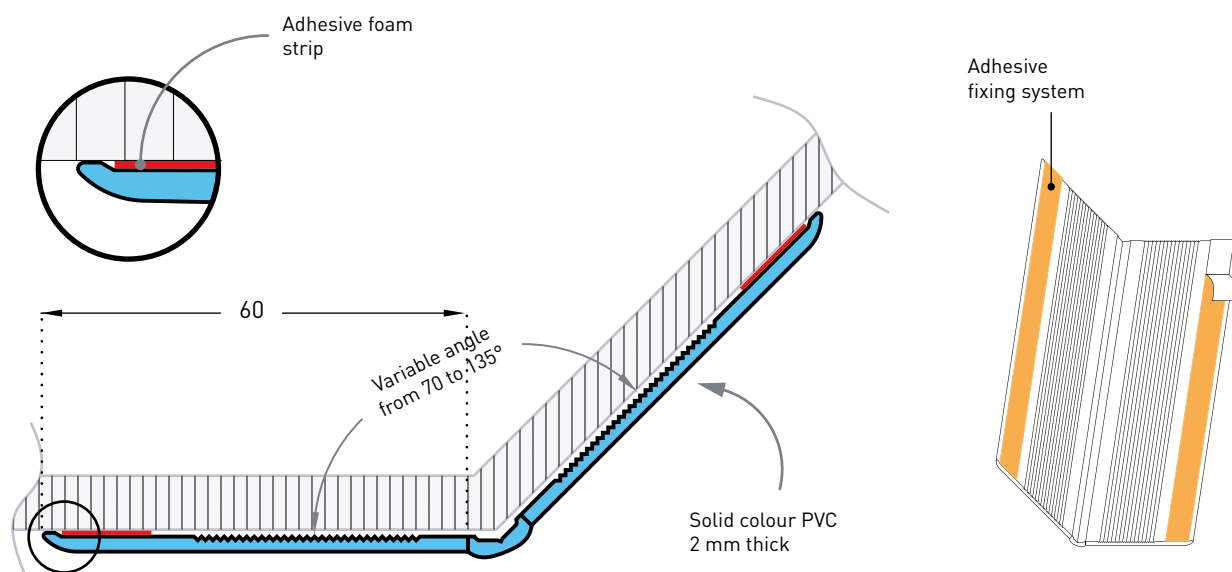

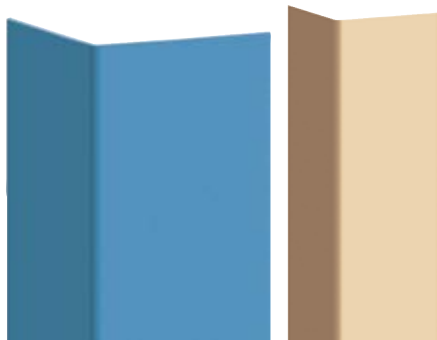

Profila 30 / Profila 50
28 colours



PROFILA 50 & 30



▶ 90° ADHESIVE CORNER PROTECTOR

Applications

These corner protectors blend in seamlessly with all interiors and protect corners from light impacts.

Profila 30 can also protect some door frames.

Description

- Model: Profila 50 & 30 adhesive corner protectors with adhesive tapes
- Angle: 90°
- Wing width: 50 mm Profila 50
30 mm Profila 30
- Thickness: 2 mm
- Length: 1.30 m, 2.00 m or 4.00 m
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: Smooth
- Fixing: Adhesive foam strips reinforced with Gerflor universal mastic glue
- Colours: 28 standard.

Specification


- Description: 50 mm or 30 mm wide wings, 90° corner protector (Profila 50 or 30 as manufactured by Gerflor) comprising smooth and antibacterial PVC profile achieving Bs2d0 fire rating with solid colour. 2 mm thick, wings are 50 mm or 30 mm wide (internal measurement). It is provided with 2 strips of foam adhesive tape for fixing. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: selected by architects from manufacturer's standard range.

- Installation method: Adhesive. Gerflor universal mastic-glue is recommended for stronger fixing.



Specification and technical drawings can be downloaded from our website www.gerflor.com

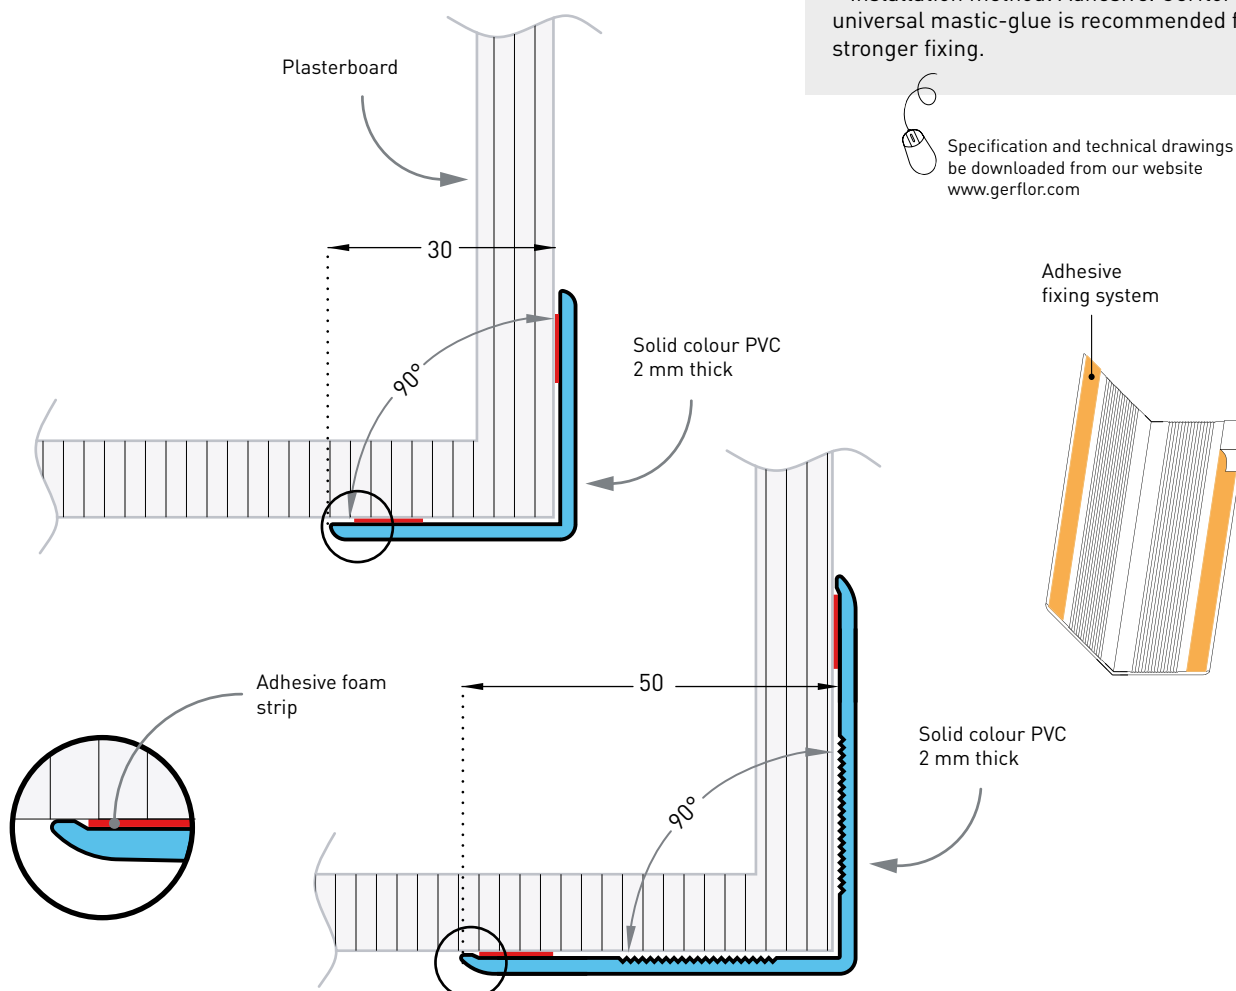



SPM DOOR PROTECTION



In medical and other public body establishments, doors are subjected to the harshest of tests: the facing and side edges are particularly exposed and prone to damage, and are knocked by trolleys, stretchers and other mobile equipment.

Gerflor has developed a range of protection panels and protective hand plates.

They can be cut to size, folded into L or U bends, and can be adapted to fit all types of woodwork.

It is essential to protect and you can also add a decorative touch with some of Gerflor's original designs.

	Code	Description	Material	Colour range
FOOT-HEIGHT DOOR		Contact 350 or 200 plates	PVC	15 or 31 colours
HALF-HEIGHT DOOR		Straight cut Decochoc panel	PVC	31 colours
		Plac'Inox protection plate	Stainless steel	Brushed finish
HALF-HEIGHT DECORATIVE DOOR		Decochoc panel with decorative cut outs	PVC	31 colours to combine
HANDPLATES		Decochoc panel with decorative cut outs	PVC	31 colours
INLAYED SIGNAGE		Decochoc panel 1/2 height door	PVC	31 colours for numerals 11 drawings Early childhood
EDGES AND FRAMES		Decochoc panel bends and thermoforming	PVC	31 colours




Colours are not contractually binding

FOOT-HEIGHT DOOR
p.56
Contact plates




HALF-HEIGHT DECORATIVE DOOR
p.58-59

Decochoc panel
with decorative cut outs
(one or two-colour)

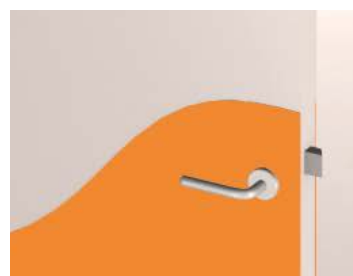


HALF HEIGHT DOOR
p.57
Straight cut
Decochoc panel

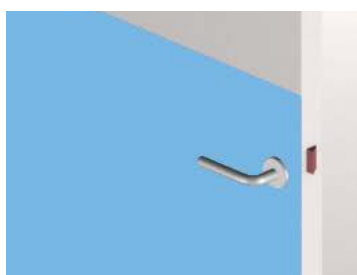

HANDPLATES
p.60

Decochoc panel
with decorative cut outs



PLAC'INOX
p.57
Stainless steel
protection plate




HALF-HEIGHT DOOR INLAYED SIGNAGE
p.61

Numerals and
early childhood



EDGES AND FRAMES
p.62-63
Decochoc panel
bends and thermoforming

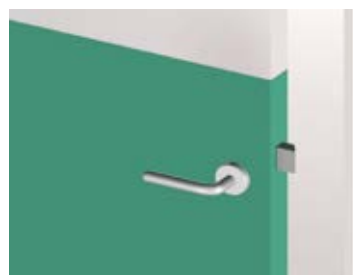




Contact 350
15 colours*



*and 13 colours on request with a minimum order quantity

Contact 200
28 colours




FOOT-HEIGHT DOOR PROTECTION



CONTACT PLATES

Recommended protection height: 200 mm or 350 mm.

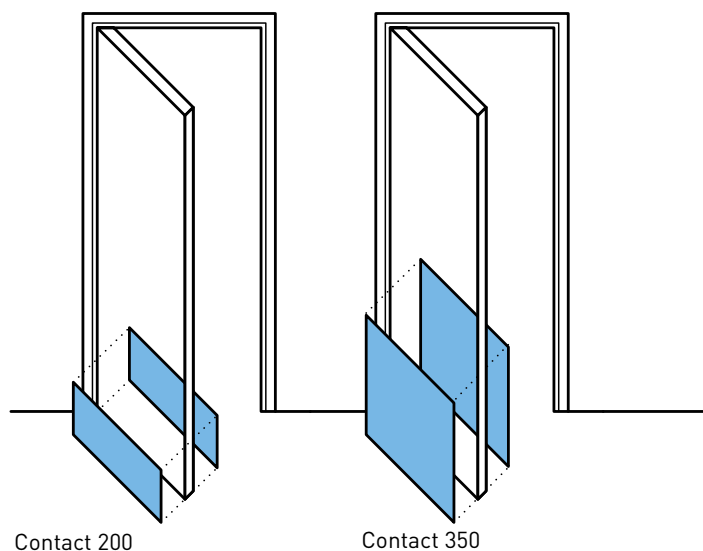

Description

- Model: Contact 350 and 200 adhesive protection plates
- Section depth: 350 or 200 mm
- Thickness: 2.5 mm
- Length: 4 m
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: Smooth with decorative grooves
- Fixing: Adhesive foam strips reinforced with Gerflor universal mastic glue
- Colours: 15 standard for Contact 350, 28 standard for Contact 200.

Specification

- Description: Adhesive protection plates (Contact 350 or 200 as manufactured by Gerflor) from smooth and antibacterial PVC with a depth of 350 or 200 mm, 2.5 mm thick. PVC profiles achieving Bs2d0 fire rating, feature solid colour and smooth surface finish with decorative grooves. Sections are delivered with 2 or 3 strips of adhesive foam for fixing.

No heavy metals are used in its manufacture and the calcium zinc thermal stabilization process is used.

- Colour: Selected by architects from manufacturer's standard range.
- Installation method: Adhesive. Gerflor universal mastic glue is recommended for stronger fixing.



Specification and drawings can be downloaded from our website www.gerflor.com

PLAC'INOX STAINLESS STEEL PROTECTION PLATE

Please refer to page 45.



HALF-HEIGHT DOOR PROTECTION



▶ STRAIGHT CUT DECOCHOC PANEL

Recommended protection height: from 800 mm to 1300 mm.

Applications

Protects and decorates doors in corridors and entrances to hospitals, clinics, retirement homes, schools, kitchens, restaurants, collective housing...

To avoid the handle and lock and facilitate installation, we recommend a protection height below either 900 mm or 1100 mm.


Description

- Model: Cut-to-size Decochoc panel according to requirements
- Standard panel dimensions: 3 m x 1,30 m
- Custom options: Bendings, thermoformings, chamfers
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface: Lightly textured
- Fixing: Adhesive bonding with Gerflor acrylic glue
- Colours: 31 standard.

Specification

- Description: Protection and covering panel (Decochoc as manufactured by Gerflor) from antibacterial PVC achieving Bs2d0 fire rating with solid colours. Surface is lightly textured, 2 mm thick. No heavy metals are used in its manufacture and the calcium zinc thermal stabilization process is used.
- Colours: As required from the manufacturer's range.
- Installation method: Glue as per manufacturer's instructions.


Specification can be downloaded from our website www.gerflor.com

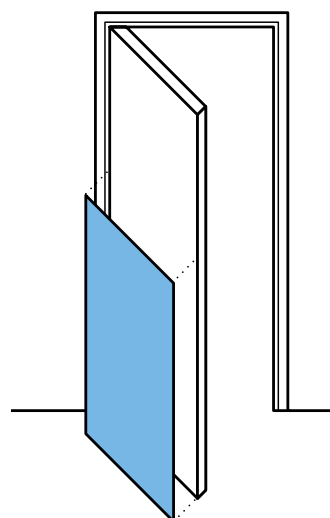

Door protection

▶ PLAC'INOX STAINLESS STEEL PROTECTION PLATE

Please refer to page 45.

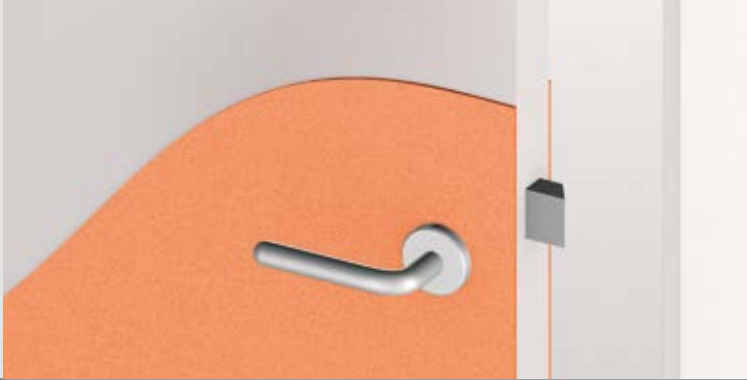

HALF-HEIGHT DECORATIVE DOOR PLATE



DECOCHOC PROTECTION AND COVERING PANEL WITH DECORATIVE CUT OUTS

One colour

Applications


These cut-outs provide half-height protection and decoration for doors. Ideal for use in corridors in public buildings: hospitals, restaurants, hotels... Shapes and colours make easier the location of different doors: rooms, staff rooms, technical premises, etc.

Description


- Description: 4 one-colour Decochoc standard masks
- Cut-to-size Decochoc panel according to requirements.
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour.
- Surface finish: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue
- Colours: 31 standard


Specification

- Description: half-height decorative one colour door protection (Iron, Wave, Mountain or Cubic masks as manufactured by Gerflor) from antibacterial PVC achieving Bs2d0 fire rating with solid colour. Lightly textured surface finish, 2 mm thick. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions.



Specification can be downloaded from our website
www.gerflor.com

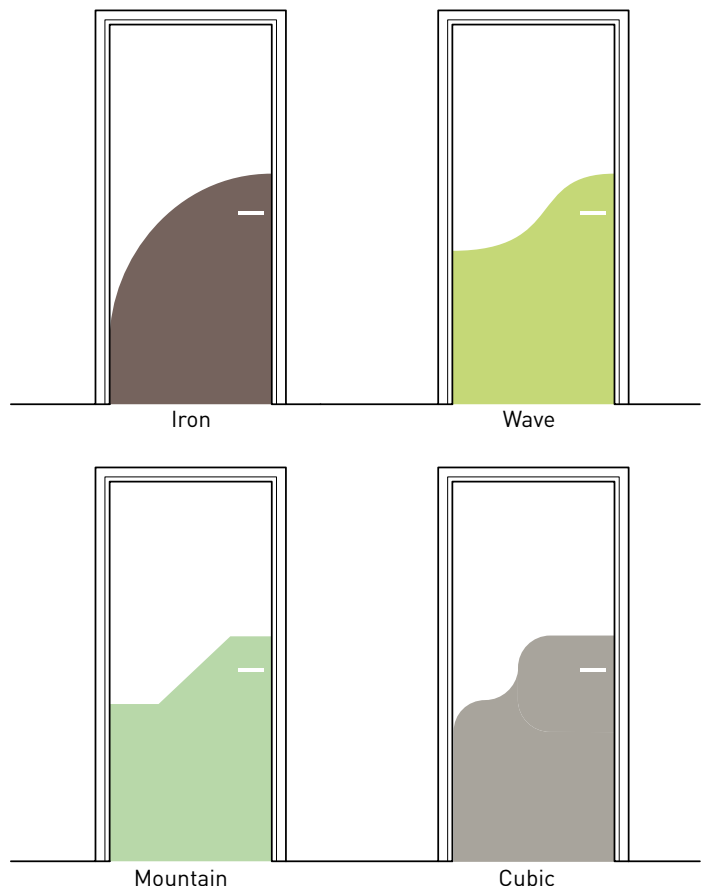

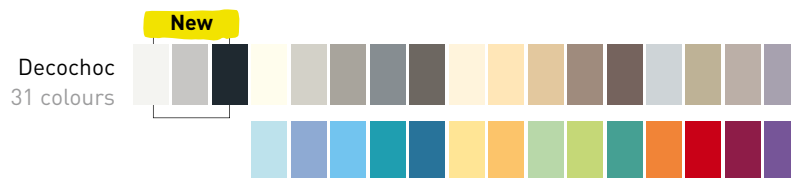

Two-colour

Applications

These half-door claddings protect and bring a touch of originality. This two-colour range provides visual help by using floor, department, service or section colour schemes, very useful in accessibility process.

Description


- Model: 5 two-colour Decochoc standard masks
- Height: 1200 mm
- Width: 930 or 1230 mm
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour.
- Surface finish: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue
- Colours: 31 standard to combine

Specification


- Description: half-height decorative two-colour door protection (Stratum, Cubic, Comma, Stairs, Rainbow masks as manufactured by Gerflor) from rigid and antibacterial PVC achieving Bs2d0 fire rating with solid colour and textured surface. 2 mm thick. The width is 930 or 1230 mm, height 1200 mm. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: selected by architect from manufacturer's standard range


- Installation method: glue as per manufacturer's instructions.

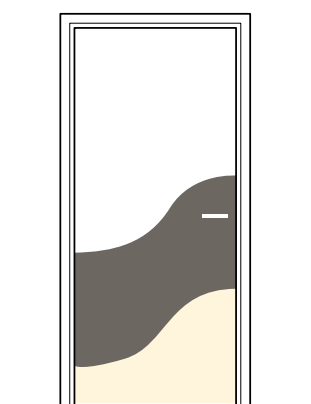


Stratum

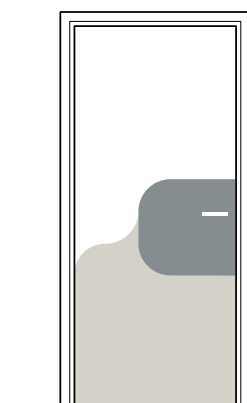


Cubic

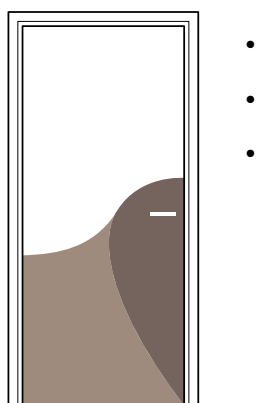

Comma

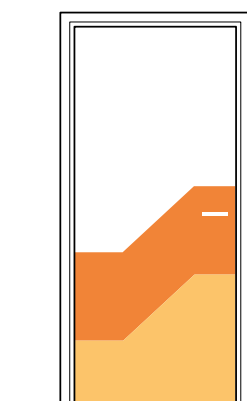


Stairs

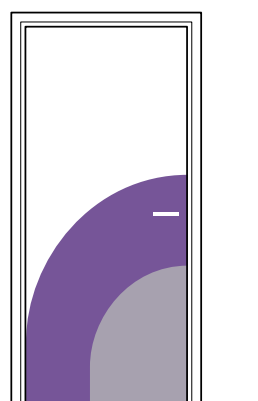

Rainbow




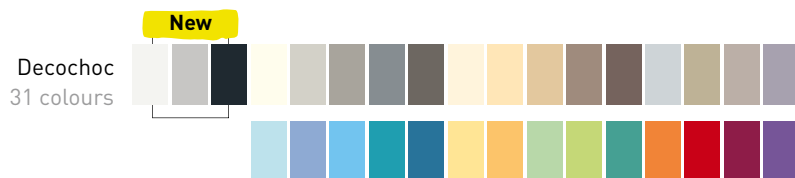

HANDPLATES



▶ DECOCHOC PROTECTION AND COVERING PANEL WITH DECORATIVE CUT OUTS

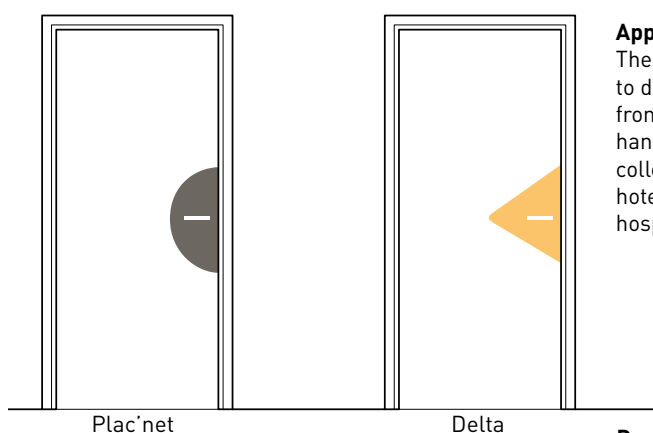

Plac'net

Delta

Applications

These original shapes are used to decorate and protect doors from wear and dirt around handles. Perfect for all collective institutions: schools, hotels, offices, restaurants, hospitals, retirement homes...

Specification


- Description: handplates (Nö, Glass, Wooden, Dan, Eclipse, Plac'net or Delta masks as manufactured by Gerflor) from antibacterial PVC achieving Bs2d0 fire rating with solid colour. Lightly textured surface finish, 2 mm thick. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: selected by architects from manufacturer's standard range.

- Installation method: adhesive or glue as per manufacturer's instructions


Description

- Model: 7 standard masks of handplates
- Cut-to-size Decochoc, panel according to requirements
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: Lightly textured
- Fixing: Adhesive or Gerflor acrylic glue
- Colours: 31 standard

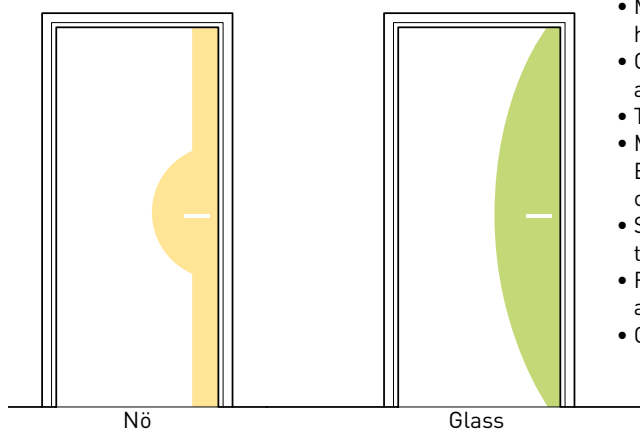

Nö


Glass

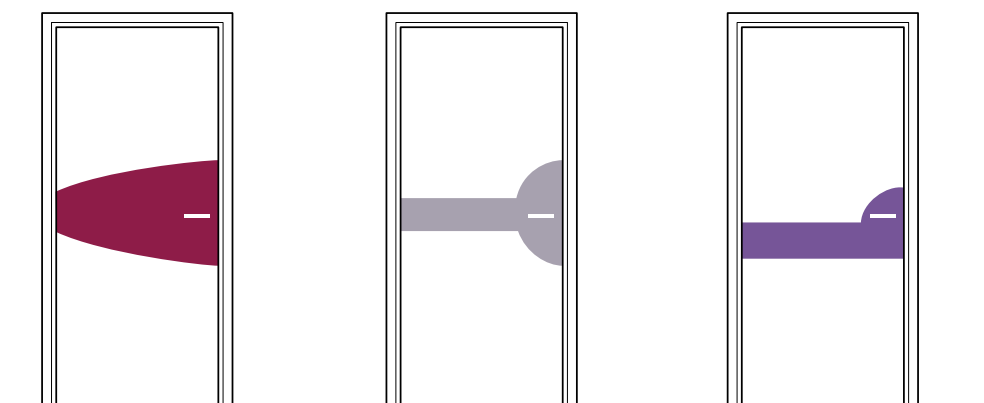

Wooden

Dan

Eclipse

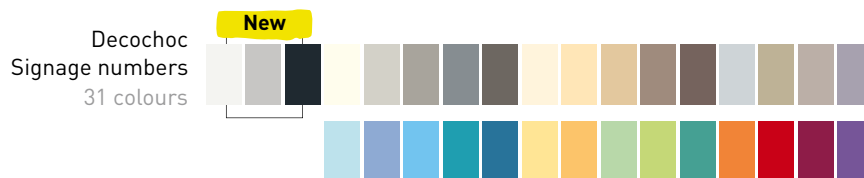

INLAYED SIGNAGE



FOR DECOCHOC PANEL HALF-HEIGHT DOOR PROTECTION

Applications

The inlaid signage with numerals or Early Childhood drawings individually identify your half-door protections in Decochoc by forming an effective and robust marking that is visible from a distance and easy to clean. The drawings will be highly appreciated by the young public in particular, who will be easily be able to find directions.


Description

- Model: Decochoc inlaid signage with numerals or Early Childhood drawings
- Height: 400 mm
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue
- Colours:
 - 31 standard for the numerals
 - 11 standard for the drawings (defined colours)

Specification

- Description: Inlaid signage in half-door Decochoc protection (Numerals or early childhood drawings as manufactured by Gerflor) from rigid and antibacterial PVC achieving Bs2d0 fire rating with solid colour and textured surface. 2 mm thick. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by the architect from manufacturer's standard range
- Installation method: glue as per manufacturer's instructions.

Specification can be downloaded from our website www.gerflor.com

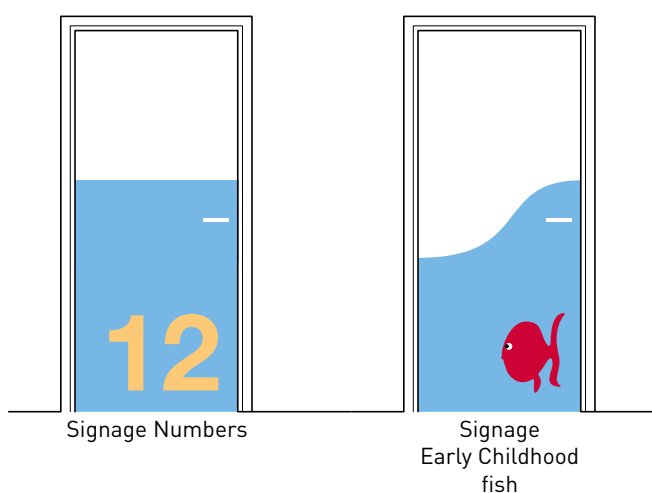

Rabbit



Monkey



Toucan



Beaver



Bear



Elephant



Lioness



Hippopotamus



Doe



Giraffe

EDGES AND FRAMES



DECOCHOC PROTECTION PANEL BENDS INTO L AND U SHAPES

Applications

Provides protection for door edges and simple frames edges against frequent impact from trolleys (corridors and entrances to healthcare facilities, laboratories...). Lateral edges are exposed to impacts from trolleys, beds... and below edges to water leaks in the door. U-bend is perfect for damp rooms such as bathrooms, sanitary arrangements, central kitchens...

Description


- Model: Cut-to-size protection and covering Decochoc panel according to requirements with bends into L and U shapes
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue or universal mastic-glue
- Colours: 31 standard

Specification


- Description: door protection and covering panel with bends into L or U for edge or frame protection (Decochoc as manufactured by Gerflor) from antibacterial PVC achieving Bs2d0 fire rating with solid colour. Lightly textured surface finish,

2 mm thick. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: Selected by architects from manufacturer's standard range
- Installation method: Glue as per manufacturer's instructions.



Specification can be downloaded from our website www.gerflor.com

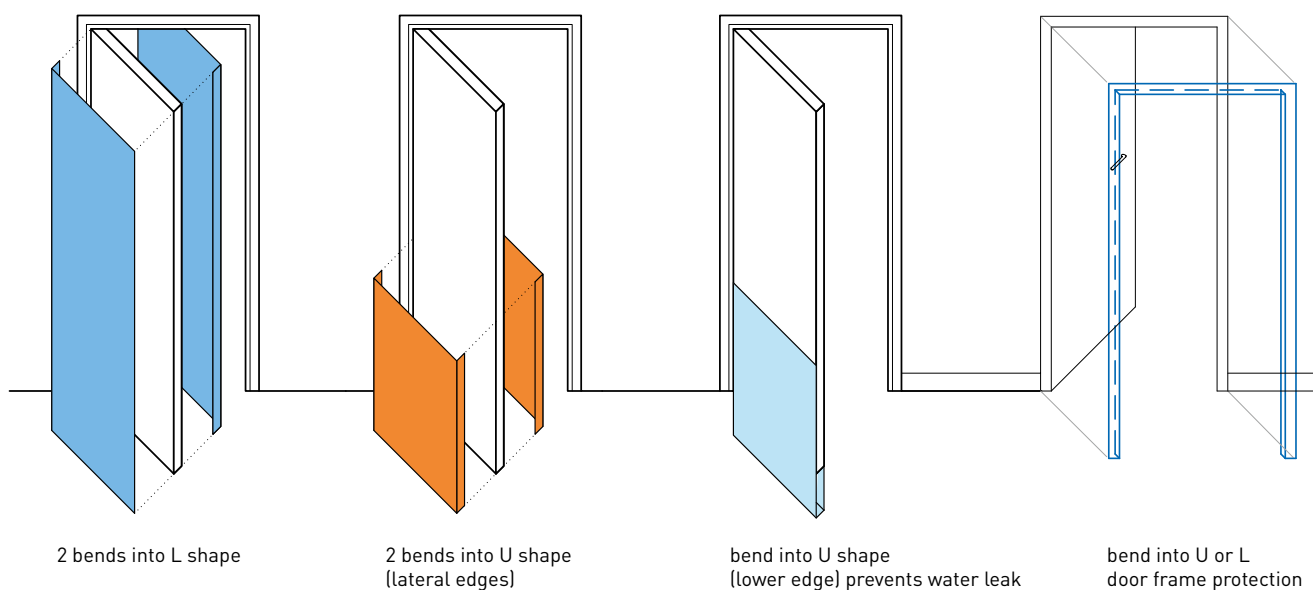

▶ DECOCHOC THERMOFORMING

Applications

For complex door frames which cannot be protected by L or U bends (corridors in hospitals, clinics, nursing homes...) and for rounds pillars.

Description

- Model: Cut-to-size Decochoc protection and covering panel according to requirements with thermoforming according to template provided
- Thickness: 2 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour
- Surface finish: lightly textured
- Fixing: adhesive bonding with Gerflor acrylic glue or universal mastic glue
- Colours: 31 standard

Specification

- Description: Cut to size and thermoformed protection and covering Decochoc panel (Decochoc as manufactured by Gerflor) from antibacterial PVC achieving Bs2d0 fire rating with solid colour. Lightly textured surface finish, 2 mm thick. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.
- Colour: selected by architects from manufacturer's standard range.
- Installation sequence:
Glue as per manufacturer's instructions.



Specification can be downloaded from our website www.gerflor.com



Thermoforming
Complex frame
protection

SPM HANDRAILS



Providing a good grip is a priority. Gerflor handrails have been designed with the greatest of care to aid mobility. Essentially, they are ergonomic, and provide both visual guidance (use of two-colour combinations) and wall protection.

Our systems are available in PVC or aluminium and can be adapted to fit any surface: walls where there is service ducts, curved walls, corners which are not 90°, while respecting the original decor.

SPM handrails protect against hand-borne infections

Inside establishments open to the public, and especially in health-care institutions, hygiene and the prevention of microbial contamination are permanent concerns.

In particular, the hands form a significant vector for the carriage and transmission of contamination, which may be deposited on handrails. According to research, 75 to 90% of in-hospital infection in health-care establishments may be due to hand-borne transmission.

Rough edges on the handrail, at the junctions between profile sections and finisher accessories, collect the majority of contamination and are the most difficult points to clean.

For this reason, all SPM handrails are fitted with bactericidal joints, treated integrally and undamaged by cleaning. Their bactericidal action, proved by an independent laboratory, complements the bacteriostatic and antibacterial properties of our handrails, all of which have a smooth finish.

SPM handrails provide effective help in the fight against the growth of microorganisms and the spread of infection.

	Code	Description	Material	Colour range
PERFORMER 2		Protection handrail	PVC + aluminium	15 colours
STARLINE WITH PVC SHEATH		Protection handrail with two-colour PVC band	PVC-sheathed aluminium + PVC band	12 two-colour combinations
ANODISED STARLINE		Aluminium handrail with two-colour PVC band	Aluminium + PVC band	6 two-colour options for the band
DECOWOOD STARLINE		Aluminium handrail with wood effect band	Aluminium + wood effect band	8 wood effect colours for the band
ESCORT WITH PVC SHEATH		Round handrail, diameter 40 mm	PVC + aluminium	28 colours
DECOWOOD ESCORT		Wood effect round handrail, diameter 40 mm	PVC + aluminium	8 wood effect colours
ANODISED ESCORT		Aluminium round handrail, diameter 40 mm	Aluminium	Satin silver anodised (or coated on request)



PERFORMER 2 p.66-67
Protection handrail



STARLINE WITH PVC SHEATH p.68-69
Handrail with two-colour PVC band



ANODISED STARLINE p.68-69
Aluminium handrail
with two-colour PVC band



DECOWOOD STARLINE p.70-71
Aluminium handrail
with wood effect band



ESCORT WITH PVC SHEATH p.72-73
Round handrail, diameter 40 mm




DECOWOOD ESCORT p.74-75
Wood effect round handrail,
diameter 40 mm



ANODISED ESCORT p.74-75
Aluminium round handrail,
diameter 40 mm



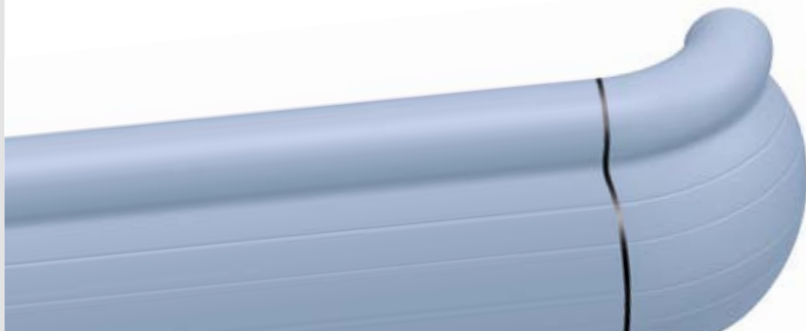

Innovation Bactericidal joint

PERFORMER 2



▶ WALL PROTECTION AND HANDRAIL

Applications

Offering both an excellent handgrip and impact resistance for corridors, this protection handrail, is ideal for all public buildings: hospitals, clinics, re-education centres, retirement homes. It benefits from a patented installation system called autoclip® which facilitates and speeds up the installation and helps to hide any faults in the wall. It is fitted with bactericidal joints (see page 64).

Specification

- Description: Hand and wall protection rail (Performer 2 as manufactured by Gerflor) comprising 3 mm thick smooth and antibacterial PVC profile with a depth of 140 mm achieving Bs2d0 fire rating and solid colour. The system combines a completely smooth tubular upper part and a lower wall protection rail with decorative grooves. The PVC profile snap-fixes to a continuous aluminium section and finish is provided by smooth PVC finishing accessories with decorative grooves (wall returns, 90° external angles). The unit is fitted in the spacer with adjustable in depth aluminium clamp. Overall projection is adjustable,


minimum 105 mm.

Bactericidal joints are provided for the junctions between profile sections and accessories.


No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: Selected by architects from manufacturer's standard range.

- Installation sequence: Upper edge of section 0.90 m max. above floor level. Adjustable fixing on composite spacers to be fitted at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard). Wall returns fixing with pop rivets.



Specification and technical drawings can be downloaded from our website www.gerflor.com

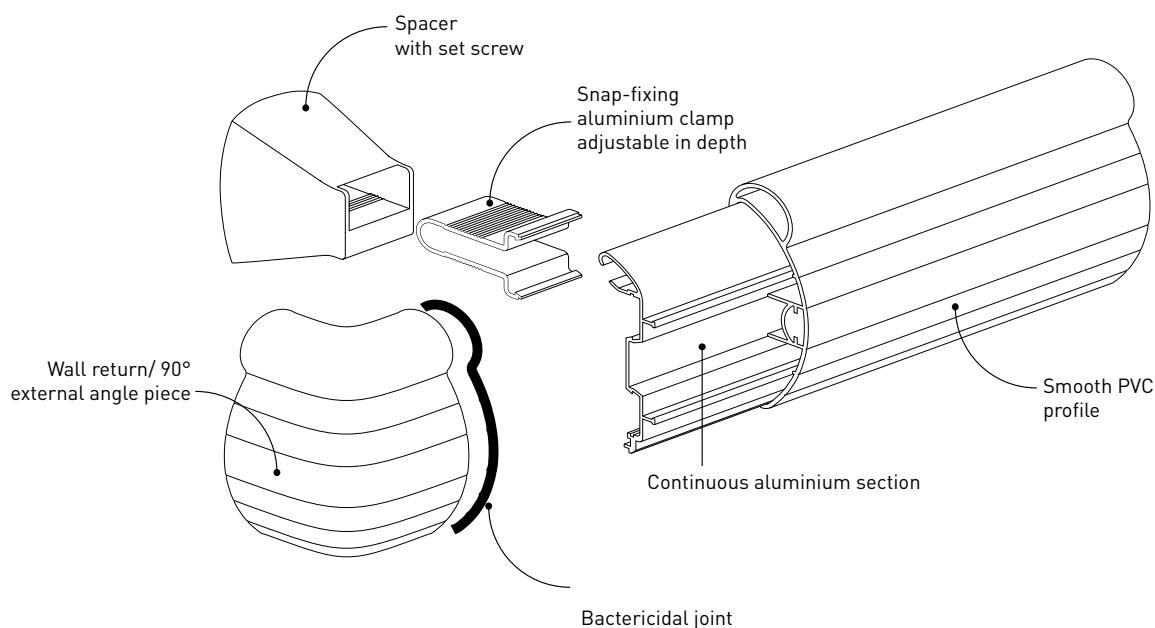

Performer 2
15 colours*




*and 13 colours on request with
a minimum order quantity

Description


- Model: Performer 2 wall protection and handrail
- Section depth: 140 mm
- Length: 4 m
- Tubular upper part diameter: 40 mm
- Overall projection: Minimum 105 mm adjustable
- Stand-off from wall: Minimum 55 mm adjustable
- Material: 3 mm thick antibacterial PVC, Bs2d0 fire-rated, solid colour

- Surface finish: Smooth upper handrail, smooth wall protection rail with decorative grooves
- Fixing components: Adjustable fixing on composite spacers to be fitted at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard)
- Colours: 15 standard

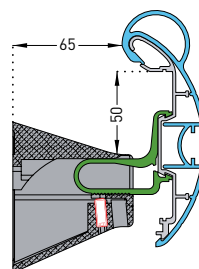

Performer 2

This version has been adapted for the UK in accordance with approved Document M to satisfy the DDA requirements

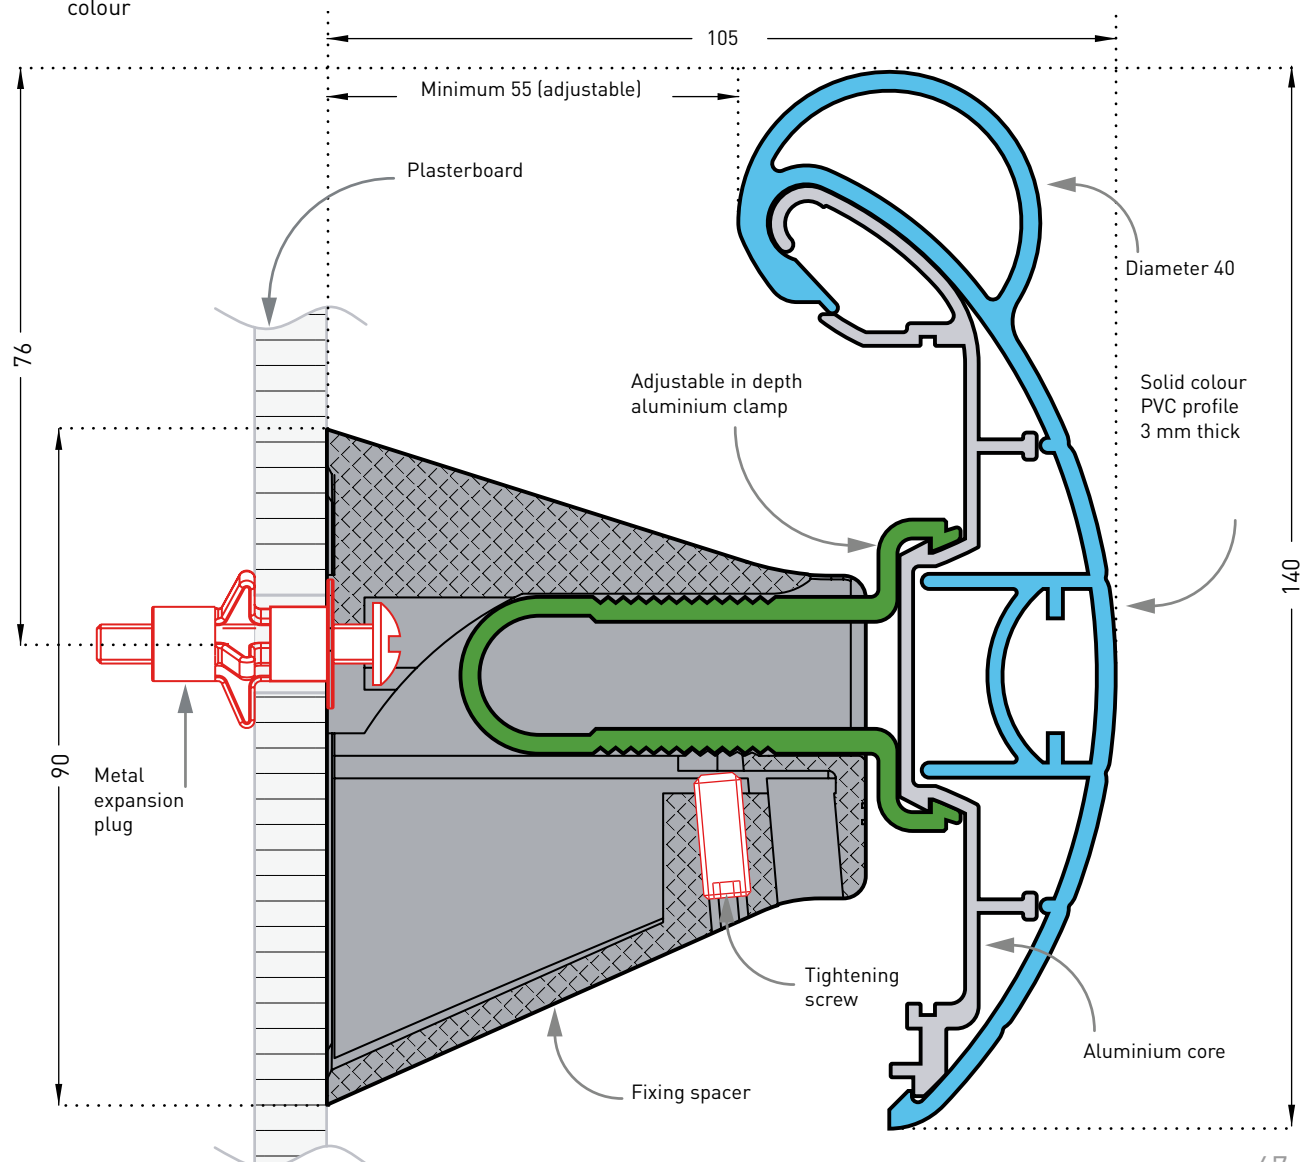

To find the colours available for each product, please see the summary table for the range at the end of this Guide.



Innovation Bactericidal joint

STARLINE WITH PVC SHEATH

ANODISED STARLINE



▶ HANDRAILS WITH TWO-COLOUR PVC BAND

Applications

A combination of technology and elegant design, the Starline range is the ideal solution for all straight and curved corridor areas in public buildings: hospitals, clinics, retirement homes, hotels, offices. Starline can be bent for curved sections. A removable system is available to provide continuation of the handrail in front of service ducts. It is fitted with bactericidal joints (see page 64).

Specification

- Description: Anodised aluminium or antibacterial PVC-sheathed handrail with a two-colour smooth PVC band (Starline as manufactured by Gerflor). The profile is satin silver anodised aluminium or PVC-sheathed aluminium, with a groove into which the 40 mm high satin silver anodised aluminium curved brackets slide and lock. Accessories (wall returns, 90° internal and external angle pieces or made-to-measure from 90° to 160°) made of antibacterial smooth and solid colour PVC are fitted into the profile. A self-adhesive two colour semi-rigid PVC protection band is bonded to the rail assembly. The depth of the handrail is 90 mm, it has an overall projection of 84 mm and a thickness of 34 mm.


Bactericidal joints are provided for the junctions between profile sections and accessories. The profile can be curved.

No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: Selected by architects from manufacturer's standard range.

- Installation sequence: Upper edge of section 0.90 m max. above floor level. Fixes to self-locking 2-point perforated brackets screwed to the wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard). Wall returns fixing with pop rivets.



Specification and technical drawings can be downloaded from our website www.gerflor.com

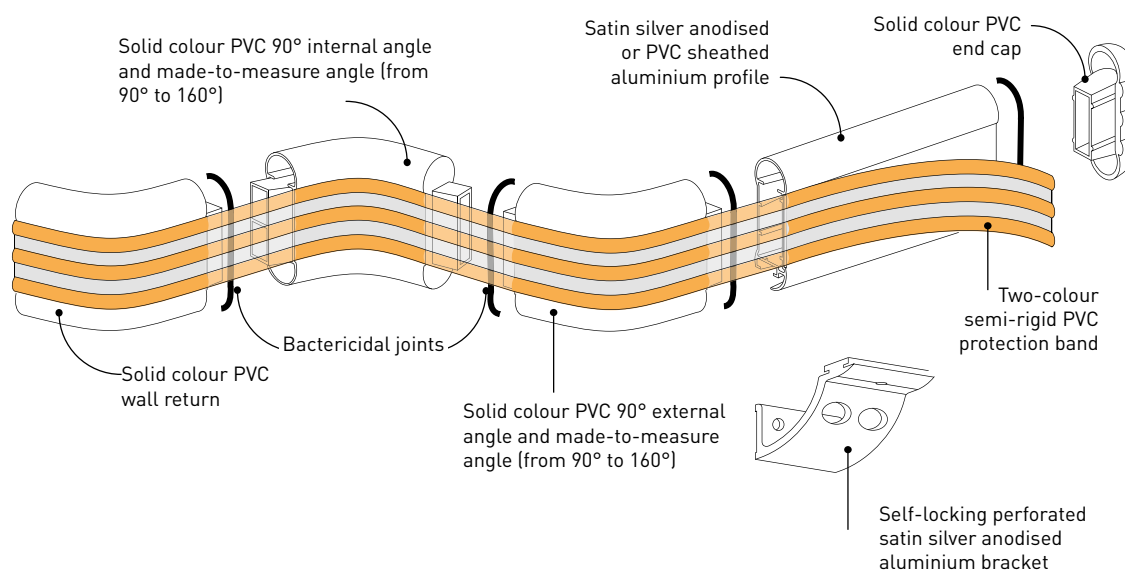

3 profile finishes




6 two-colour protection band

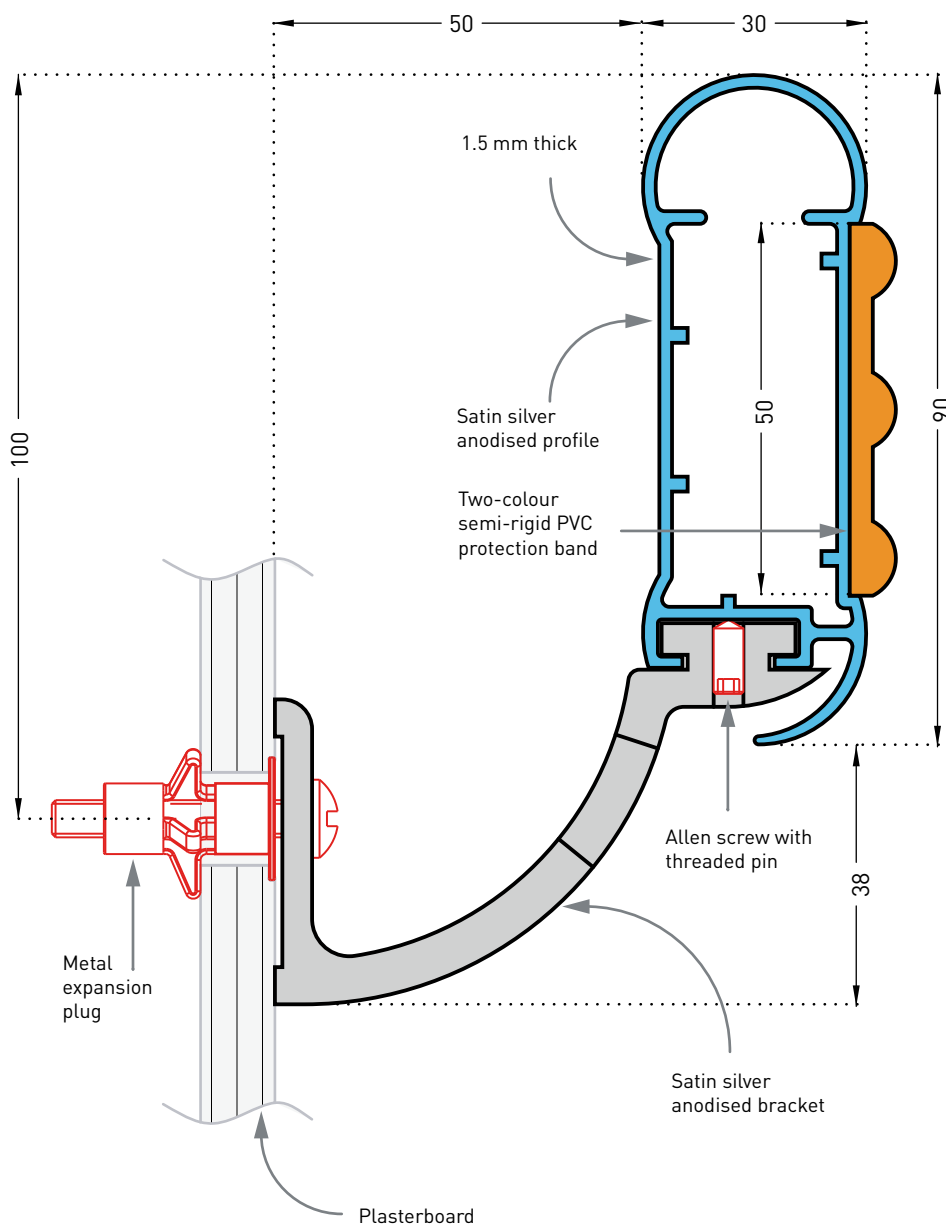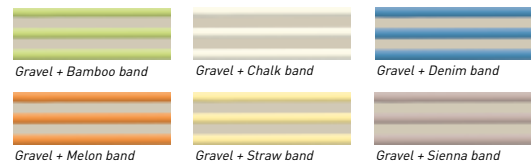

Anodised Starline

Description

- Model: Starline anodised aluminium or antibacterial PVC-sheathed handrail with a two-colour PVC protection band
- Section depth: 90 mm
- Length: 4 m
- Thickness: 34 mm
- Overall projection: 84 mm
- Stand-off from wall: 50 mm
- Material: Satin silver anodised aluminium profile with a semi-rigid PVC band, or aluminium profile with an antibacterial and Bs2d0 fire-rated PVC sheath and a semi-rigid PVC band, bactericidal joints
- Fixing components: 2-point self-locking perforated satin silver anodised aluminium brackets, screwed to wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard)
- Colours:
 - 3 finishes for aluminium profile
 - 6 two-colour bands

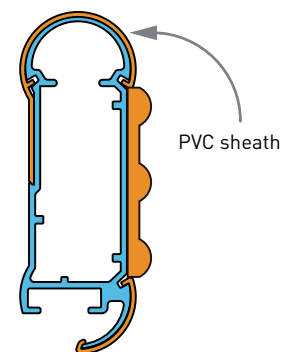

Starline with PVC sheath



Innovation Bactericidal joint

DECOWOOD STARLINE



▶ ALUMINIUM HANDRAIL WITH WOOD EFFECT BAND

Applications

The Decowood Starline provides both a good grip and a stylish decorative touch with its wood effect band. It is ideally suited for straight and curved corridor areas with light traffic of trolleys in public buildings: hospitals, clinics, retirement homes, hotels, offices. Starline can be bent for curved sections. A removeable system is available to provide continuation of the handrail in front of service ducts. It is fitted with bactericidal joints (see page 64).


Specification

- Description: Anodised aluminium handrail with a wood effect band (Decowood Starline as manufactured by Gerflor). The profile is satin silver anodised aluminium with a groove into which the 40 mm high satin silver anodised aluminium curved brackets slide and lock. Accessories (wall returns, 90° internal and external angle pieces or made-to-measure from 90° to 160°) made of antibacterial smooth silver tone PVC are fitted into the profile. The wood effect band is already fixed on the profile and the accessories. The depth of the handrail is 90 mm, it has an overall projection of 80 mm and a thickness of 30 mm.


Bactericidal joints are provided for the junctions between profile sections and accessories. The profile can be curved.


- Band colour: Selected by architects from manufacturer's standard range.

- Installation sequence: Upper edge of section 0.90 m max. above floor level. Fixes to self-locking 2-point perforated brackets screwed to the wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard). Wall returns fixing with pop rivets.



Specification and technical drawings can be downloaded from our website www.gerflor.com

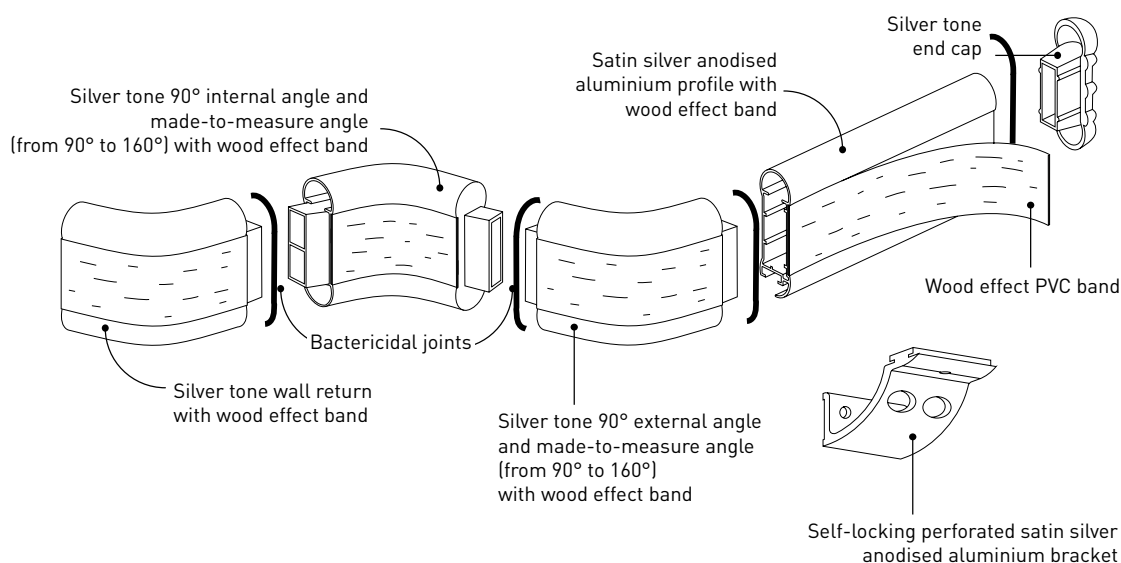

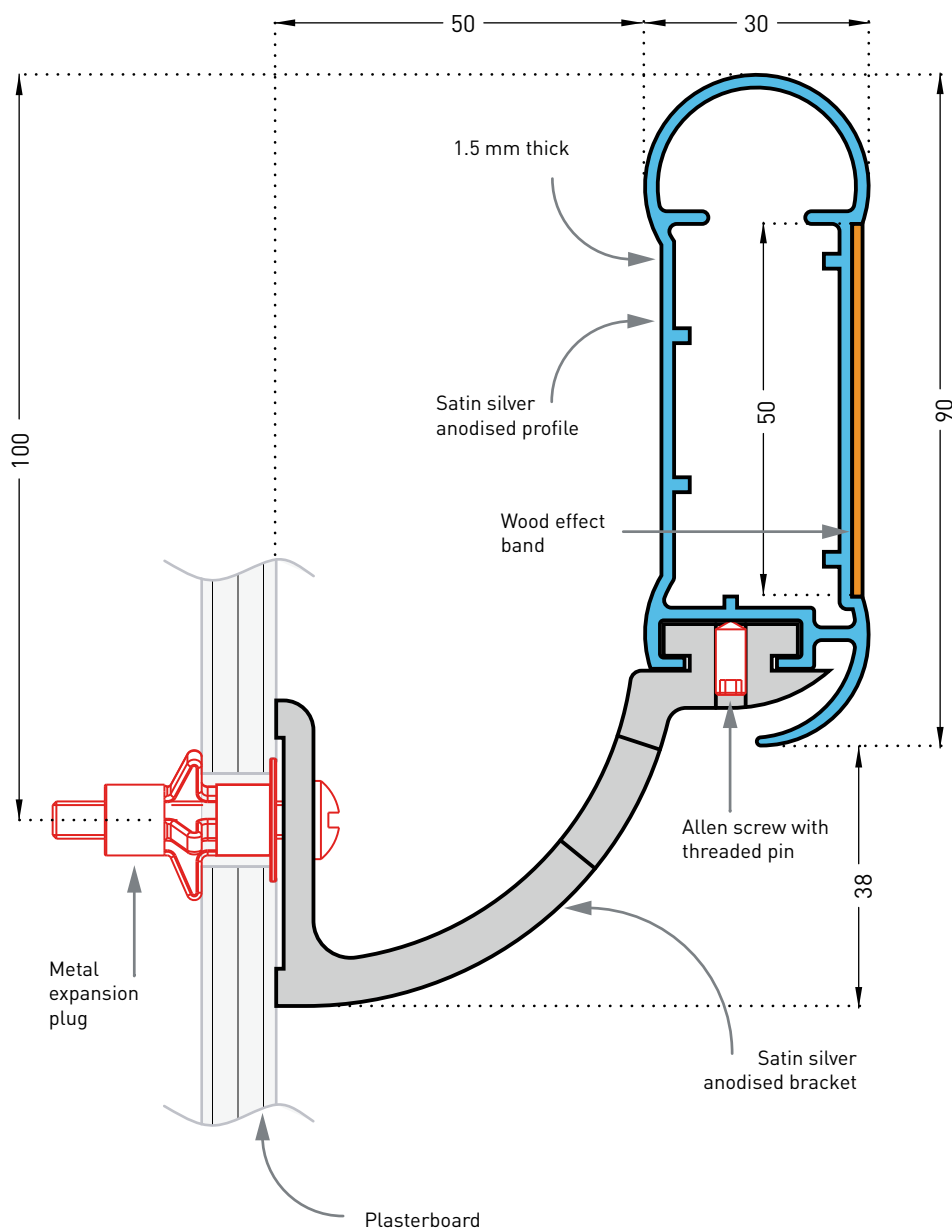

Description

- Model: Starline Decowood anodised aluminium handrail with wood effect band
- Section depth: 90 mm
- Length: 4 m
- Thickness: 30 mm
- Overall projection: 80 mm
- Stand-off from wall: 50 mm
- Material: Satin silver anodised aluminium profile with wood effect band and bactericidal joints
- Fixing components: 2-point self-locking perforated satin silver anodised aluminium brackets, screwed to wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard)
- Colours: 8 wood effect for the band



Innovation
Bactericidal joint

ESCORT WITH PVC SHEATH



DIAMETER 40 MM ROUND HANDRAIL

Applications

Escort is designed to provide a high quality grip and classic look. Highly appreciated by mobility-impaired persons for its perfect roundness and pleasant feel, Escort 40 is ideal for all corridors and stairways in retirement homes, hospitals, clinics, rehabilitation centres, collective housing. Escort can be bent for curved sections. A removeable system is available to provide continuation of the handrail in front of service ducts. It is fitted with bactericidal joints (see page 64).


Specification

- Description: Round handrail with antibacterial PVC sheath (Escort PVC sheath as manufactured by Gerflor) with a diameter of 40 mm. The rail consists of an aluminium section covered by a sheath of smooth and antibacterial PVC achieving Bs2d0 fire rating with solid colour. The section comprises a groove into which brackets, accessories and matching closers slide and lock. Perforated brackets are curved, 40 mm deep and made of satin silver anodised aluminium. Overall projection and depth are 80 mm. Accessories made of smooth PVC (wall returns, external and internal 90° angle pieces or made to measure from 90° to 165°, slope links) are fitted


on the section and fixed with locking screws accessories. Bactericidal joints are provided for the junctions between profile sections and accessories. The profile can be curved. No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: Selected by architects from manufacturer's standard range.



- Installation sequence: Upper edge of section 0.90 m max. above floor level. Fixes to 2-point self-locking perforated aluminium brackets at 1.20 m centres (0.80 m centres in heavy traffic areas and on light partitions like plasterboard).



Specification and technical drawings can be downloaded from our website www.gerflor.com

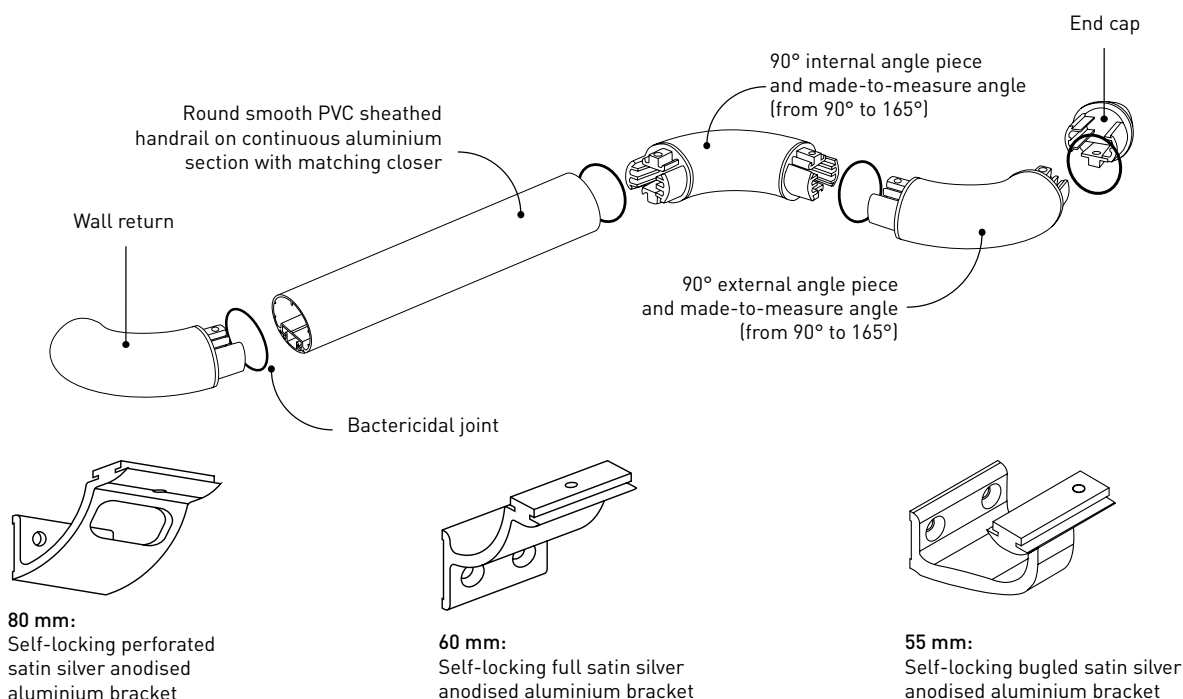


Escort
28 colours

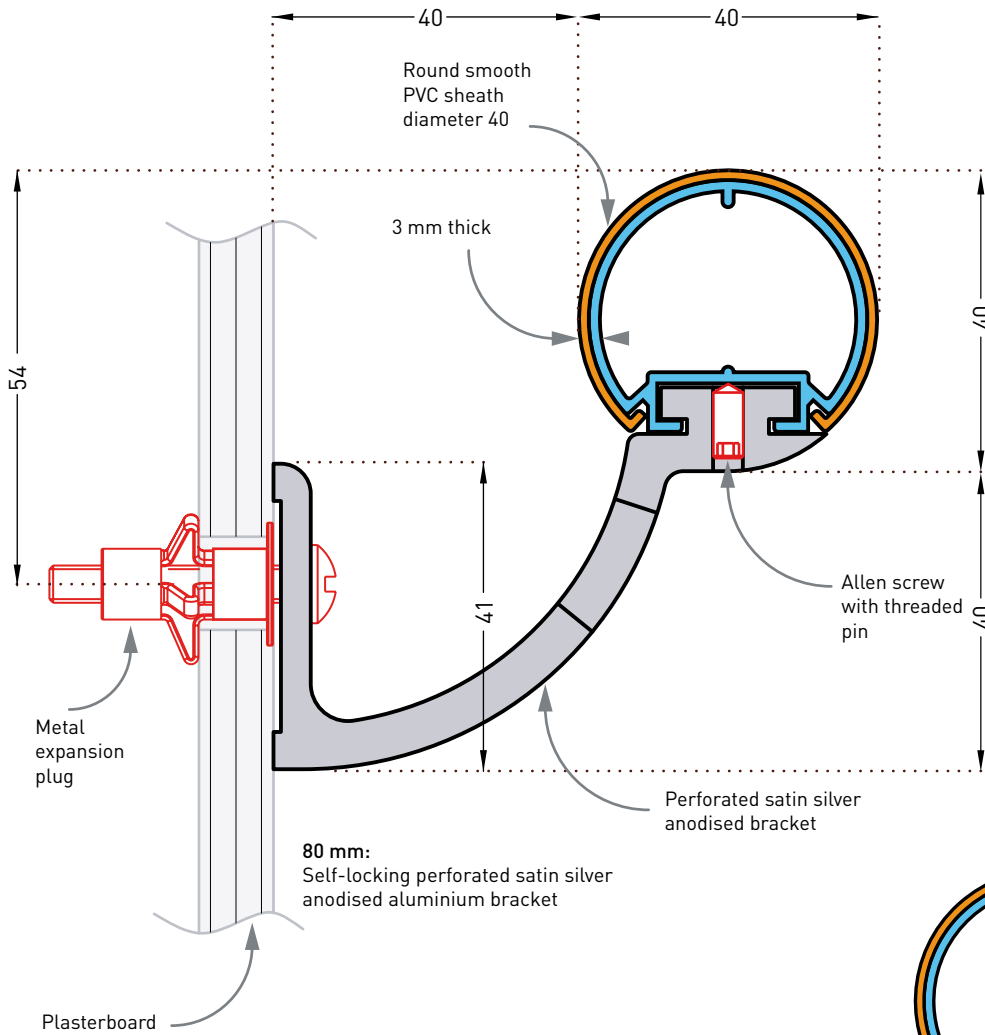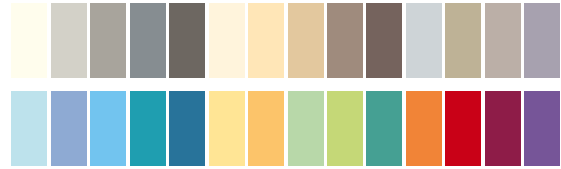


Description


- Model: Escort round handrail with antibacterial PVC sheath
- Diameter: 40 mm
- Length: 4 m
- Overall projection: 80 mm
- Stand-off from wall: 40 mm
- Material: Antibacterial and Bs2d0 fire-rated PVC, solid colour, on continuous aluminium section, bactericidal joints
- Fixing components: 2-point self-locking perforated brackets, satin silver anodised aluminium finish, screwed to wall at 1.20 m centres (0.80 m centres in heavy traffic areas and on light partitions like plasterboard)
- Colours: 28 standard

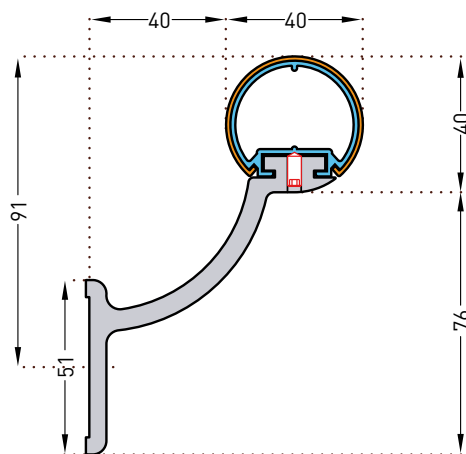

60 mm:
Self-locking full satin silver anodised aluminium bracket

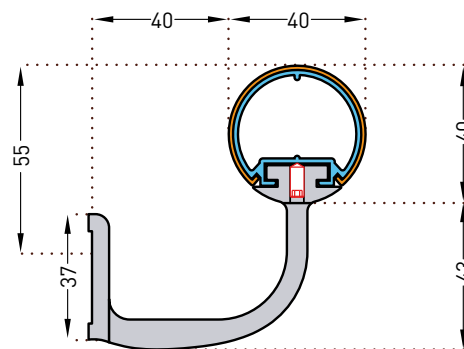

55 mm:
Self-locking bugled satin silver anodised aluminium bracket

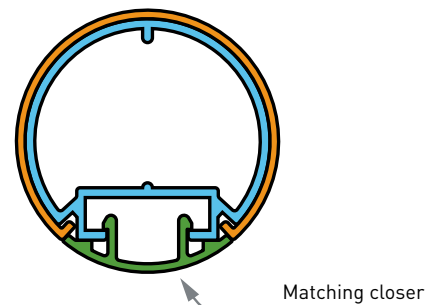



Innovation Bactericidal joint

DECOWOOD ESCORT

ANODISED ESCORT



▶ DIAMETER 40 MM ROUND HANDRAILS

Applications

Particularly elegant handrails with a wood effect or an aluminium finish (satin silver anodised) and curved, unobtrusive brackets. They are ideal for all buildings open to the public: corridors and stairways in retirement homes, schools, hotels, residential apartment buildings, offices, etc. Escort can be bent for curved sections. A removeable system is available to provide continuation of the handrail in front of service ducts. They are fitted with bactericidal joints (see page 64).

Specification

- Description: Round satin silver anodised aluminium or wood effect handrail with a diameter of 40 mm (Escort anodised or Decowood Escort as manufactured by Gerflor). The satin silver anodised aluminium profile comprises a groove into which brackets, accessories and matching closer slide and lock. Perforated brackets are curved, 40 mm deep and made of satin silver anodised aluminium. Overall projection and depth are 80 mm. Accessories made of smooth silver finish, chromium look or wood effect PVC (wall returns, external and internal 90° angle pieces or made-to-measure from 90° to 165°, slope links) are fitted on the


profile and fixed with locking screws.

Bactericidal joints are provided for the junctions between profile sections and accessories. The profiles can be curved.


No heavy metals are used in its manufacture and the calcium-zinc thermal stabilisation process is used.

- Colour: Selected by architects from manufacturer's standard range.
- Installation sequence: Upper edge of section 0.90 m max. above floor level. Fixes to 2-point self-locking perforated aluminium brackets at 1.20 m centres (0.80 m centres in heavy traffic areas and on light partitions like plasterboard).


Specification and technical drawings can be downloaded from our website www.gerflor.com

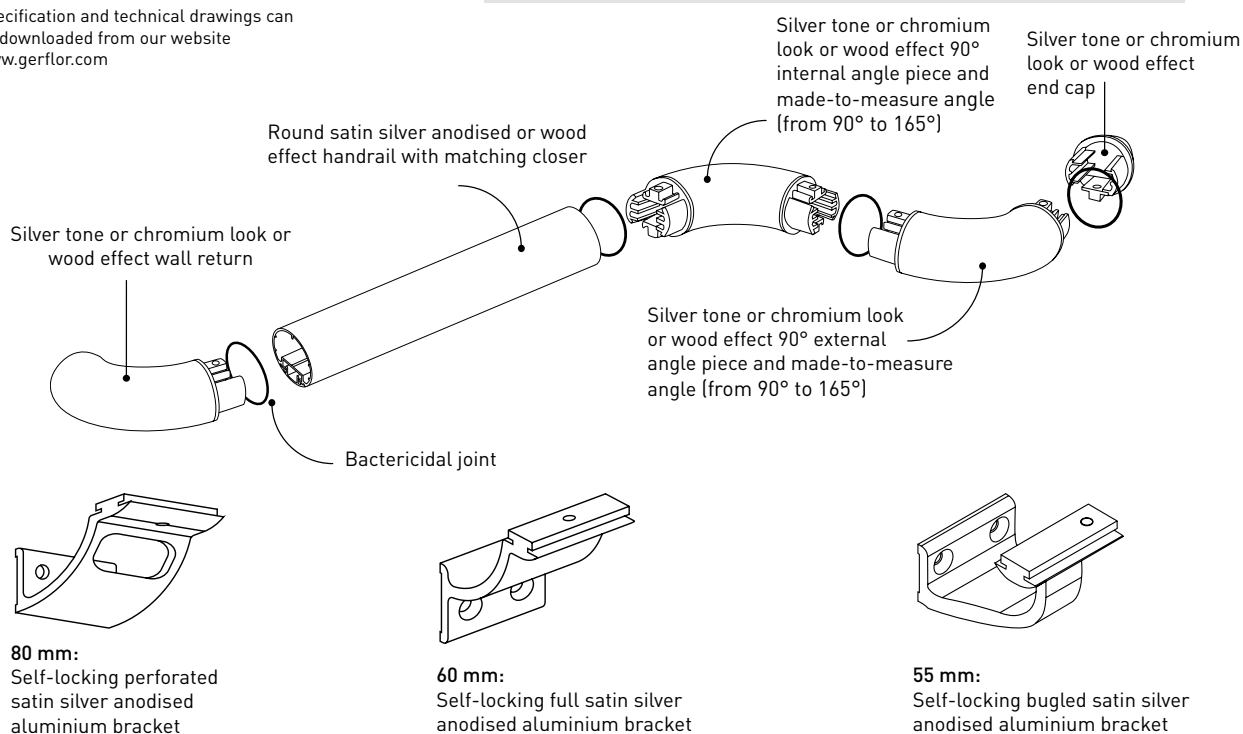



Escort Decowood
3 finishes
for accessories



Escort Decowood
8 wood effect colours




Anodised Escort

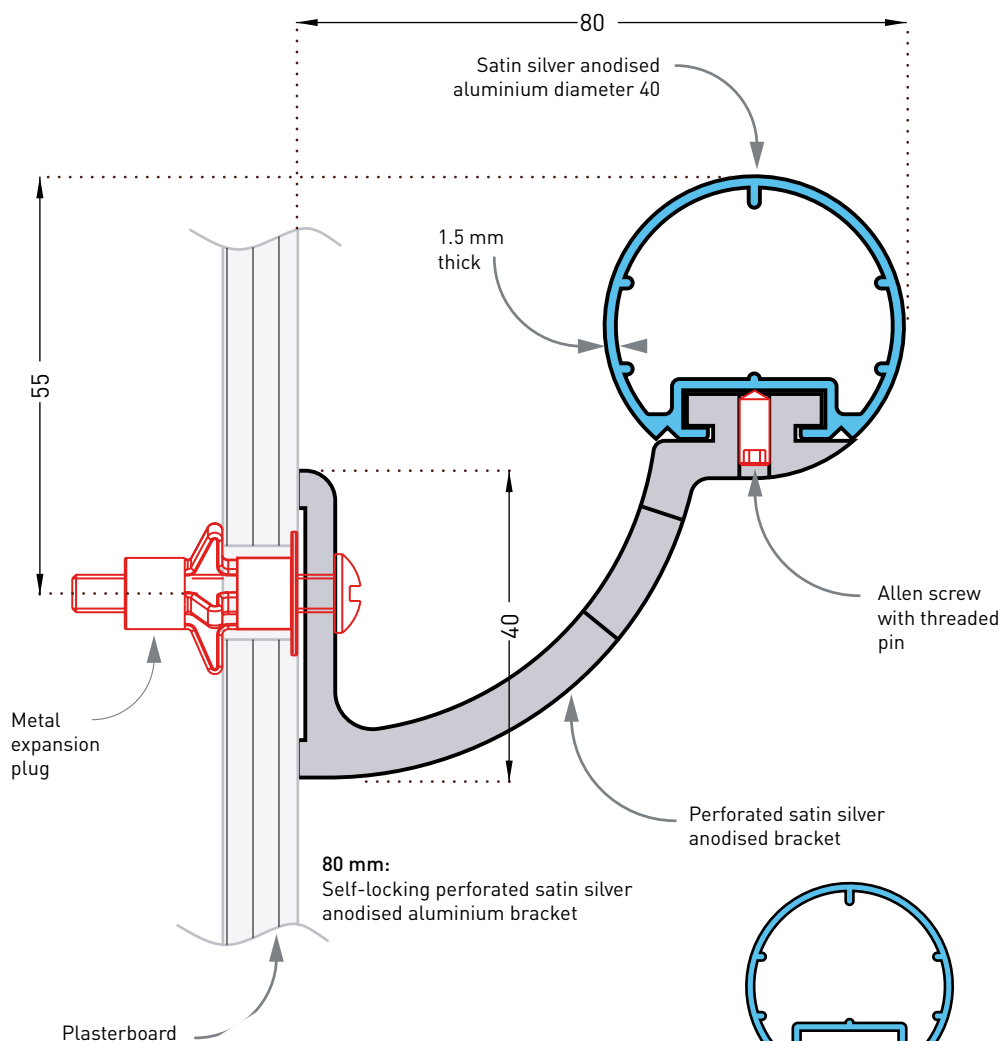



Description


- Model: Escort anodised or Decowood round handrail
- Diameter: 40 mm
- Length: 4 m
- Overall projection: 80 mm
- Stand-off from wall: 40 mm
- Material: 10 micron satin silver anodised aluminium or wood effect PVC
- Fixing components: 2-point self-locking perforated brackets, satin silver anodised aluminium finish, screwed to wall at 1.20 m centres (0.80 m centres in heavy traffic corridors and on light partitions like plasterboard)
- Colours: Satin silver anodised or 8 wood effect colours. Coating on request.

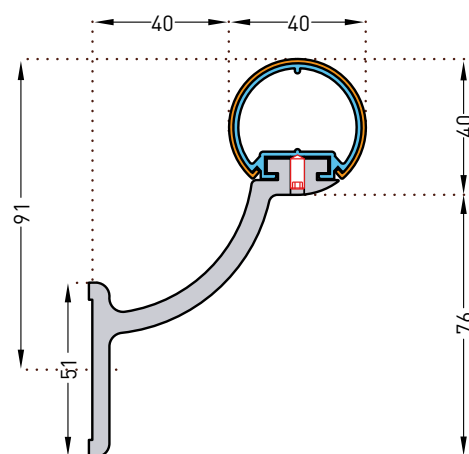

60 mm:
Self-locking full satin silver anodised aluminium bracket

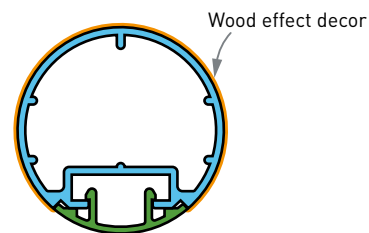

Matching closer

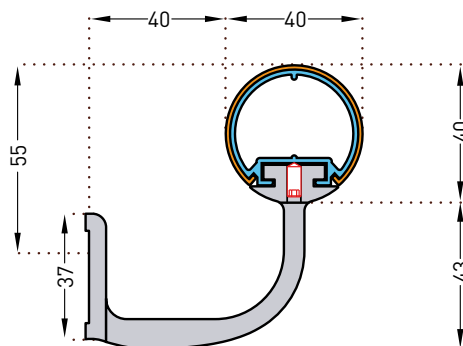

55 mm:
Self-locking bugled satin silver anodised aluminium bracket

NEW

FIN'ALU




FINISHING AND JOINTING PROFILES DECOCHOC, DECOWOOD AND DECOTREND PANELS

Applications

Fin'alu profiles are designed to finish or joint Decochoc, Decowood and Decotrend protection panels and to bring a decorative and up-market original touch. They provide a perfect finish in low-traffic corridors, waiting rooms or bedrooms. They fit into healthcare facilities (hospitals, clinics, retirement homes) as well as hotels and service sector.

Description


- Model: Fin'Alu finishing (J shape) or jointing (H shape) profile for 2 mm thick panels
- Width (covering): 18 mm (37.5 mm hidden part) for finishing profile; 42 mm (55 mm hidden part) for joint profile
- Length: 3 m
- Material: satin silver anodised aluminium
- Surface finish: smooth
- Fixing: adhesive bonding with Gerflor acrylic glue or screwing to wall
- Colour: satin silver anodised

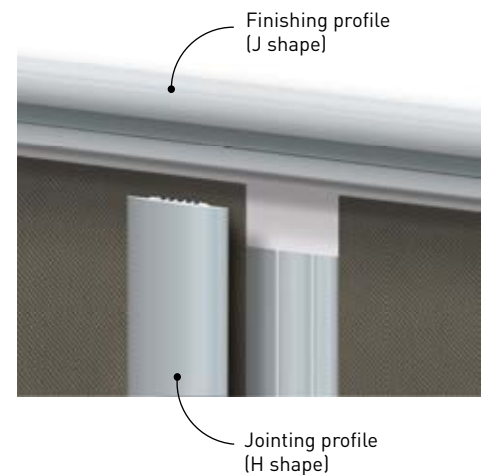


Specification

- Description: Finishing profile (J shape) in satin silver anodised aluminium (Fin'Alu finishing profile in J shape as manufactured by Gerflor) designed for vertical or horizontal finishing for 2 mm thick protection panels (Decochoc, Decowood or Decotrend as manufactured by Gerflor). Smooth surface, 3 m long, 18 mm wide for the visible part and 37.5 mm for the hidden part fixed to the wall.
- Colour: Selected by architects from manufacturer's standard range.
- Installation method: glue as per manufacturer's instructions or screwing to wall.
- Description: Jointing profile (H shape) in satin silver anodised aluminium (Fin'Alu jointing profile in H shape as manufactured by Gerflor) designed for vertical or horizontal jointing between 2 mm thick protection panels (Decochoc, Decowood or Decotrend as manufactured by Gerflor). Smooth surface. The profile, 3 m long and 42 mm wide (visible part) snap fixes onto the continuous aluminium rail, 55 mm wide (hidden part).
- Colour: Selected by architects from manufacturer's standard range.
- Installation method: snap-fixing onto aluminium rail to glue to wall as per manufacturer's instructions.

Finishing profile (into J shape)

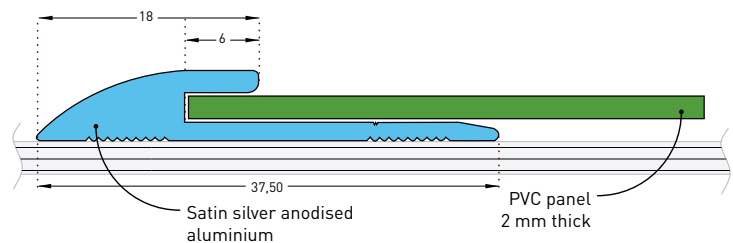

Jointing profile (into H shape)

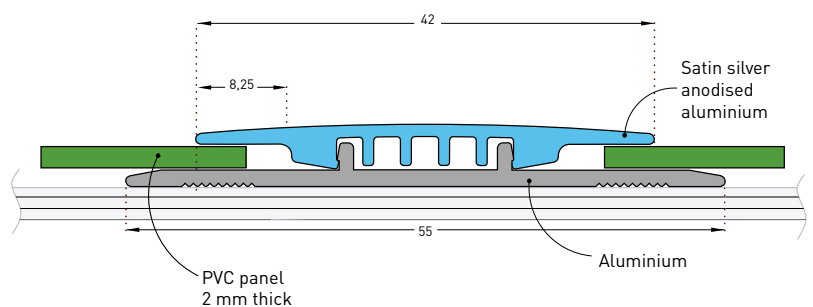





THERMOFORMING



PILLAR AND DOOR FRAME PROTECTION WITH DECOCHOC, DECOWOOD AND DECOTREND PANELS

Applications


In order to adapt to all building layouts, Decochoc, Decowood and Decotrend panels can be thermoformed to cover round pillars (diameter less than 800 mm) and complex door frames that can not be protected with simple L or U bends.

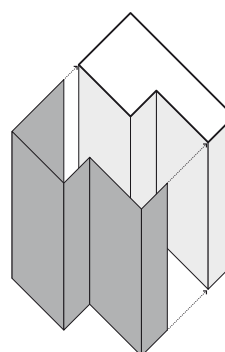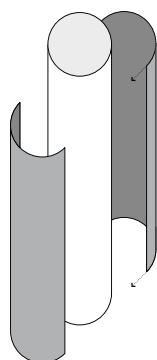

GLUES, SILICONE JOINTS, WELDING JOINTS




FOR PROTECTION PANELS AND CORNER PROTECTORS



SPM silicone joint

Silicone joints with fungicidal features are used to join protection panels together, with door frames or skirtings to make them waterproof. They are available in all the colours of the range in order to match the protection panel colours. 310 ml cartridge.




SPM welding joints

The welding joints, available in all colours of the range, enable joints to be welded together with two panels or a panel with a PVC floor-wall cove to make it waterproof. They are particularly recommended in operating areas or high-level hygiene areas. 100 ml roll, ø 4mm.




SPM acrylic glue without solvent – Simple bonding

SPM acrylic glue may be applied on any type of support and is particularly recommended for protection plates and panels such as Contact, Decochoc, Decoclean, Decowood or Decotrend. Without solvent and odourless it is appropriate for all buildings open to the public. 6 kg or 14 kg can.



* Information about the emission level of volatile substance in inside air, involving a toxic risk by inhalation, on a scale from A+ (very low emissions) to C (high emissions).



SPM multi-purpose solvent-free adhesive mastic

SPM multi-purpose adhesive mastic is particularly adapted for the reinforcement of adhesives profiles (Profila, Protecta 2, Contact). Furthermore, it suits perfectly for installation in damp backgrounds. It is also suitable for protection panels: Decochoc, Decoclean, Decowood, Decotrend, Plac'Inox, according to the type of wall. 290 ml cartridge.



SOLUTIONS FOR HANDRAILS


▶ IN FRONT OF SERVICE DUCTS

Applications

Quick-removable system (assembly wedges) designed to make easy access to service duct gates whilst providing continuation of the handrails and secure handgrip for people. Available for Escort and Starline handrails.


Service duct gates longer than 800 mm.

It is necessary to place a quick-removable bracket onto the service duct access gate.



Starline handrail

For Starline handrail, SPM can provide a 800 mm ready-to-install kit.

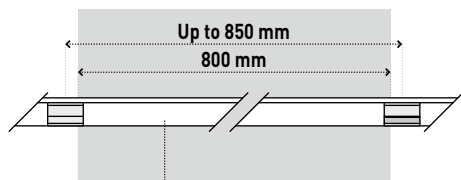


800 mm length of Starline profile, especially machined for service duct. (Other sizes available on request)


Escort handrail

For Escort handrail, the service duct kit is installed on site :

- by cutting the profile to the length of the access gate using two 45° cuts and two quick-removable assembly wedges

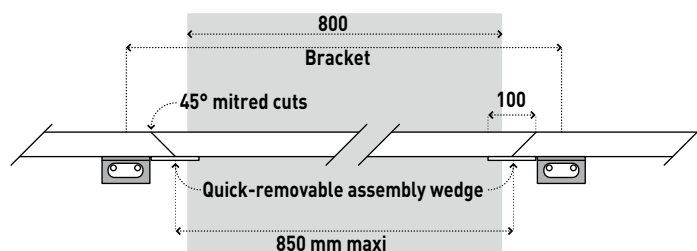




- by using **Rapid'Access**, the articulated link especially designed for service duct, to complete with one quick-removable assembly wedge.

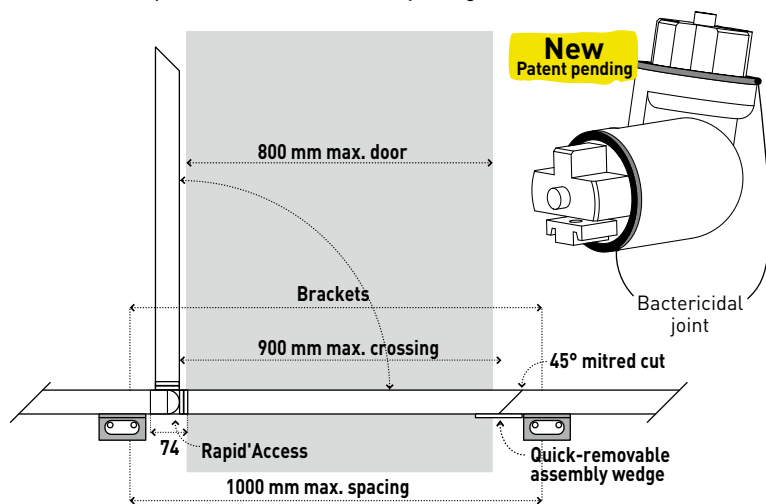

▶ CURVING

Applications

Curving of Starline and Escort handrails to fit in different building layouts.

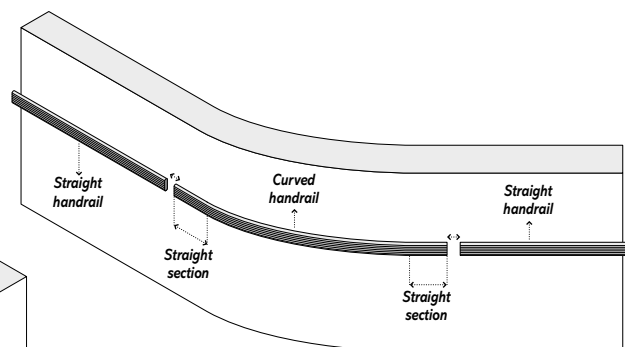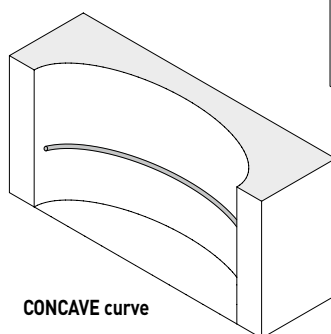


SOLUTIONS FOR ESCORT HANDRAILS

▶ JOINTING ACCESSORY

Applications

Aluminium joining piece with bactericidal joint to bring perfectly into line and to hold tight between two straight lengths of Escort handrail.

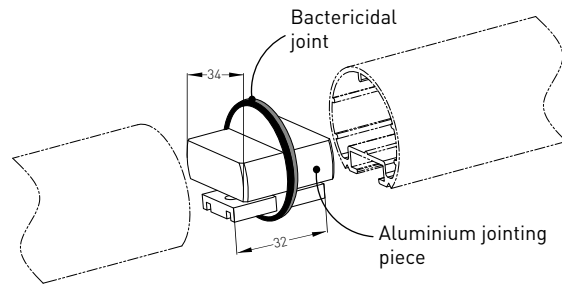


▶ RAPID'ANGLE FOR STAIRCASES AND FOR 80° TO 180° ANGLES

Applications

Gerflor has developed **Rapid'Angle** for Escort round handrails especially designed:


- to fit in all staircase layouts with slope link and angled slope link : rotating 3D
- to fit all angles: modular from 80° to 180°

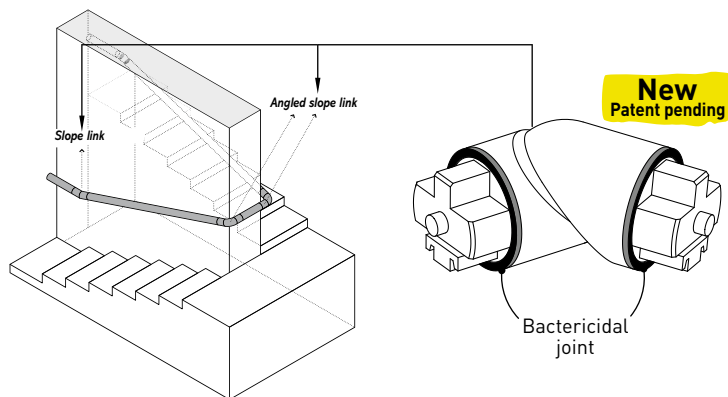

▶ DUAL-HEIGHT SPECIAL "ACCESSIBILITY" BRACKET

Applications


This dual-height bracket simplifies the installation of handrails at two heights: one at the standard height and the other for children and/or those using wheelchairs. The height of the lower handrail has been specially designed to provide a comfortable aid to help such people to move around. This accessory simplifies installation since only one set of horizontal marking outs is required for two levels of handrail.

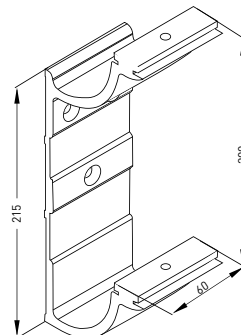

▶ TACTILE MARK

Applications

Unique design for this assembly wedge of tactile mark to be fitted in under the Escort handrail to provide locating help to visually impaired persons. Repeated, it helps indicate the where on the floor we are.

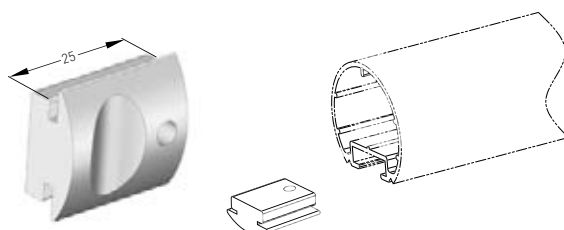

COLOUR AVAILABILITY SUMMARY CHART

		<div>New</div>																
		0031 - Alum	0032 - Flint	0033 - Slate	0001 - Chalk	0002 - Gravel	0003 - Clay	0004 - Granite	0005 - Schist	0006 - Ivory	0007 - Wicker	0008 - Sand	0009 - Sienna	0010 - Bark	0011 - Pebble	0013 - Greige	0014 - Cinnamon	0015 - Lavender grey
WALL PROTECTION																		
IMPACT 200	p.30				*	*	*	*	*	*	*	*	*	*	*	*	*	*
IMPACT 120	p.30				*	*	*	*	*	*	*	*	*	*	*	*	*	*
IMPACT 60	p.30				*			*		*	*				*			
CONTACT 350	p.34				*	*	*	*	*	*	*		*		*			
CONTACT 200	p.34				*	*	*	*	*	*	*	*	*	*	*	*	*	*
CONTACT 120	p.34				*			*		*	*				*			
ALINEA 200	p.32																	
ALINEA 120	p.32																	
DECOCHOC	p.36	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
DECOCLEAN	p.43				*			*		*	*				*			
DECOTREND	p.44																	
DECOWOOD	p.44																	
BEDKIT	p.45				*	*	*	*	*	*	*	*	*	*	*	*	*	*
CORNER PROTECTORS																		
CAPCORN	p.48				*			*		*	*				*			
CORNEA	p.49				*	*	*	*	*	*	*	*	*	*	*	*	*	*
CORNEAFLEX	p.50				*			*		*	*				*			
PROTECTA 2	p.52				*	*	*	*	*	*	*	*	*	*	*	*	*	*
PROFILA 50	p.53				*	*	*	*	*	*	*	*	*	*	*	*	*	*
PROFILA 30	p.53				*	*	*	*	*	*	*	*	*	*	*	*	*	*
DOOR PROTECTION																		
FOOT-HEIGHT DOOR CONTACT 200 PLATES	p.56				*	*	*	*	*	*	*	*	*	*	*	*	*	*
FOOT-HEIGHT DOOR CONTACT 350 PLATES	p.56				*	*	*	*	*	*	*		*		*			
HALF-HEIGHT STRAIGHT DOOR DECOCHOC PANEL	p.57	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
HALF-HEIGHT DECORATIVE DOOR DECOCHOC PANEL	p.58	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
HANDPLATES DECOCHOC PANEL	p.60	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
INLAYED SIGNAGE DECOCHOC PANEL	p.61	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
EDGES AND FRAMES DECOCHOC PANEL	p.62	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
THERMOFORMING DECOCHOC PANEL	p.63	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

*	On stock (subject to stock availability)		On order with a minimum order quantity ⁽¹⁾
---	---	--	---

(1) Minimum quantity: 200 ml within 4 to 8 weeks - depending on products and colours

COLOUR AVAILABILITY SUMMARY CHART

		0001 - Chalk	0002 - Gravel	0003 - Clay	0004 - Granite	0005 - Schist	0006 - Ivory	0007 - Wicker	0008 - Sand	0009 - Sienna	0010 - Bark	0011 - Pebble	0013 - Greige	0014 - Cinnamon	0015 - Lavender grey	0016 - Glacier	0017 - Bluebell
HANDRAILS																	
PERFORMER 2	p. 66	*	*	*	*	*	*	*		*		*					*
STARLINE WITH PVC SHEATH	p. 68	*	*														
ANODISED STARLINE	p. 68																
DECOWOOD STARLINE	p. 70																
ESCORT WITH PVC SHEATH	p. 72	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
DECOWOOD ESCORT	p. 74																

▶ TWO-COLOUR COMBINATIONS

		0124 Chalk Bamboo	0102 Chalk Gravel	0107 Chalk Wicker	0121 Chalk Straw	0109 Chalk Sienna	1101 Pebble Chalk	1120 Pebble Denim	1127 Pebble Melon	1105 Pebble Schist	1121 Pebble Straw
WALL PROTECTION TWO-COLOUR											
ALINEA 200	p. 32	*	*	*	*	*	*	*	*	*	*
ALINEA 120	p. 32	*	*	*	*	*	*	*	*	*	*
CORNER PROTECTORS TWO-COLOUR											
CORNEA	p. 49	*	*	*	*	*	*	*	*	*	*
PROTECTA 2	p. 52	*	*	*	*	*	*	*	*	*	*

▶ INSTALLATION CONDITIONS

If the products are to be installed in temperature conditions very different to 20°C (such as unheated premises in winter), take into account dimensional variations indicated in the below table.

Température in °C	Dimensional variations in mm for 1 linear meter	Comments
15	-1	Minimum temperature
20 (ideal temperature)	0	Ideal temperature
25	+1	Admissible temperature
30	+2	Maximum temperature

For detailed instructions, please refer to installation procedures brochure.

New

0018 - Azure	0019 - Ultramarine	0020 - Denim	0021 - Straw	0022 - Apricot	0023 - Meadow	0024 - Bamboo	0025 - Emerald	0027 - Melon	0028 - Poppy	0029 - Garnet	0030 - Iris	0060 - Maple	0061 - Beech	0062 - Light Oak	0063 - Cherry	0064 - Mature Oak	0065 - Stripped Pine	0066 - Cerused grey	0067 - Wenge	0051 - Composite	0050 - Brushed Alu	Two-colour (see p.82)
		*	*	*		*		*														
																						*
																						*
												*	*	*	*	*	*	*	*			
*	*	*	*	*	*	*	*	*	*	*	*											
												*	*	*	*	*	*	*	*			

*

On stock
(subject to stock
availability)

On order with a
minimum order
quantity ⁽¹⁾

(1) Minimum quantity:
200 ml within 4 to 8 weeks - depending on products
and colours

Band: Gravel Bamboo	Band: Gravel Chalk	Band: Gravel Denim	Band: Gravel Melon	Band: Gravel Straw	Band: Gravel Sienna

HANDRAILS STARLINE

STARLINE WITH PVC SHEATH CHALK	p. 68	*	*	*	*	*	*
STARLINE WITH PVC SHEATH GRAVEL	p. 68	*	*	*	*	*	*
ANODISED STARLINE	p. 68	*	*	*	*	*	*

DOCUMENTS AND SAMPLE CARDS AVAILABLE

SPM brochure



You will find in this catalogue, all relevant technical information on our products: cut to scale 1, description, application, colour palette....


Installation procedures



A guide which precisely details installation conditions and steps to follow.

Sample card

This tool has been created to help you choose colours in your projects. All colours from the SPM range are presented with moveable samples.

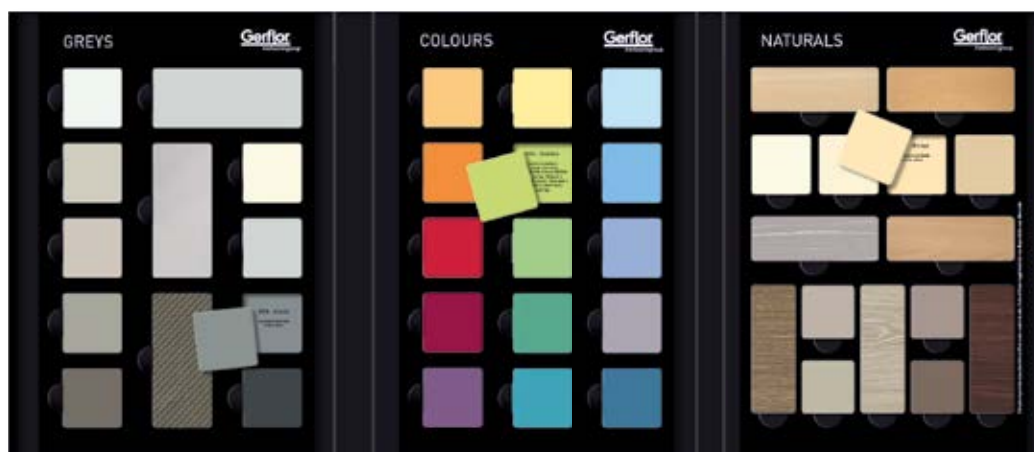



40 colours and decors
SPM palette

Two-colour band swatch
for the Starline handrail line



NOTES

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

ASIA: Gerflor Asia
Tel: +852 9222 6355 - Fax: +852 3006 1449
e-mail: gerflorasias@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)7229/70800-0 - Fax: +43 (0)7229/70800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbelgium@gerflor.com

CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor Floorings (CHINA) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

FINLAND: Gerflor OY
Tel: +358 (0) 10 617 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: SPM
Customer department: Tel: +33 (0)5 34 39 41 00 - Fax: +33 (0)5 34 39 41 02
e-mail: export@spm.fr

GERMANY: Gerflor Mipolam GmbH
Tel: 0 22 41-25 30-0
e-mail: GerflorMipolam@Gerflor.com
Kunden-Service: kundenservice@gerflor.com
Tel: 0 22 41-25 30-131 - Fax: 0 22 41-25 30-100
SAT Service und Anwendungstechnik: Technik@Gerflor.com
Tel: 0 22 41-25 30-555 - Fax: 0 22 41-25 30-550

IRELAND: Gerflor Ltd
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.
Tel: +39 02 90 78 60 12 r.a. - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East
Tel: +966 3 847 1779 - Fax: +966 3 847 1781
e-mail: gerflorME@gerflor.com

NETHERLANDS: Gerflor BV
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflorNL@gerflor.com

OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o.
Tel: +48 61 823 34 01 - Fax: +48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor Moscow Office
Tel: +7 499 783 63 69 / 81 - Fax: +7 499 783 62 52
e-mail: gerflorrus@mspk.east.ru

SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: +47 64 95 60 70 - Fax: +47 64 95 60 80
e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd
Tel: +44 (0) 1926 622 600 - Fax: +44 (0) 1926 401 647
e-mail: contractuk@gerflor.com

USA: Gerflor North America
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com

gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

RC Lyon B 726 580 152 - jpe - Photo credits : Polyclinique de Lormont (33) - BDM Architectes (33) : Nadège PETRUCCI /
Hôpital Nord Ouest de Villefranche (69) : Arnaud HAUTEROCHE - Printed in CEE 209 406 - 07/2013

Gerflor. Don't forget our complementary ranges!



Flooring




Entrance mats



Skirtings & Profiles

and Be CONNECTED!

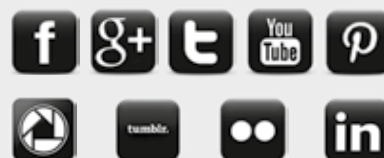

www.gerflor.com



Health
& Safety



ISO 14001



Recycling



Life Cycle
Analysis

Committed to sustainable development

Gerflor®
theflooringgroup