

MIPOLAM ESPRIT

gerflor.com

NEW



Gerflor®
theflooringgroup

MIPOLAM ESPRIT


 2 m	34-43	Evercare™	 100 % recyclable
--	-------	-----------	--



5375 Paprika
WR: 0585 2638
NCS: 2060-R / LRV: 18,7



5357 Chervil
WR: 0585 2636
NCS: 2060-G80Y / LRV: 38,3

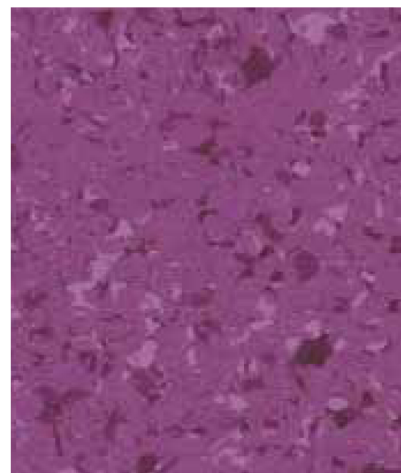


5368 Lavande
WR: 0585 2639
NCS: 3055-R40B / LRV: 11,5



5385 Safran
WR: 0585 2637
NCS: 2050-Y30R / LRV: 37,2



5347 Cardamon
WR: 0585 2591
NCS: 3030-G30Y / LRV: 29,0

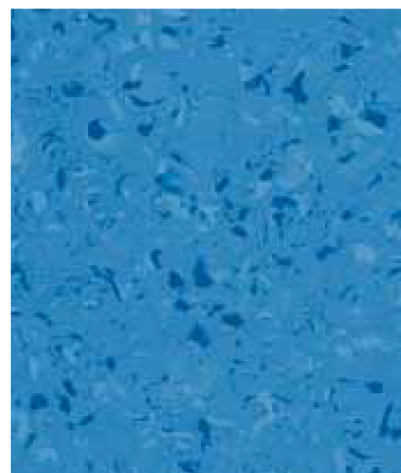

5366 Iris
WR: 0585 0262
NCS: 3040-B / LRV: 24,6



5322 Zest
WR: 0585 0192
NCS: 1050-Y / LRV: 51,8




5332 Turmeric
WR: 0585 0698
NCS: 1030-Y20R / LRV: 60,0



5356 Indigo
WR: 0585 2640
NCS: 3060-R80B / LRV: 11,8

MIPOLAM ESPRIT




5330 Smoke
WR: 0585 0075
NCS: 4502-B / LRV: 28,3



5354 Coriander
WR: 0585 0645
NCS: 3005-Y50R / LRV: 38,4




5324 Sesame
WR: 0585 2151
NCS: 1505-Y40R / LRV: 54,3

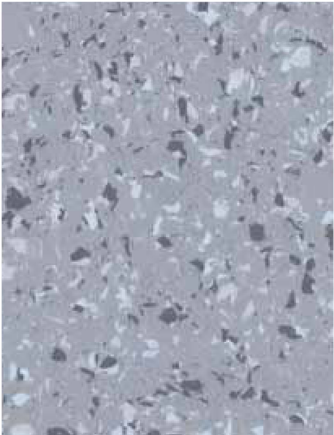

5320 Mixgrey
WR: 0585 0514
NCS: 3502-B / LRV: 36,9



5306 Mixblue
WR: 0585 2127
NCS: 1020-P90B / LRV: 54,5



5350 Slate
WR: 0585 0033
NCS: 5502-B / LRV: 19,5



5341 Peanut
WR: 0585 0645
NCS: 2002-Y50R / LRV: 42,9




5305 Garlic
WR: 0585 2343
NCS: 1002-Y50R / LRV: 64,9



5329 Curmin
WR: 0585 0509
NCS: 2502-B / LRV: 44,9



5310 Mixdim
WR: 0585 2633
NCS: 2005-R80B / LRV: 51,1



5360 Mixdark
WR: 0585 2238
NCS: 7502-B / LRV: 7,0




5363 Cinnamon
WR: 0585 2641
NCS: 4005-Y30R / LRV: 25,4



5303 Mixbeige
WR: 0585 2345
NCS: 1005-Y50R / LRV: 69,5



5340 Mist
WR: 0585 2635
NCS: 3500-N / LRV: 34,7

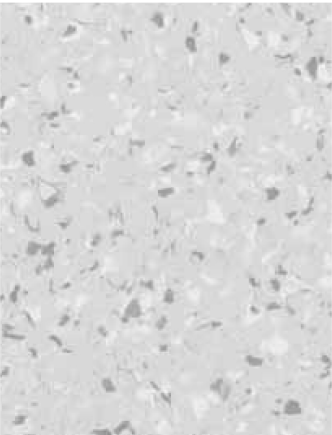


5312 White Pepper
WR: 0585 2415
NCS: 1502-B / LRV: 58,6



Tiles (608 x 608 mm) available for a minimum order quantity of 500m² - WR: welding rod - LRV: Light Reflectance Value

MIPOLAM ESPRIT

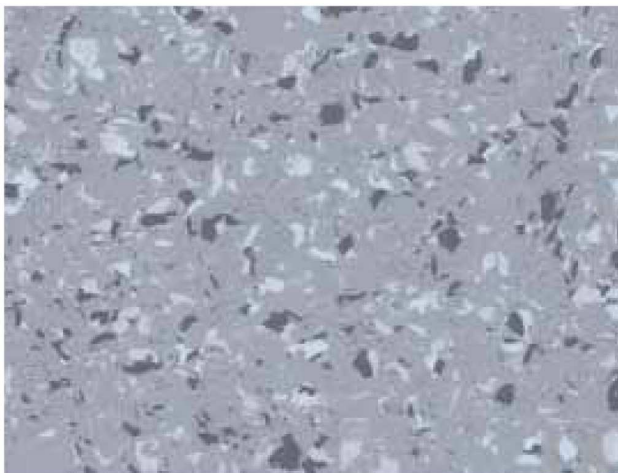


5320 Mixgrey
WR: 0585 0514
NCS: 3502-B / LRV: 36,9



5306 Mixblue
WR: 0585 2127
NCS: 1020-R90B / LRV: 54,5




5329 Cumin
WR: 0585 0509
NCS: 2502-B / LRV: 44,9

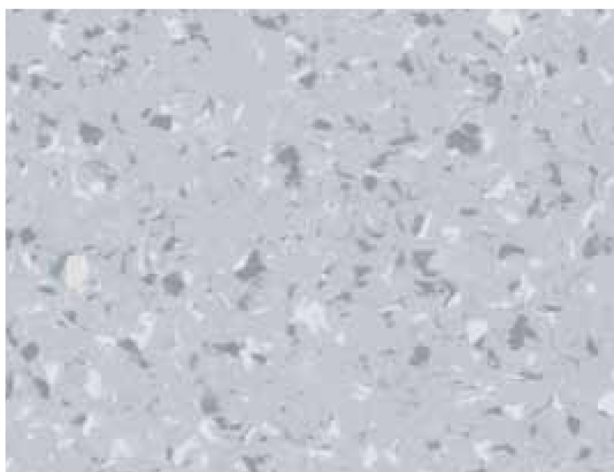

5310 Mixdim
WR: 0585 2633
NCS: 2005-R80B / LRV: 51,1




5340 Mist
WR: 0585 2635
NCS: 3500-N / LRV: 34,7

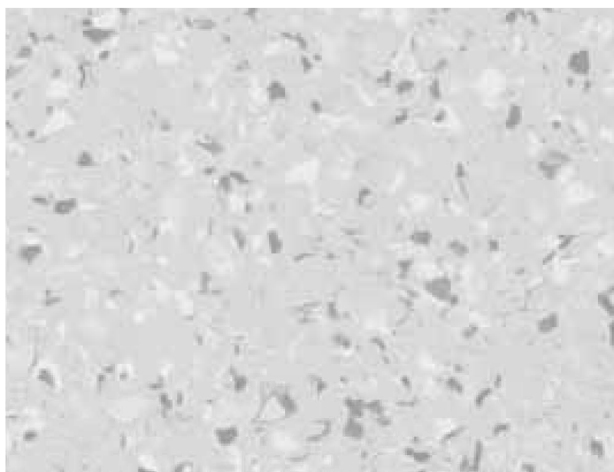

5312 White Pepper
WR: 0585 2415
NCS: 1502-B / LRV: 58,6

MIPOLAM ESPRIT

- ▶ High performance homogeneous flooring suitable for heavy duty traffic, available in sheet format.
- ▶ **Group T** wear rating compliant (very high resistance to traffic).
- ▶ Innovative true non-directional design, available in 24 colour tones.
- ▶ Modern surface with a matt finish.
- ▶ Evercare™ surface treatment: no wax for life.
- ▶ Bacteriostatic and fungistatic treatment for a better hygiene.
- ▶ 100% recyclable.

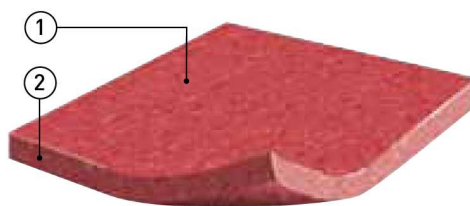

- ① **evercare™** treatment
- ② Densely compacted surface



evercare™ TECHNOLOGY

Patented Gerflor Technology

- ▶ Obtained by UV laser cross-linking

High Performance

- ▶ Durability & Resistance

Easy maintenance

- ▶ No wax for life

Low Environmental Impact

- ▶ Saves water and detergent

GERFLOR TREATED **evercare™**

Extreme stain resistance (Eosin test)



INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

No emulsion is required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available from Gerflor.

DESCRIPTION / BESCHREIBUNG / DESCRIPTION / BESCHRIJVING / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE

Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Espessura total</i> / Spessore totale	EN 428	mm	2
	ASTM F386-02	inch	0.080
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN 430	g/m ²	2780
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli	EN 426	cm/lm	200/20
	-	feet - inch	6'6" / 66"
Coverage / roll	-	m ²	40
	-	sq.ft	430.56

CLASSIFICATION / KLASSIFIZIERUNG / CLASSIFICATION / CLASSIFICATIE / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 649
	ASTM F 1913-04	-	compliant
European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europeia</i> / Europea	EN 685	class	34-43
K rating / <i>Beanspruchungsklasse</i> / Classement K / <i>K classificatie</i> / Clasificación K / <i>Classificação K</i> / Classificazione K	-	class	K5
	EN 13501-1	class	Bfl - s1
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	ASTM E648-08	class	Class 1
	CAN/ULC 102.2	-	-
Slip resistance wet / <i>Rutschhemmung</i> / Glissance humide / <i>Anti-slip</i> / Deslizamiento húmedo / <i>Escorregamento húmido</i> / Scivolosità umida	DIN 51130 / BGR 181	class	R9

PERFORMANCE / TECHNISCHE EIGENSCHAFTEN / PERFORMANCES / TESTRESULTAAT / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione	EN 660.2	mm ³	≤ 2.0
Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvasheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione	EN 649	group	T
Type binder content / <i>Bindenmittelgehalt</i> / Teneur en agent liant	ISO 10581	Type	I
Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale	EN 434	%	Sheet ≤ 0.40
Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçoamento</i> / Impronta	EN 433	mm	0.03
Castor chair test / <i>Stuhlrollenbeanspruchung</i> / Essai de la chaise à roulettes / <i>Rolweerstand bureaustoelen</i> / Determinación del efecto de una silla con ruedas / <i>Resistência a cadeiras de rodas</i> / Resistenza al passaggio di sedie con rotelle (Type W / Typ W)	EN 425	-	OK
Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica	EN 12 524	W/(m.K)	0.25
Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 B02	degree	≥ 6
Dekontaminierbarkeit	DIN 25415-1 / ISO 8690		Sehr gut
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN 423	class	OK beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.
Fungistatic and bacteriostatic treatment / <i>Fungistatisch und bakterioatisch</i> / Fongistatique et bactériostatique / <i>Bacteriologisch en schimmelwerend</i> / Bacteriostático y fungistático / <i>Bacteriostático e fungistático</i> / Batteriostatico e micostatico	-	-	OK
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	Evercare™
TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni)	ISO 16000-6	µg/m ³	< 10

CE marking / CE Kennzeichnung / Marquage CE / EG-conformiteitsmerk / Marca de conformidad CE / Marca de conformidade CE / Marcatura CE di conformità

CE	EN 14041	-	  
		-	



Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Entrance mats



Skirtings & Profiles

and Be CONNECTED!



www.gerflor.com



Health & Safety



ISO 14001



Recycling



Life Cycle Analysis