

Booster



1873 - Santafe Pearl

COMFORTABLE
& ECONOMICAL



1



2



3



4



5



6



7

WOOD

1-Jersey Clear

2m - Code: 1371 1894 - EAN: 3475710337956

4m - Code: 1391 1894 - EAN: 3475710336638

2-Nordic Beige

2m - Code: 1371 1689 - EAN: 3475710317231

4m - Code: 1391 1689 - EAN: 3475710317194

3-Santafe Brown

2m - Code: 1371 1907 - EAN: 3475710337949

4m - Code: 1391 1907 - EAN: 3475710337536

4-Santafe Pearl

2m - Code: 1371 1873 - EAN: 3475710337932

4m - Code: 1391 1873 - EAN: 3475710334771

5-Farm Pecan

2m - Code: 1371 1536 - EAN: 3475710319808

4m - Code: 1391 1536 - EAN: 3475710303043

6-Factory Perle

2m - Code: 1371 1535 - EAN: 3475710316852

4m - Code: 1391 1535 - EAN: 3475710317125

7-Chalet Pecan

2m - Code: 1371 1516 - EAN: 3475710316869

4m - Code: 1391 1516 - EAN: 3475710317132



1



2



3



4



5



1812 - Walnut Acajou

1-Rosewood Plank

2m - Code: 1372 1760 - EAN: 3475710319617
4m - Code: 1392 1760 - EAN: 3475710319501

2-Walnut Acajou

2m - Code: 1371 1812 - EAN: 3475710325342
4m - Code: 1391 1812 - EAN: 3475710320484

3-Boston Pecan

2m - Code: 1371 1722 - EAN: 3475710316821
4m - Code: 1391 1722 - EAN: 3475710317095

4-Boston Blond

2m - Code: 1371 1618 - EAN: 3475710316807
4m - Code: 1391 1618 - EAN: 3475710317071

5-Chene Naturel

2m - Code: 1371 1805 - EAN: 3475710319457
4m - Code: 1391 1805 - EAN: 3475710319440

6-Boston Sand

2m - Code: 1371 1723 - EAN: 3475710316838
4m - Code: 1391 1723 - EAN: 3475710317101

7-Chene Light

2m - Code: 1372 0669 - EAN: 3475710319600
4m - Code: 1392 0669 - EAN: 3475710319495

8-Manitoba Hetre

2m - Code: 1372 0402 - EAN: 3475710319587
4m - Code: 1392 0402 - EAN: 3475710319471



0402 - Manitoba Hetre



6



7



8



1



2



3



4



5



6

MINERAL



7



8



9



10



11



12



1762 - Valley Nature

1-Valley Grey

2m - Code: 1372 1763 - EAN: 3475710319648
4m - Code: 1392 1763 - EAN: 3475710319532

2-Valley Light

2m - Code: 1372 1761 - EAN: 3475710319624
4m - Code: 1392 1761 - EAN: 3475710319518

3-Valley Nature

2m - Code: 1372 1762 - EAN: 3475710319631
4m - Code: 1392 1762 - EAN: 3475710319525

4-Cassiopee Light Grey

2m - Code: 1372 1766 - EAN: 3475710319679
4m - Code: 1392 1766 - EAN: 3475710319563

5-Cassiopee Light

2m - Code: 1372 1765 - EAN: 3475710319662
4m - Code: 1392 1765 - EAN: 3475710319556

6-Dallus Beige

2m - Code: 1372 1764 - EAN: 3475710319655
4m - Code: 1392 1764 - EAN: 3475710319549

7-Eden Taupe

2m - Code: 1371 1525 - EAN: 3475710316883
4m - Code: 1391 1525 - EAN: 3475710317156

8-Eden Anthracite

2m - Code: 1371 1524 - EAN: 3475710316876
4m - Code: 1391 1524 - EAN: 3475710317149

9-Calvi Beton

2m - Code: 1371 1729 - EAN: 3475710319792
4m - Code: 1391 1729 - EAN: 3475710303036

10-Patio Dark

2m - Code: 1371 1813 - EAN: 3475710325359
4m - Code: 1391 1813 - EAN: 3475710320491

11-Spa Cream

2m - Code: 1391 1920 - EAN: 3475710339608
4m - Code: 1391 1920 - EAN: 3475710339585

12-Spa Silver Grey

2m - Code: 1391 1919 - EAN: 3475710339592
4m - Code: 1391 1919 - EAN: 3475710339578

13-Patio Terracotta

2m - Code: 1372 1471 - EAN: 3475710319594
4m - Code: 1392 1471 - EAN: 3475710319488

14-Dragee coquillage

2m - Code: 1372 0085 - EAN: 3475710319570
4m - Code: 1392 0085 - EAN: 3475710319464

15-Damier Black & White

2m - Code: 1372 0015 - EAN: 3475710321856
4m - Code: 1392 0015 - EAN: 3475710318917



13



14



15



TECHNICAL CHARACTERISTICS

Booster

Total thickness	EN 428	mm	2.60
Thickness of the wear-layer	EN 429	mm	0.25
Weight / Mass per unit area	EN 430	g/sqm	1725
Width of sheet	EN 426	m	2 / 3 / 4
Length of sheet	EN 426	ml	± 30
Surface treatment	-	-	TopFinish
Norm / Product specification	-	-	EN 653
European classification	EN 685	class	23/31
Fire rating - Classification	EN 13501-1	class	C _{fl} -s1
Wear group	EN 653	group	T
TVOC rate 28 days	-	µg/m ³	< 100
VOC rate (French norm)	-	-	A+
Impact sound insulation	EN ISO 717/2	dB	19
Room impact noise	NF S 31074	class	A
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10
Dimensional stability after exposure to heat	EN 434	%	0.05
Residual indentation	EN 433	mm	0.15
Thermal conductivity	EN 12 524	W/(m.k)	0.25
Colour fastness	EN 20 105-B02	degree	> 6
Wet rooms	-	-	OK
Floor heating	-	-	OK - T < 28°C
Static electrical probersity	NF EN 1815	kV	≤ 2
Guarantee		year	10

CE MARKING



EN 14041



Areas of use: domestic use






BOOSTER



INSTALLATION WITH
ACRYLIC GLUE

ALL USES

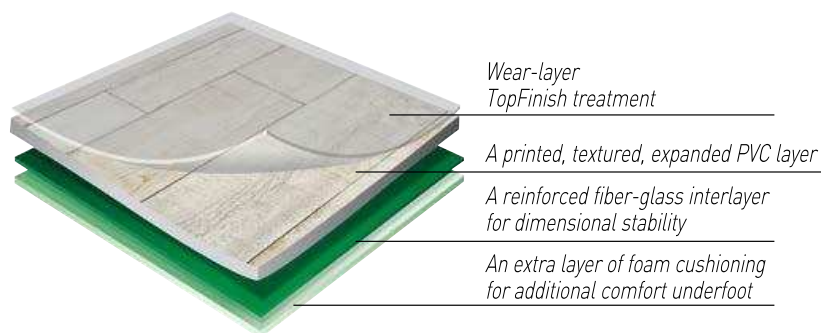

LAYING

The subfloor must be smooth, clean, dry, undamaged and flat.

Recommendations: unroll the floorcovering 24 hours before laying.

The floor covering should not be laid in a room if the temperature is below 15°C.

Laying on underfloor heating is possible (up to 28°C).

Weld the joints (cold-treatment product) to ensure good water-tightness.

If permanent laying with glue: use a single stick acrylic adhesive (approximately 250g/sq. m).

Use a finely-notched trowel.

CLEANING & CARE

Regular cleaning with a vacuum cleaner, dust mop or a wet cloth.

Cleaning: with water and a neutral detergent, rinse with clean water.

Stain removal: White Spirit removes almost all stains.

Do not use solvents.

Precautions: do not use floor wax.

Avoid rubber leg caps and casters.

Replace with plastic caps and polyamide casters.

Protect the bases and legs of your waxed furniture with a felt disc.



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning