

TECHNICAL CHARACTERISTICS

Booster

| | | | |
|--|---------------|-------------------|---------------------|
| Total thickness | EN 428 | mm | 2.60 |
| Thickness of the wear-layer | EN 429 | mm | 0.25 |
| Weight / Mass per unit area | EN 430 | g/sqm | 1725 |
| Width of sheet | EN 426 | m | 2 / 3 / 4 |
| Length of sheet | EN 426 | ml | ± 30 |
| Surface treatment | - | - | TopFinish |
| Norm / Product specification | - | - | EN 653 |
| European classification | EN 685 | class | 23/31 |
| Fire rating - Classification | EN 13501-1 | class | C _{fl} -s1 |
| Wear group | EN 653 | group | T |
| TVOC rate 28 days | - | µg/m ³ | < 100 |
| VOC rate (French norm) | - | - | A+ |
| Impact sound insulation | EN ISO 717/2 | dB | 19 |
| Room impact noise | NF S 31074 | class | A |
| Slip resistance wet: ramp test with oil | DIN 51 130 | class | R10 |
| Dimensional stability after exposure to heat | EN 434 | % | 0.05 |
| Residual indentation | EN 433 | mm | 0.15 |
| Thermal conductivity | EN 12 524 | W/(m.k) | 0.25 |
| Colour fastness | EN 20 105-B02 | degree | > 6 |
| Wet rooms | - | - | OK |
| Floor heating | - | - | OK - T < 28°C |
| Static electrical probersity | NF EN 1815 | kV | ≤ 2 |
| Guarantee | | year | 10 |

CE MARKING



EN 14041



Areas of use: domestic use






BOOSTER



INSTALLATION WITH
ACRYLIC GLUE

ALL USES

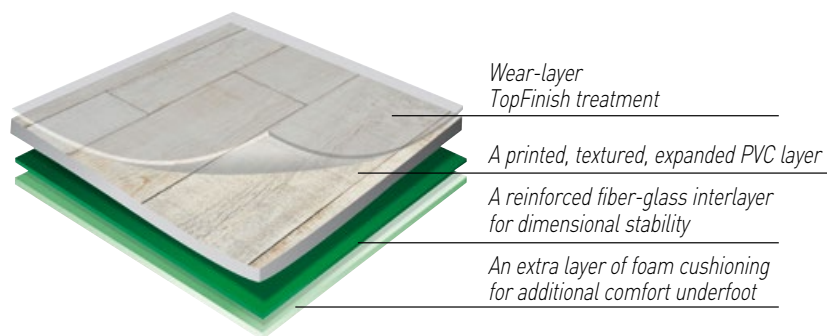

LAYING

The subfloor must be smooth, clean, dry, undamaged and flat.

Recommendations: unroll the floorcovering 24 hours before laying.

The floor covering should not be laid in a room if the temperature is below 15°C.

Laying on underfloor heating is possible (up to 28°C).

Weld the joints (cold-treatment product) to ensure good water-tightness.

If permanent laying with glue: use a single stick acrylic adhesive (approximately 250g/sq. m).

Use a finely-notched trowel.

CLEANING & CARE

Regular cleaning with a vacuum cleaner, dust mop or a wet cloth.

Cleaning: with water and a neutral detergent, rinse with clean water.

Stain removal: White Spirit removes almost all stains.

Do not use solvents.

Precautions: do not use floor wax.

Avoid rubber leg caps and casters.

Replace with plastic caps and polyamide casters.

Protect the bases and legs of your waxed furniture with a felt disc.



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning