

Clever



0381 - Turku Clair

TIMELESS
& ECONOMICAL



1



2



3



4

1-Manitoba Tundra

2m - Code : 1270 0107 - EAN : 3475710064326

3m - Code : 1774 0107 - EAN : 3475710064319

4m - Code : 1840 0107 - EAN : 3475710063329

2-Turku Clair

2m - Code : 1270 0381 - EAN : 3475710084126

3m - Code : 1774 0381 - EAN : 3475710081200

4m - Code : 1840 0381 - EAN : 3475710081194

3-Merak Clair

4m - Code : 1840 0614 - EAN : 3475710306228

4-Ardentès Noyer

2m - Code : 1270 0025 - EAN : 3475710037825

3m - Code : 1774 0025 - EAN : 3475710037733

4m - Code : 1840 0025 - EAN : 3475710037115

5-Biarritz Acier

2m - Code : 1270 1108 - EAN : 3475710186271

4m - Code : 1840 1108 - EAN : 3475710186172

6-Biarritz Noir

2m - Code : 1270 1107 - EAN : 3475710186264

4m - Code : 1840 1107 - EAN : 3475710186165

7-Biarritz Gris

2m - Code : 1270 1008 - EAN : 3475710186257

4m - Code : 1840 1008 - EAN : 3475710186158

8-Silice Gris

2m - Code : 1270 0011 - EAN : 3475710089244


3m - Code : 1774 0011 - EAN : 3475710089237

4m - Code : 1840 0011 - EAN : 3475710089220

9-Damier Black & White

3m - Code : 1774 0015 - EAN : 3475710089299

4m - Code : 1840 0015 - EAN : 3475710089282

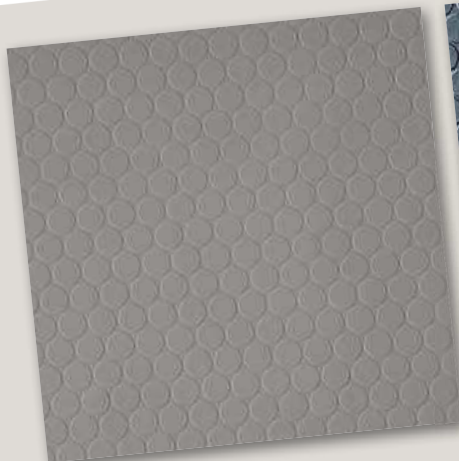


5




6



7

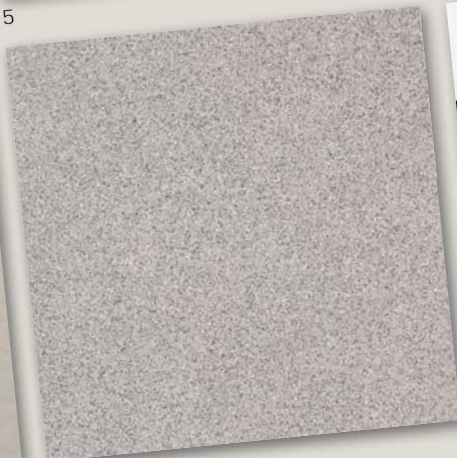

8

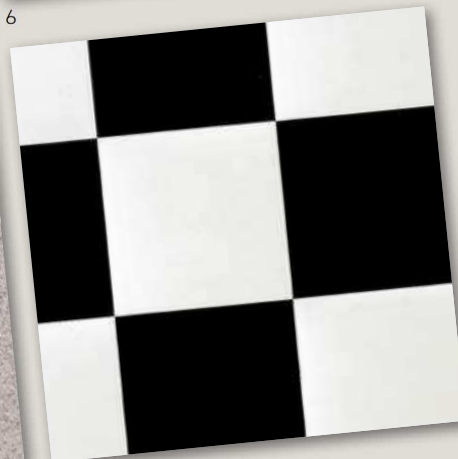

9



1



2



3



4



5



6



1692- Matera Crema

1-Utah Beige

2m - Code : 1270 0581 - EAN : 3475710089312
3m - Code : 1774 0581 - EAN : 3475710089329
4m - Code : 1840 0581 - EAN : 3475710081309

2-Gravel Beige

2m - Code : 1270 0711 - EAN : 3475710168581
4m - Code : 1840 0711 - EAN : 3475710168543

3-Marengo Perle

2m - Code : 1270 0141 - EAN : 3475710064302
3m - Code : 1774 0141 - EAN : 3475710064296
4m - Code : 1840 0141 - EAN : 3475710060380

4-Matera Crema

2m - Code : 1270 1692 - EAN : 3475710306280
4m - Code : 1840 1692 - EAN : 3475710306259

5-Marl Grey

2m - Code : 1270 1582 - EAN : 3475710256097
3m - Code : 1774 1582 - EAN : 3475710256080
4m - Code : 1840 1582 - EAN : 3475710256073

6-Cassiopee Natural

2m - Code : 1270 0574 - EAN : 3475710099496
3m - Code : 1774 0574 - EAN : 3475710099489
4m - Code : 1840 0574 - EAN : 3475710099472

TECHNICAL CHARACTERISTICS



A clear PVC wear-layer

A printed, textured, expanded PVC layer

Glass fiber interlayer with dimensional stability

An extra layer of vinyl

Total thickness	EN 428	mm	1.2
Thickness of the wear-layer	EN 429	mm	0.15
Weight / Mass per unit area	EN 430	g/m ²	1075
Width of sheet	EN 426	cm	200 / 300 / 400
Length of sheet	EN 426	ml	± 35
Surface treatment	-	-	Diamalite
Fire rating - Classification	EN 13501-1	class	B _f -s1
Wear group	EN 653	group	T
Impact sound insulation	EN ISO 717-2	dB	10
Room impact noise	NF S 31074	class	A
Colour fastness	EN 20 105-B02	degree	> 6
Guarantee	-	years	5
VOC rate (French norm)	-	-	A+
TVOC rate 28 days	-	µg/m ³	< 100

CE MARKING



Areas of use: domestic



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning



Diamalite is a special additive within the wear-layer that makes cleaning easier.

LAYING

Laying recommendations: Gerflor floorcoverings are high quality products developed for a long life.

Any warranty claim will only be considered if the product has been laid according to the following specifications:

The subfloor must be smooth, hard, dry and clean.

Unroll the floorcovering 24 hours before it is due to be installed.

During laying, the room temperature may not be below 18°C, and the ground temperature below 15°C.

Permanent installation/full stick:

Use a single stick acrylic glue (approx. 250 g/sq.m)

Use a finely notched trowel and cold weld the joints.

CLEANING & CARE

Initial cleaning: Before commencing a regular maintenance programme, an initial cleaning of the floor will be necessary to remove dirt accumulated during installation and other building works. Remove debris, sweep floor and vacuum to remove loose dirt. Wash floor with damp mop and bucket containing cold water and neutral detergent. Replace the water and solution if necessary. Remove stubborn marks with a non-abrasive pad.

Maintenance: Remove loose dirt with a broom or vacuum cleaner. Wash floor with damp mop and bucket with cold water.

Cleaning: Frequency of periodic maintenance will depend on the level of traffic and on the nature of the installation. Wash floor with damp mop and bucket containing cold water and neutral detergent.

Discoloration: All resilient floor covering can discolour due to the transference of colouring substances. Contact with bituminous materials, mastic, asphalt, oil, shoes with black rubber soles, or rubber rollers may cause discoloration.