

Focus



0381 - Turku Clair

TRENDY DESIGNS
& ECONOMICAL



1



2



3

1-Manitoba Toundra

2m - Code : 1276 0107 - EAN : 3475710166631

3m - Code : 1772 0107 - EAN : 3475710167607

4m - Code : 1838 0107 - EAN : 3475710166532

2-Turku Clair

2m - Code : 1276 0381 - EAN : 3475710166624

4m - Code : 1838 0381 - EAN : 3475710166525

3-Manitoba Erable

2m - Code : 1276 0046 - EAN : 3475710104121

3m - Code : 1772 0046 - EAN : 3475710103803

4m - Code : 1838 0046 - EAN : 3475710103483

4-Ardentes Noyer

2m - Code : 1276 0025 - EAN : 3475710208652

3m - Code : 1772 0025 - EAN : 3475710167584

4m - Code : 1838 0025 - EAN : 3475710180958

5-Kirch Medium

2m - Code : 1276 0680 - EAN : 3475710250217

3m - Code : 1772 0680 - EAN : 3475710250835

4m - Code : 1838 0680 - EAN : 3475710250200

6-Teck Brown

2m - Code : 1276 0302 - EAN : 3475710082337

3m - Code : 1772 0302 - EAN : 3475710082252

4m - Code : 1838 0302 - EAN : 3475710080845

7-Cajou Oak

2m - Code : 1276 1150 - EAN : 3475710208508

3m - Code : 1772 1150 - EAN : 3475710208478

4m - Code : 1838 1150 - EAN : 3475710208447

8-Toronto Brown

2m - Code : 1276 0677 - EAN : 3475710164811

4m - Code : 1838 0677 - EAN : 3475710164729



4



5



6



7



8



1

1-Gravel Grey

2m - Code : 1276 0712 - EAN : 3475710164071

3m - Code : 1772 0712 - EAN : 3475710250828

4m - Code : 1838 0712 - EAN : 3475710163548

2-Titane Acier

2m - Code : 1276 1123 - EAN : 3475710233838

4m - Code : 1838 1123 - EAN : 3475710233777

3-Silice Gris

2m - Code : 1276 0111 - EAN : 3475710166709

4m - Code : 1838 0111 - EAN : 3475710166600

4-Marl Grey

2m - Code : 1276 1582 - EAN : 3475710256066

3m - Code : 1772 1582 - EAN : 3475710256059

4m - Code : 1838 1582 - EAN : 3475710256042

5-Utah Beige

2m - Code : 1276 0581 - EAN : 3475710104213

3m - Code : 1772 0581 - EAN : 3475710103865

4m - Code : 1838 0581 - EAN : 3475710103551

6-Gravel Beige

2m - Code : 1276 0711 - EAN : 3475710164064

3m - Code : 1772 0711 - EAN : 3475710221880

4m - Code : 1838 0711 - EAN : 3475710163531



2



3



4




5



0712 - Gravel Grey



6

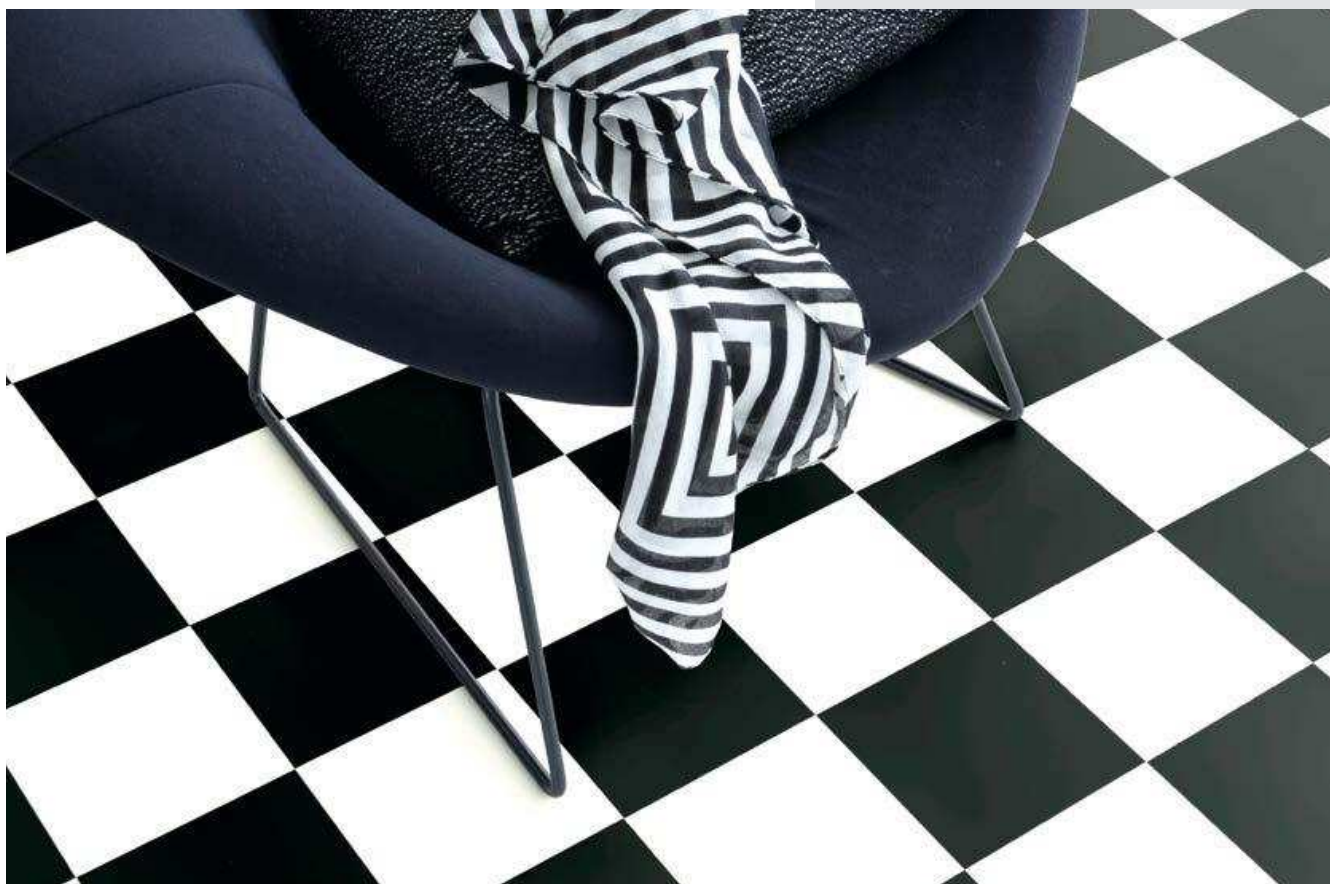

0015 - Damier Black & White



1



2

1-Damier Black & White

3m - Code : 1772 0015 - EAN : 3475710167614
4m - Code : 1838 0015 - EAN : 3475710166563

2-Melbourne Stone

2m - Code : 1276 0026 - EAN : 3475710164774
3m - Code : 1772 0026 - EAN : 3475710221965
4m - Code : 1838 0026 - EAN : 3475710164705

3-Melbourne Sandstone

2m - Code : 1276 0037 - EAN : 3475710119354
3m - Code : 1772 0037 - EAN : 3475710117794
4m - Code : 1838 0037 - EAN : 3475710164682

4-Cassiopee Natural

2m - Code : 1276 0574 - EAN : 3475710119354
3m - Code : 1772 0574 - EAN : 3475710117794
4m - Code : 1838 0574 - EAN : 3475710119347



3



4

TECHNICAL CHARACTERISTICS



A clear PVC wear-layer


A printed, textured, expanded PVC layer

Glass fiber interlayer with dimensional stability

An extra layer of vinyl

Total thickness	EN 428	mm	1.3
Thickness of the wear-layer	EN 429	mm	0.15
Weight / Mass per unit area	EN 430	g/m ²	1105
Width of sheet	EN 426	cm	200 / 300 / 400
Length of sheet	EN 426	ml	± 35
Surface treatment	-	-	Diamalite
Fire rating - Classification	EN 13501-1	class	Bfl-s1
Wear group	EN 653	group	T
Impact sound insulation	EN ISO 717-2	dB	10
Room impact noise	NF S 31074	class	A
Colour fastness	EN 20 105-B02	degree	> 6
Guarantee	-	years	5
VOC rate (French norm)	-	-	A+
TVOC rate 28 days	-	µg/m ³	< 100

CE MARKING

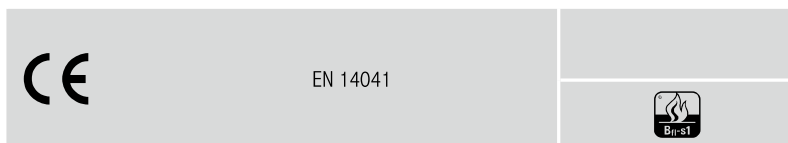

Areas of use: domestic



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning



Diamalite is a special additive within the wear-layer that makes cleaning easier.

LAYING

Laying recommendations: Gerflor floorcoverings are high quality products developed for a long life.

Any warranty claim will only be considered if the product has been laid according to the following specifications:

The subfloor must be smooth, hard, dry and clean.

Unroll the floorcovering 24 hours before it is due to be installed.

During laying, the room temperature may not be below 18°C, and the ground temperature below 15°C.

Permanent installation/full stick:

Use a single stick acrylic glue (approx. 250 g/sq.m)

Use a finely notched trowel and cold weld the joints.

CLEANING & CARE

Initial cleaning: Before commencing a regular maintenance programme, an initial cleaning of the floor will be necessary to remove dirt accumulated during installation and other building works. Remove debris, sweep floor and vacuum to remove loose dirt. Wash floor with damp mop and bucket containing cold water and neutral detergent. Replace the water and solution if necessary. Remove stubborn marks with a non-abrasive pad.

Maintenance: Remove loose dirt with a broom or vacuum cleaner. Wash floor with damp mop and bucket with cold water.

Cleaning: Frequency of periodic maintenance will depend on the level of traffic and on the nature of the installation. Wash floor with damp mop and bucket containing cold water and neutral detergent.

Discoloration: All resilient floor covering can discolour due to the transference of colouring substances. Contact with bituminous materials, mastic, asphalt, oil, shoes with black rubber soles, or rubber rollers may cause discoloration.