



TECHNICAL CHARACTERISTICS

Primetex

			Diamalite	Pureclean
Total thickness	EN 428	mm	2.0	
Thickness of the wear layer	EN 429	mm	0.20	0.25
Weight: Mass per unit area	EN 430	g/sqm	1370	1390
Width of rolls	EN 426	m	2 / 3 / 4	
Length of rolls	EN 426	ml	± 30	
Surface treatment	-	-	Diamalite	Pureclean
Norm / Product specification	-	-	EN 653	
European classification	EN 685	class	22	23/31
Fire rating - Classification	EN 13501-1	class	C _{fl} -s1	
Wear Group	EN 653	group	T	
VOC rate (French norm)	-	-	A+	
US norm Floorscore	-	-	OK	
German norm Agbb	-	-	OK	
TVOC rate 28 days	-	µg/m³	< 100	
Impact sound insulation	EN ISO 717/2	dB	15	
Room impact noise	NF S 31074	class	A	
Slip resistance wet: ramp test with oil	DIN 51 130	class	R9	R10
Dimensional stability	EN 434	%	0.05	
Residual indentation	EN 433	mm	0.25	
Thermal conductivity	EN 12 524	W/(m.k)	0.25	
Colour fastness	EN 20 105-B02	degree	≥ 6	
Wet rooms	-	-	OK	
Floor heating	-	-	OK - T < 28°C	
Static electrical probersity		kV	≤ 2	
Guarantee	-	year	8	12

CE MARKING



EN 14041



Areas of use: domestic use





⊖ THICK
⊕ RESISTANT!
**BEST VALUE
FOR MONEY**

PRIMETEX,
NON-TEAR!

Thin & tough!

PRIMETEX,
NO GLUE !

Economical, quick and easy to lay


Saves extra costs

PRIMETEX,
ALL USES FLOOR

Watertight: ideal for wet rooms

- bathroom, kitchen

Easy to clean & hygienic

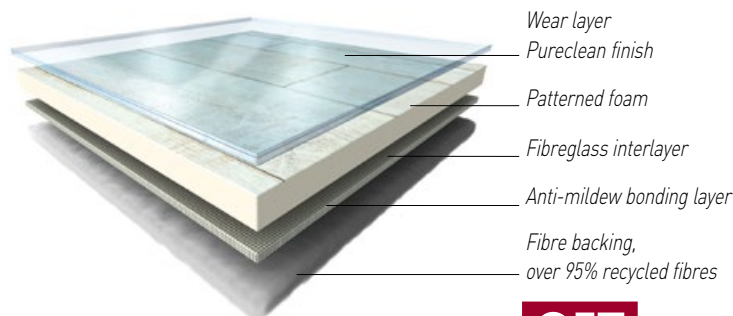

LAYING

The subfloor must be smooth, clean, dry, undamaged and flat.

Recommendations: unroll the floorcovering 24 hours before laying.

Floor covering should not be laid in rooms at a temperature is below 15°C.

Can be installed on underfloor heating (up to 28°C).

Weld the joints (cold-treatment product) to ensure good water-tightness.

Recommended laying methods:

- Loose laying without glue: up to 25 sq. m
- Laying without glue, with double-sided tape or hook & loop strips around the edges of the room: over 25 sq. m

If permanent laying with glue: use a single stick acrylic glue (approximately 250g/sq. m).

Use a finely-notched trowel.

CLEANING & CARE

Regular cleaning with a vacuum cleaner, dust mop or a wet cloth.

Cleaning: with water and a neutral detergent; rinse with clean water.

Stain removal: White Spirit removes almost all stains.

Do not use solvents.

Precautions: do not use floor wax.

Avoid rubber leg caps and casters. Replace with plastic caps and polyamide casters. Protect the bases and legs of your waxed furniture with a felt disc.



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- No glue
- GFT backing: >95% recycled fibres

ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning