



# TECHNICAL CHARACTERISTICS

Turbo

Total thickness	EN 428	mm	2.90
Thickness of the wear-layer	EN 429	mm	0.25
Weight / Mass per unit area	EN 430	g/sqm	1510
Width of sheet	EN 426	m	2 / 3 / 4
Length of sheet	EN 426	ml	± 30
Surface treatment	-	-	Diamalite
Norm / Product specification	-	-	EN 653
European classification	EN 685	class	22
Fire rating - Classification	EN 13501-1	class	Cfl-s1
Wear group	EN 653	group	T
VOC rate (French norm)	-	-	A+
German norm Agbb	-	-	OK
TVOC rate 28 days	-	µg/m <sup>3</sup>	< 100
Impact sound insulation	EN ISO 717/2	dB	19
Room impact noise	NF S 31074	class	A
Dimensional stability after exposure to heat	EN 434	%	0.05
Residual indentation	EN 433	mm	0.20
Thermal conductivity	EN 12 524	W/(m.k)	0.25
Colour fastness	EN 20 105-B02	degree	> 6
Wet rooms	-	-	OK
Floor heating	-	-	OK - T < 28°C
Static electrical probersity	NF EN 1815	≤ 2 kV	≤ 2 kV
Guarantee	-	year	5

## CE MARKING



EN 14041



Areas of use: domestic



Diamalite is a special additive within the wear-layer that makes cleaning easier.




TURBO



INSTALLATION WITH  
ACRYLIC GLUE

ALL USES

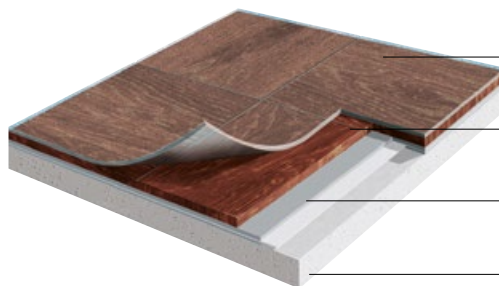

*A clear PVC wear-layer*

*A printed, textured,  
expanded PVC layer*

*A reinforced fiber-glass interlayer  
for dimensional stability*

*An extra layer of foam cushioning  
for additional comfort underfoot*

## LAYING

The subfloor must be smooth, clean, dry, undamaged and flat.

**Recommendations:** unroll the floorcovering 24 hours before laying.

The floor covering should not be laid in a room if the temperature is below 15°C.

Laying on underfloor heating is possible (up to 28°C).

Weld the joints (cold-treatment product) to ensure good water-tightness.

**If permanent laying with glue:** use a single stick acrylic adhesive (approximately 250g/sq. m).

Use a finely-notched trowel.

## CLEANING & CARE

Regular cleaning with a vacuum cleaner, dust mop or a wet cloth.

**Cleaning:** with water and a neutral detergent, rinse with clean water.

**Stain removal:** White Spirit removes almost all stains.

Do not use solvents.

**Precautions:** do not use floor wax.

Avoid rubber leg caps and casters.

Replace with plastic caps and polyamide casters.

Protect the bases and legs of your waxed furniture with a felt disc.



### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

### ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning